


Referensdesign från displayens datablad




Referensdesign från displayens datablad



För att möjligtvis förlänga livslängden



Spänningsomvandlare

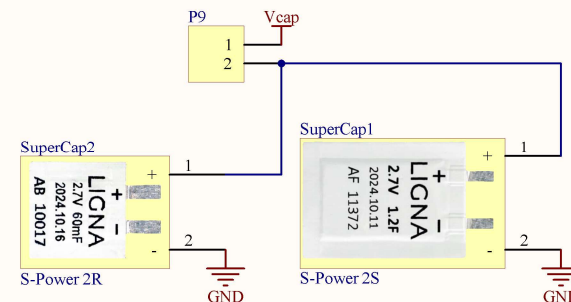

Title		
Size A4	Number	Revision
Date:	4-09-2025	Sheet of
File:	C:\Users\A\DisplayDrive\SchDoc	Drawn By:

The schematic diagram illustrates the hardware design for an STM32L431CCU6 microcontroller. It is organized into four horizontal sections (A, B, C, D) and four vertical columns (1, 2, 3, 4).

- Section A:** Shows the MCU (STM32L431CCU6) and its connections to various peripherals. Key components include:
 - UART1:** Connected to a header (P2) with pins 1-6 for TX, RX, CTS, RTS, DE, and SWCLK.
 - I2C:** Connected to an NFC module (NTP53321G0JHKZ) via SDA1 and SCL1.
 - NFC-brygga:** A custom board for NFC to I2C conversion, featuring an antenna (ANT1) and a decoupling network (C17, C18).
 - Power:** VDD, VSS, and VREF+ connections are shown, along with a decoupling network (C19, C20, C21, C22).
 - Timing:** XTAL32IN and XTAL32OUT are connected to a crystal (X2) and a timing network (C23).
- Section B:** Shows the power supply and decoupling network. Key components include:
 - Power:** VDD, VSS, and VREF+ connections are shown, along with a decoupling network (C19, C20, C21, C22).
 - Timing:** XTAL32IN and XTAL32OUT are connected to a crystal (X2) and a timing network (C23).
- Section C:** Shows the clock and timing circuitry. Key components include:
 - Timing:** XTAL32IN and XTAL32OUT are connected to a crystal (X2) and a timing network (C23).
- Section D:** Shows the LED drivers and other peripheral connections. Key components include:
 - LEDs:** LED1 and LED2 are connected to the MCU via current-limiting resistors (R15, R16).
 - Header 3:** A 3-pin header for JTAG-SWDIO, JTAG-SWCLK, and BOOT0.

The diagram includes a title block at the bottom right with the following information:

Title		
Size	Number	Revision
A4		
Date:	4-09-2025	Sheet of
File:	C:\Users\...DigitalBlad.SchDoc	Drawn By: