Ignytion io

IGNYTION IO · TECHNICAL LAB NOTE

From APB Writes to an Analogue Voltage

Recorded RTL PWM driving an ideal RC filter in ngspice

A pulse-width-modulated signal alternates between two voltage levels. An RC filter smooths that waveform into a voltage whose settled mean depends on duty cycle. This experiment controls the PWM through an APB register interface, records its actual RTL output, and uses that record to drive ngspice. An independent RC solution checks the analogue waveform.

SECTION 01

A checked signal path across two simulators

The digital run passes **102,898 comparisons**. Five duty settings produce the expected settled mean voltages, and the complete analogue responses agree with the declared RC reference tolerance.

DUTY	TARGET MEAN	OBSERVED MEAN
0%	0.00 V	0.000000 V
25%	0.45 V	0.450000 V
50%	0.90 V	0.900000 V
75%	1.35 V	1.350000 V
100%	1.80 V	1.800000 V

The simulator interface is explicit

This is a **recorded, feed-forward PWL interface**. RTL finishes first; ngspice then reads its voltage waveform. There is no live shared-library connection, two-way analogue feedback, or transistor-level output driver in this experiment.

Crucible is beta. The project environment binds Icarus Verilog 14.0.0 and ngspice 46. A project-local FFTW runtime enables the installed simulator payload; the local reproduction dependency remains visible.

SECTION 02

Control a digital PWM over APB

The slave implements **setup and access phases** without wait states. Writes take effect when selection and enable are both asserted.

ADDRESS	REGISTER	BEHAVIOUR
0x00	Enable	Bit 0 enables PWM; disable drives low
0x04	Duty	Integer 0..256 · readback supported
Other	Error	Unknown/unaligned access reports error

The counter has **256 clock states**. The output is high when the unsigned counter is less than duty. Duty zero stays low; duty 256 stays high. A 1 MHz test clock gives a 256 µs PWM period.

Reset clears enable, duty, and counter. A duty write restarts the counter. Writes above 256 report an error and retain the old duty. These choices define a small control peripheral; glitch-free updates during an active period are not claimed.

The test holds a setup phase across several edges and checks that it cannot write a register. It also checks readback, rejected writes, invalid addresses, disable, and reset.

SECTION 03

Translate the recorded signal accurately

The test records **one digital value per clock** for 80 complete periods at each duty. PWM changes only on clock edges, so the samples retain every level transition in these static-duty tests.

BOUNDARY	DECLARED MAPPING
Digital low / high	0 V / 1.8 V
Recorded time	Nanoseconds converted to seconds
Transition shape	1 ns linear voltage ramp
Initial condition	Capacitor voltage starts at zero
Recorded duration	80 × 256 µs = 20.48 ms per case

The bridge compresses repeated levels into a **piecewise-linear (PWL)** voltage source. Every source is checked against the original digital record for level, transition count, transition time, and ramp duration.

A half-amplitude source is deliberately passed to the same mapping observer. It fails the level comparison. This checks that a successful ngspice launch cannot hide an incorrect logic-to-voltage conversion.

> **Sampling defines the time reference**
> Each capture starts a local time axis at its first sample. The example preserves duty and period; it does not measure latency from an APB write to an analogue output transition.

SECTION 04

Understand the RC filter

A **10 kΩ resistor** feeds a **100 nF capacitor** to ground. The time constant is τ = RC = 1 ms. The voltage source is the recorded PWM waveform.

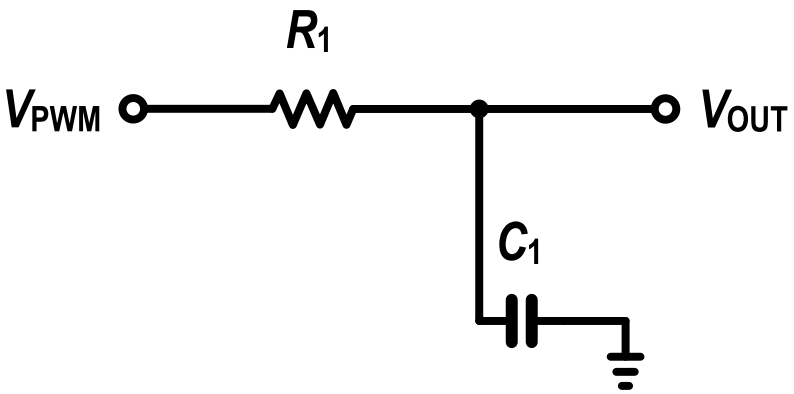


Figure 1 · Ideal first-order RC filter · R1 = 10 kΩ · C1 = 100 nF

The capacitor charges towards the source voltage and discharges when the source goes low. Because the PWM period is shorter than τ, the output changes more slowly than the input and retains visible ripple.

INDEPENDENT REFERENCE

For a constant source, **v(t) = u + [v(0) − u] exp(−t/τ)**. The verifier extends this exact solution to each linear PWL segment, including the 1 ns ramps, and compares it at every saved ngspice time point.


The acceptance limit is **0.5 mV maximum pointwise error**. This measures solver agreement for an ideal linear circuit. It does not establish component tolerance, model accuracy, or hardware error.

SECTION 05

Observe settling and mean voltage

The capacitor begins at **zero volts** in each separate case. The five simulations cover 0%, 25%, 50%, 75%, and 100% duty.

NGSPICE OUTPUT · FIVE RECORDED DUTY SETTINGS

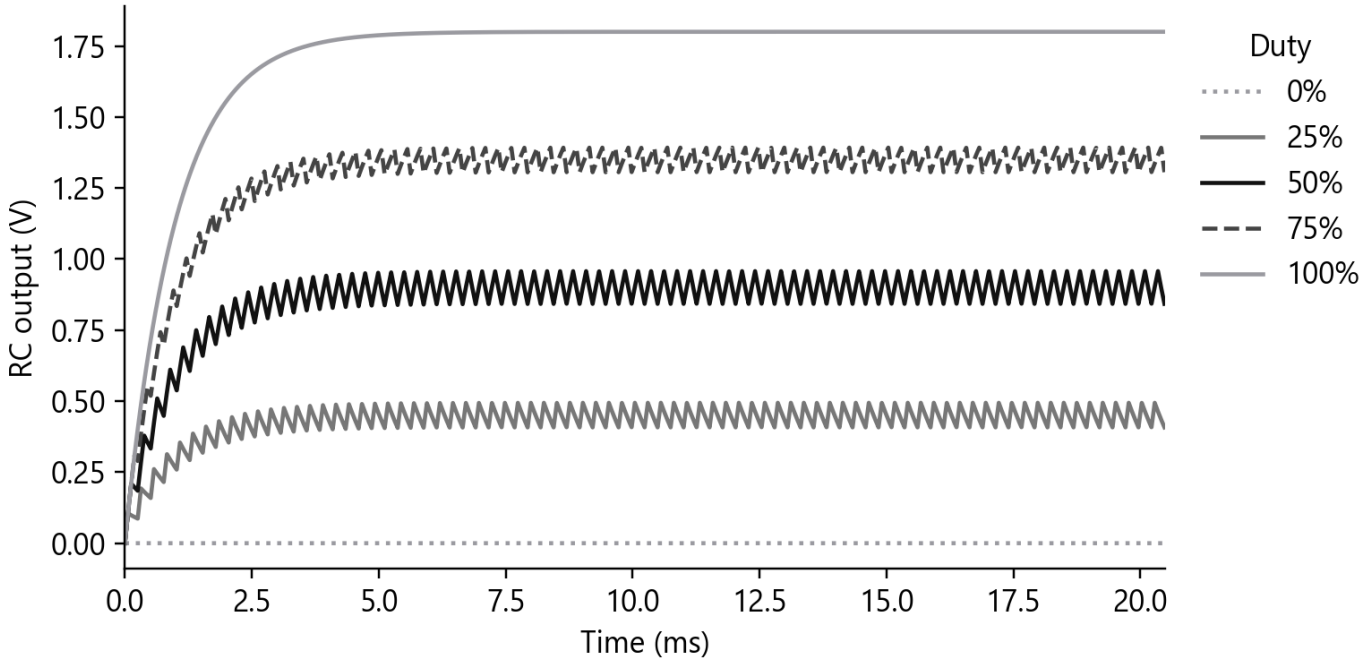

The settled mean is measured over the **last 20 complete PWM periods**, from 15.36 ms to 20.48 ms. Integrating over whole periods avoids selecting an arbitrary ripple phase.


The declared mean target is **1.8 V × duty/256**, with a 5 mV tolerance. All five cases pass. The displayed decimal places describe deterministic simulation output; they are not a statement of analogue accuracy on a board.

SECTION 06

Mean voltage does not remove ripple

At **50% duty**, the mean is approximately 0.9 V, while the waveform still rises and falls within each PWM period.

FINAL FOUR PWM PERIODS · HALF-SCALE DUTY

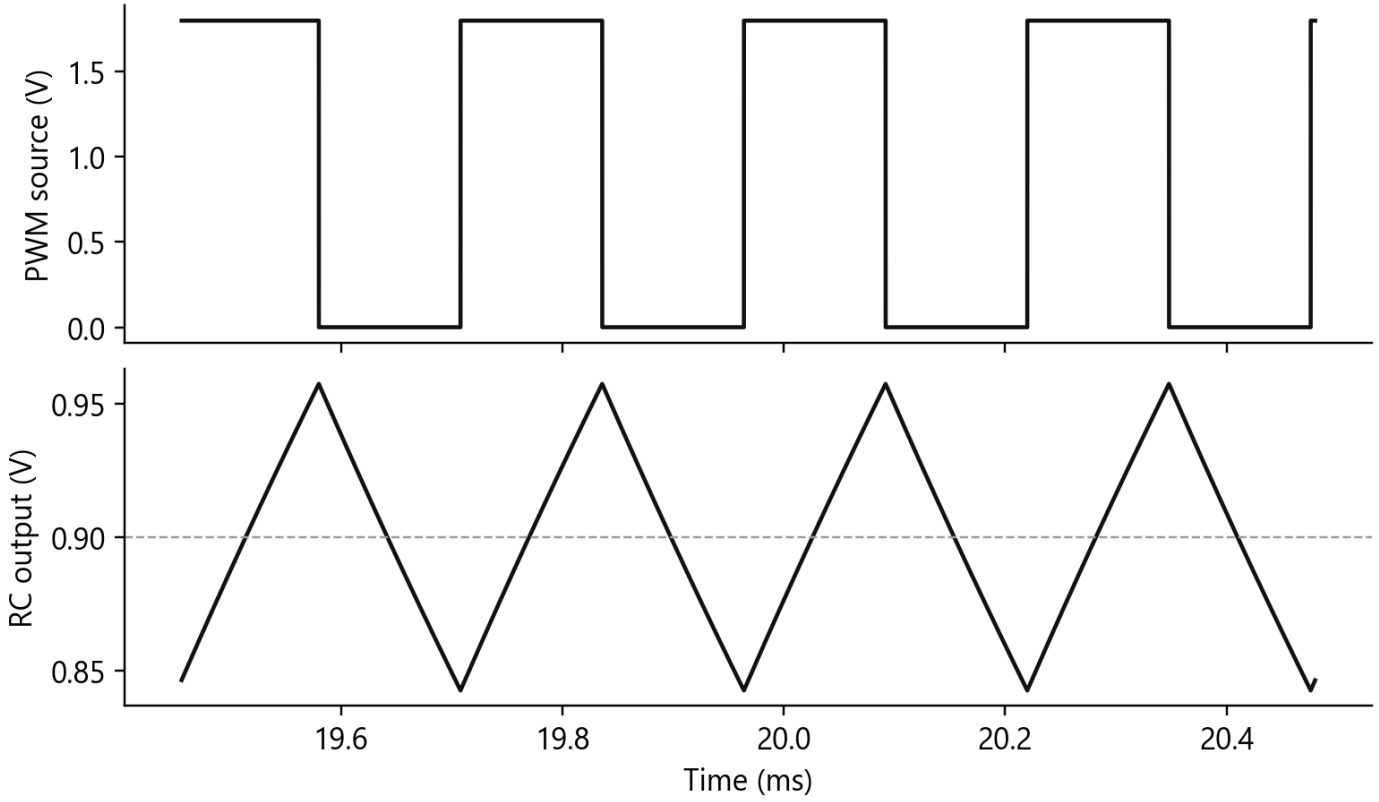

The measured settled ripple at 50% duty is **115.043 mV peak-to-peak**. The 25% and 75% cases each have about 86.3 mV peak-to-peak ripple under these ideal conditions.

The selected RC is a visible demonstration of averaging. A tighter ripple requirement would require a different filter or PWM rate and its own settling-time check.

SECTION 07

Verify the result and reject corrupt data

The checker examines **digital records, voltage sources, and analogue tables**. Each boundary needs its own check.

BOUNDARY	CHECKED OBSERVATION
RTL	All 80 periods per case have exact high counts
Bridge	Recorded levels and transitions are preserved
Analogue mean	Five targets each meet the 5 mV limit
Analogue shape	Exact RC solution agrees within 0.5 mV
Negative mapping	Half-amplitude bridge is rejected
Negative response	Flat output at midscale is rejected

```
APB_PWM_DIGITAL_PASS checks=102898
APB_PWM_BRIDGE_AND_RC_REFERENCE_VERIFIED
```

The analogue observer receives a deliberately flattened midscale output and rejects it. Every positive ngspice log must also show normal completion without a fatal or error line. No physical prototype is used.

SECTION 08

Reproduce, inspect, and extend

Run the simulator stages from the **AMS_PWM_RC workspace in WSL**. The scripts explicitly select the project environment.

```
igny init
igny workspace sync
igny tool install make --version 4.4.1 --env ams-pwm-rc
igny run --env ams-pwm-rc make setup
igny run --env ams-pwm-rc make run
```

The managed setup target installs pinned NumPy in an ignored project-local prefix. Supply FFTW through the loader or NGSPICE_RUNTIME_DIR. Runtime libraries are not copied from another demonstration. The run target checks the saved digital, bridge and analogue results.

LIMITS

The RC components and PWM voltage source are ideal. No transistor-level driver, source impedance, load current, resistor/capacitor tolerance, PVT, noise, feedback, APB latency, physical FPGA demonstration, or signoff claim is made. APB checks cover the declared local contract, not exhaustive protocol certification.

ngspice manual · independent sources and transient analysis
https://ngspice.sourceforge.io/docs/ngspice-manual.pdf

Arm · setup and access phase discussion
https://community.arm.com/forums/f/soc-design-and-simulation-forum/45648/question-related-to-phases-in-apb

Icarus Verilog documentation
https://steveicarus.github.io/iverilog/

Source, managed workflow and recorded evidence
https://github.com/CRUCIBLE-WORKBENCH/AMS_PWM_RC