




ALUMN. CHOD. PLATE FLOORING IN CAR - BY OWNER
THICKNESS OF FLOORING MUST NOT EXCEED 5mm.
WEIGHT OF FLOORING MUST NOT EXCEED 58kg.



NOTES:
(N1): WALL TYPE:
1.RCC/RCC-HIBLOCK/RCC-SBLOK/STRUCTURAL
2.FOR SILL AND HEADER MOUNTING RCC WALL MUST BE USED
(N2): DRAWING OFFICE TO REFER HOISTWAY TABLE AND SPECIFY THE
FLUID VALUES AT THE TIME OF PREPARING CONTRACT LAYOUTS



Graphic	Location
	LH installation
CC	Q 24
TC	Q3
HC	Q 3 & Q 4
RS	Q 4
LS	Q 2
CARGOV.	Q 1
CONTL LOC.	Q 3
PITLOC	Q 3


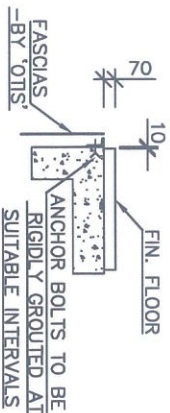


DETAIL 'X'
(AT ALL LANDINGS)




HAND OF INSTALLATION :- L.H

LIFT#:-L1

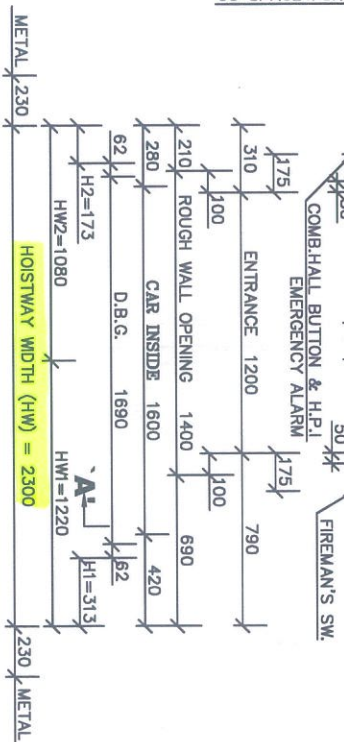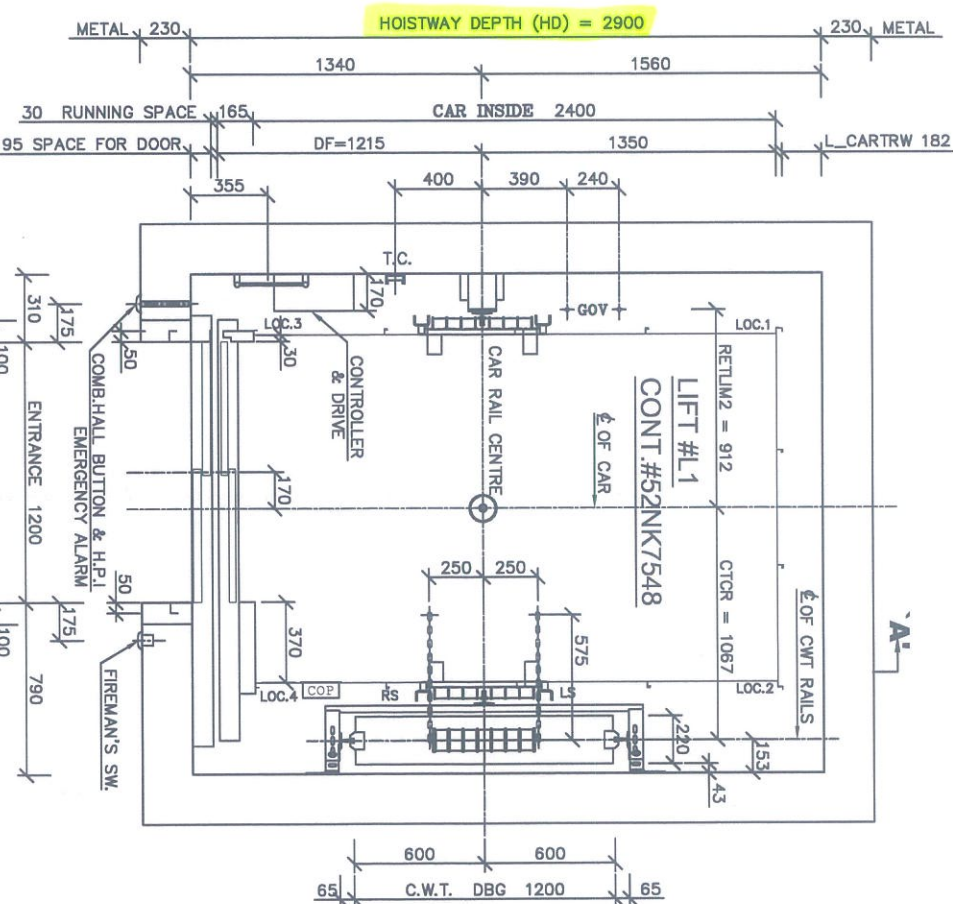

HOISTWAY PLAN
FRONT WALL AT 0° FLOOR
MUST NOT BE CONSTRUCTED UNTIL
'OTS' EQUIPMENT IS SET IN POSITION

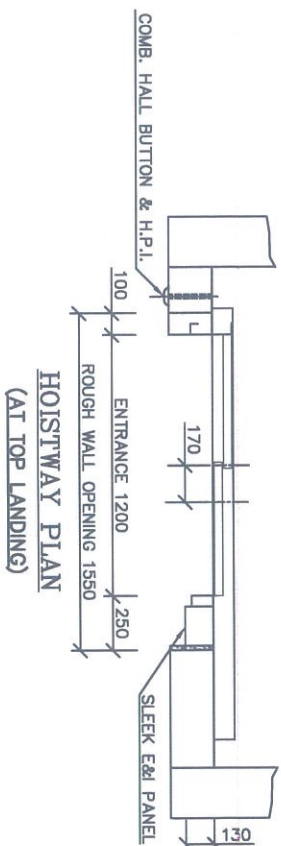

ONE(1) PASSENGER ELEVATOR, 5.0T (G.P.) MACHINE.(GEN2 STREAM MRL)

SIMPLEX FULL COLLECTIVE CONTROL WITH/W.O. ATTENDANT.		TYPE OF ELEVATOR
OPERATION	1768 Kg. Ⓢ	1.00 M.P.S.
	DUTY LOAD	SPEED

[illegible]