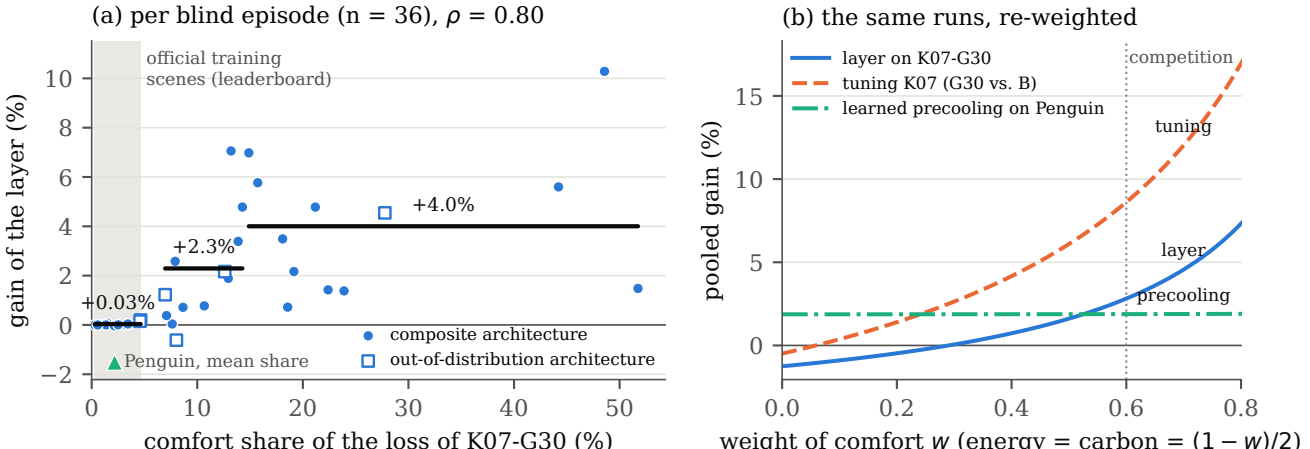
(a) per blind episode (n = 36), ρ = 0.80
official training
scenes (leaderboard)
gain of the layer (%)
comfort share of the loss of K07-G30 (%)
+0.03%
+2.3%
+4.0%
composite architecture
out-of-distribution architecture
Penguin, mean share
(b) the same runs, re-weighted
layer on K07-G30
tuning K07 (G30 vs. B)
learned precooling on Penguin
competition
tuning
layer
precooling
pooled gain (%)
weight of comfort w (energy = carbon = (1 − w)/2)