

SKI OPTION Sub-Section "G"



Side View

If you have chosen the Ski Option for your SkyStar product, you are in for a winter of good fun. These Skis are high quality fiberglass over steel frames. Installation is quick and straight forward and will be easy to do with these step by step instructions. The Skystar Ski kit comes with the cables pre-cut so the Ski will stay in the proper attitude both when flying and in the landing position.

Disassemble Brake system and remove Wheel and bearings. Leave the A/N 91020 bushing on the Axle. Add the large area AN960-10 Washer as shown in Fig. LG-G-1. When facing forward, the Skis have the Attach Brackets mounted on the inside stiffening rib of the Ski. When you are sure you have the right Ski on the right, and the left Ski on the left, bolt in place using the AN960-10 Castle Nut and Cotter Pin.



Front View

STEP 2: ATTACH CABLES


Attach the P/N 63031 Rear Cable to the aft Attach Bracket of the Ski with P/N 39012 Clevis. Use the same Clevis to attach the other end of the Cable to the Lift Strut Bracket. For the front Cable assembly, remove the front Landing Gear Pivot Bolt and install P/N 62021 Bracket on the right and P/N 63022 on the left. Re-install the nut and washers on the bolt and secure with a Cotter Key. Install front Cable, P/N 63030 to the front Brackets using two P/N 39012 clevis. See Fig. LG-G-2.


STEP 3: INSTALL BUNGEES

Attach one Bungee to front attachment and the other Bungee to the Cargo Pod mounting bracket in the rear as shown in Ski Cable Attach Fig. LG-G-2.

	SkyStar .	SkyStar Aircraft Corporation	oration	© 1992
ASSEMBLY	REVISION	DATE	SECTION	PAGE I.C.C.1
 Sub-Section "G" Ski Instructions		Sept 1, 1993 Landing Gear	Landing Gear	LG-G-1

MODEL 4-1200

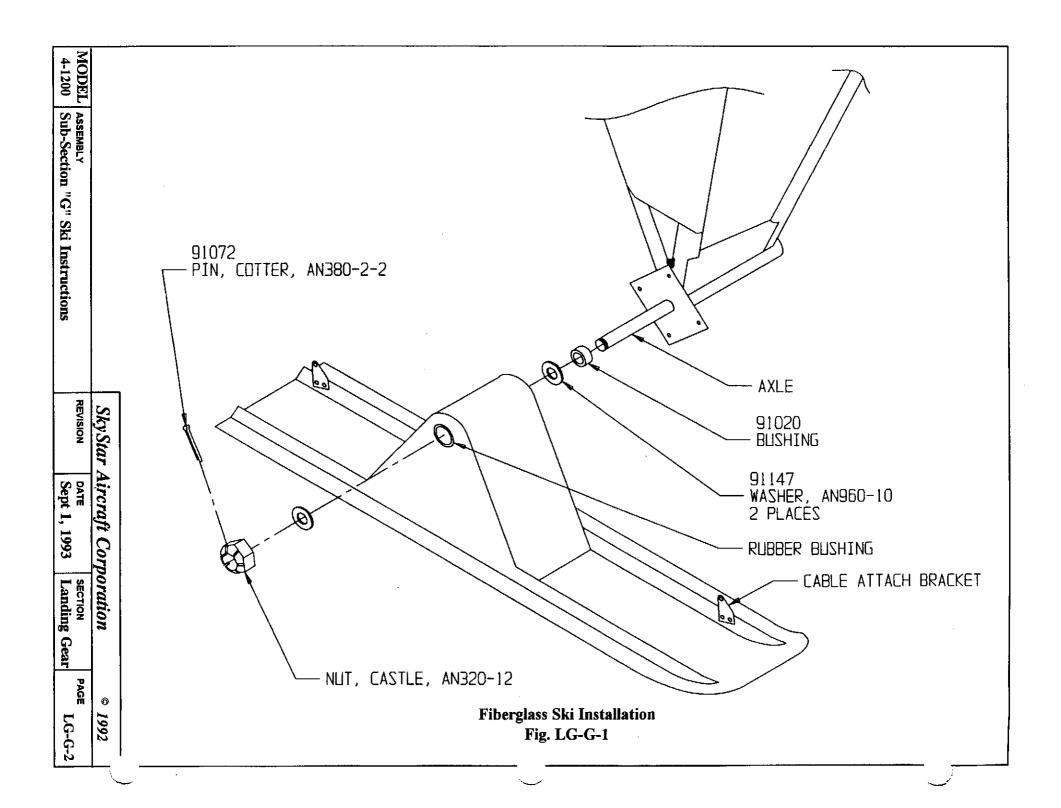

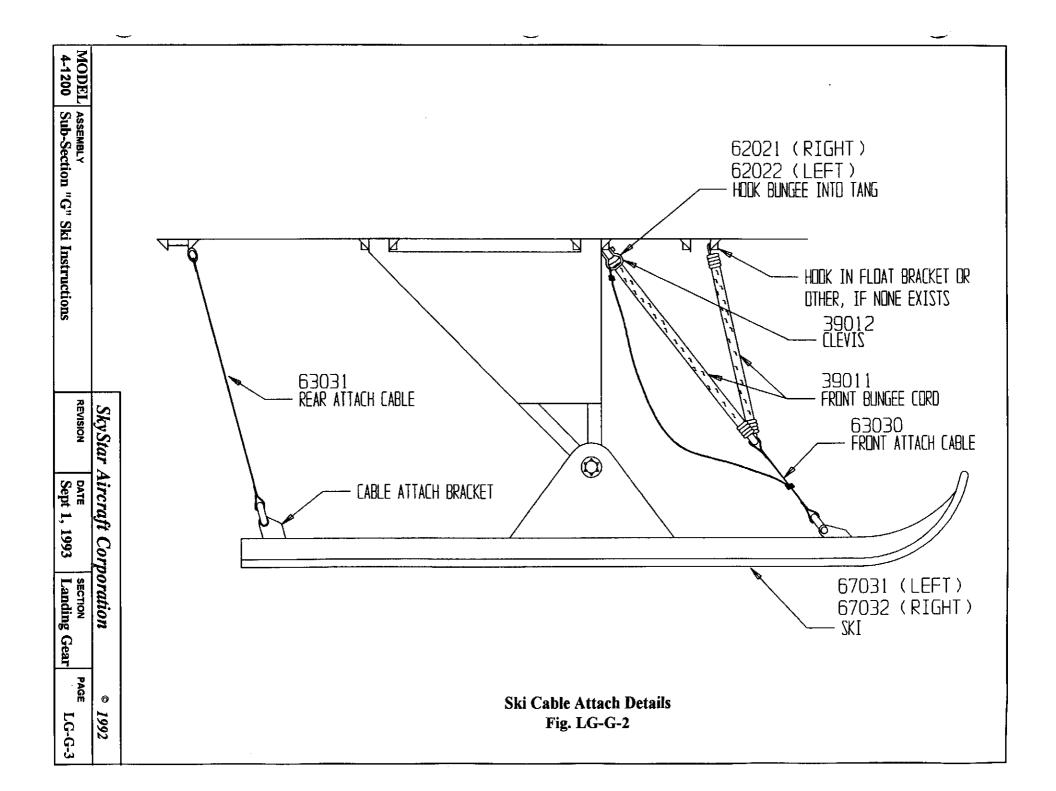

	·			
		<u>_</u> .		