

Notes



- **Assignments**

- ◆ 3.3
- ◆ 3.21
- ◆ 3.22 (a) -> Figs. (b) (d) (f)
- ◆ 3.24
- ◆ 3.25

- **Tutorial problems**

- ◆ Basic Problems with Answers 3.8
- ◆ Basic Problems 3.34
- ◆ Advanced Problems 3.40

Block diagram representation - CT

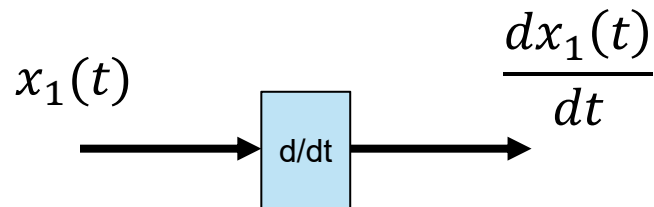
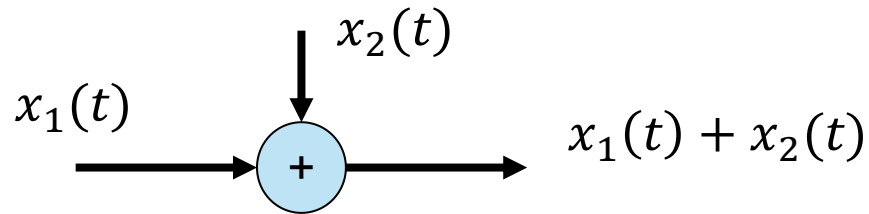


Problem 2.39

$$y(t) = -\frac{1}{2} \frac{dy(t)}{dt} + 4x(t)$$

$$\frac{dy(t)}{dt} + 3y(t) = x(t)$$

Block diagram representation - DT

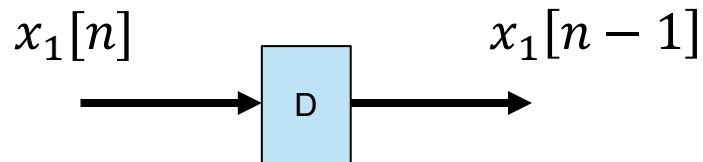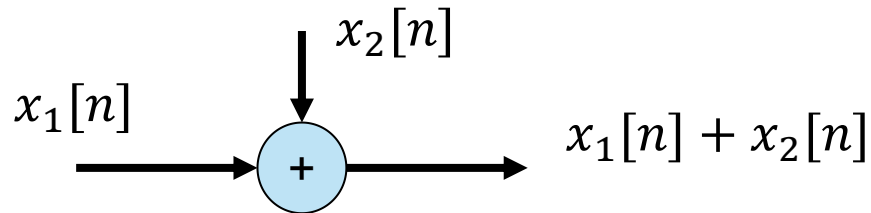


Problem 2.38

$$y[n] = \frac{1}{3} y[n-1] + \frac{1}{2} x[n]$$


$$y[n] = \frac{1}{3} y[n-1] + x[n-1]$$

From block diagram to difference equation

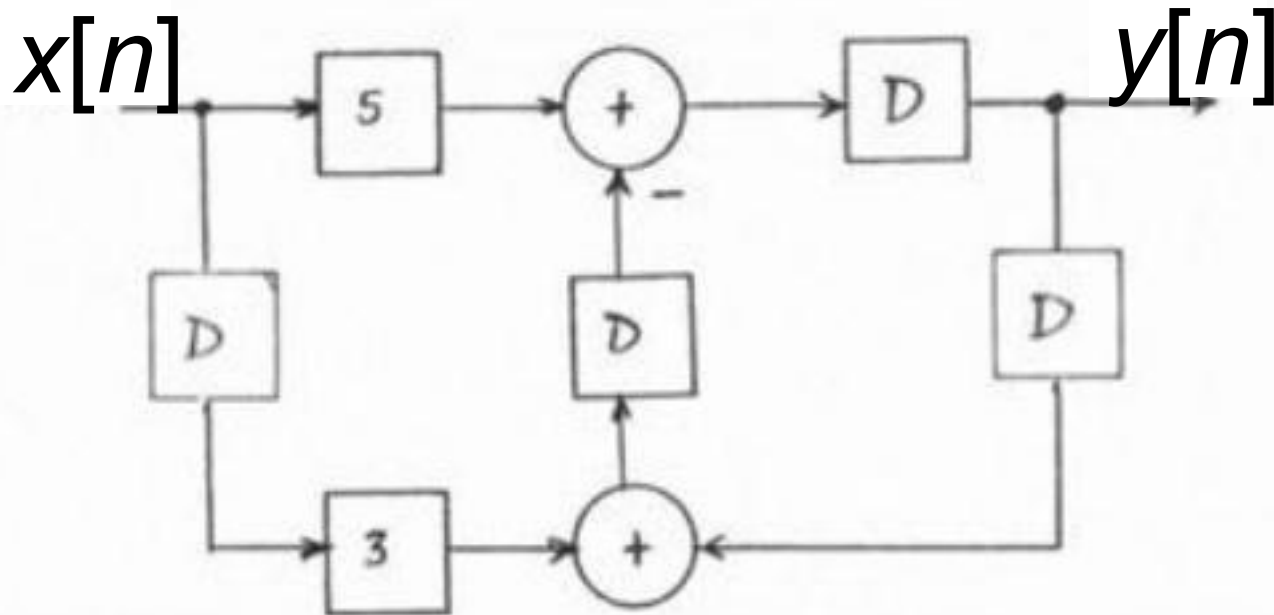

Review for Chapter 2

- Why to introduce unit impulse response?

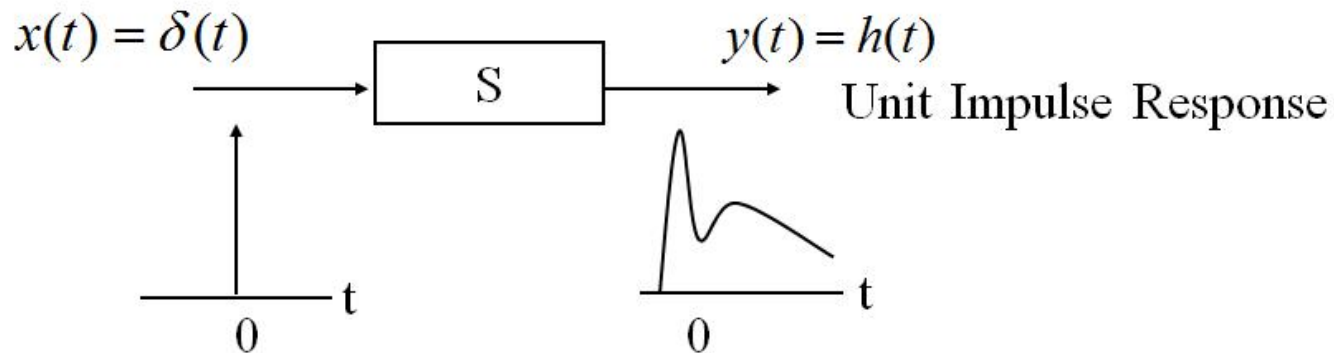


- Why to introduce convolution?
 - ◆ (DT or CT) Signal can be represented by a linear combination of **unit impulse function**
 - ◆ When it goes through the system, the output is computed via convolution of input signal and **unit impulse response**

Chapter 3


Fourier Series Representation of Periodic Signals

Fourier Series – A Time-Frequency Analysis Perspective

Joseph Fourier

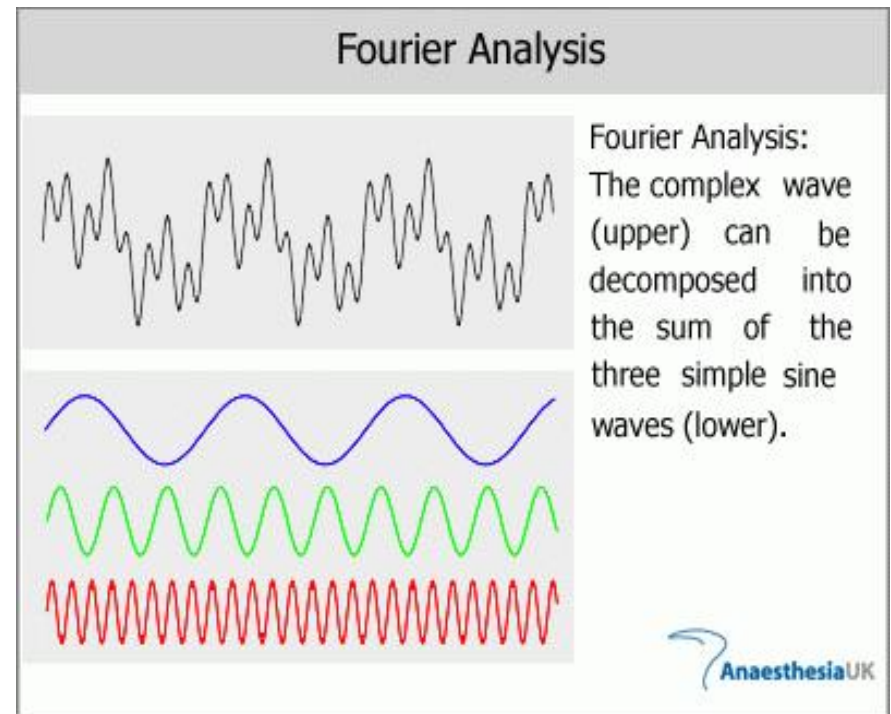


A Useful Analogy

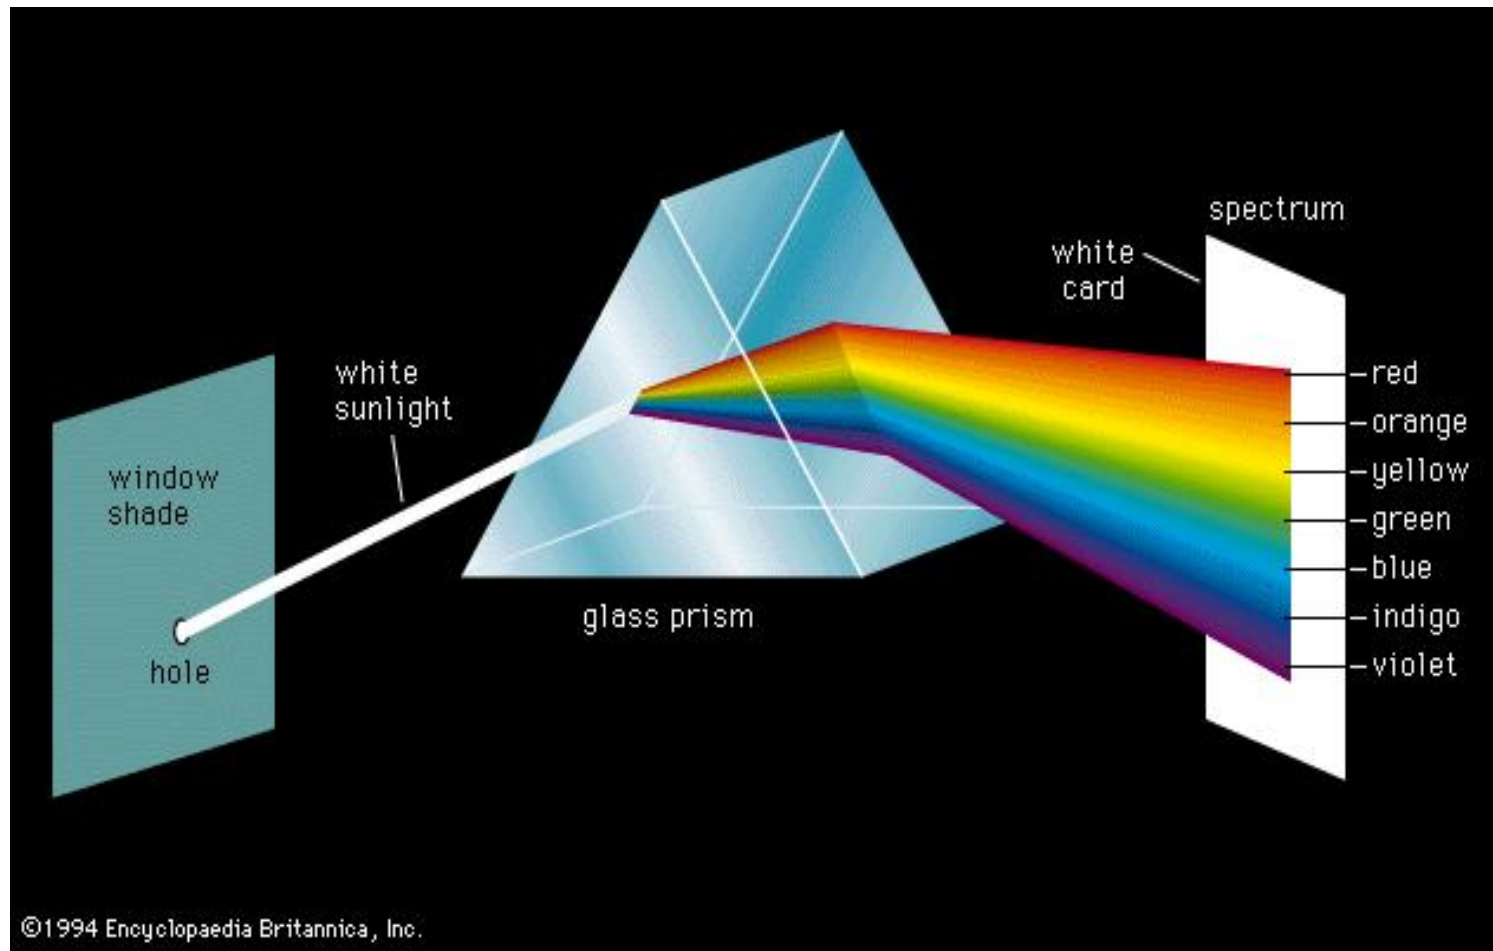

Note


Frequency and period are the inverse of each other.

$$f = \frac{1}{T} \quad \text{and} \quad T = \frac{1}{f}$$

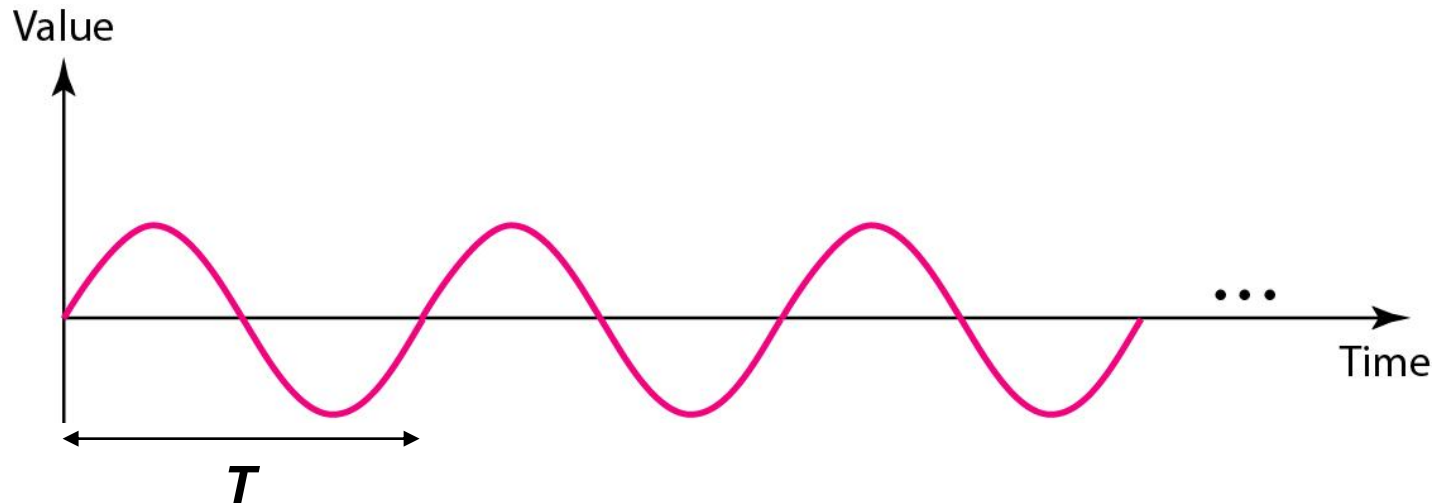


Example


Chart of the Electromagnetic Spectrum

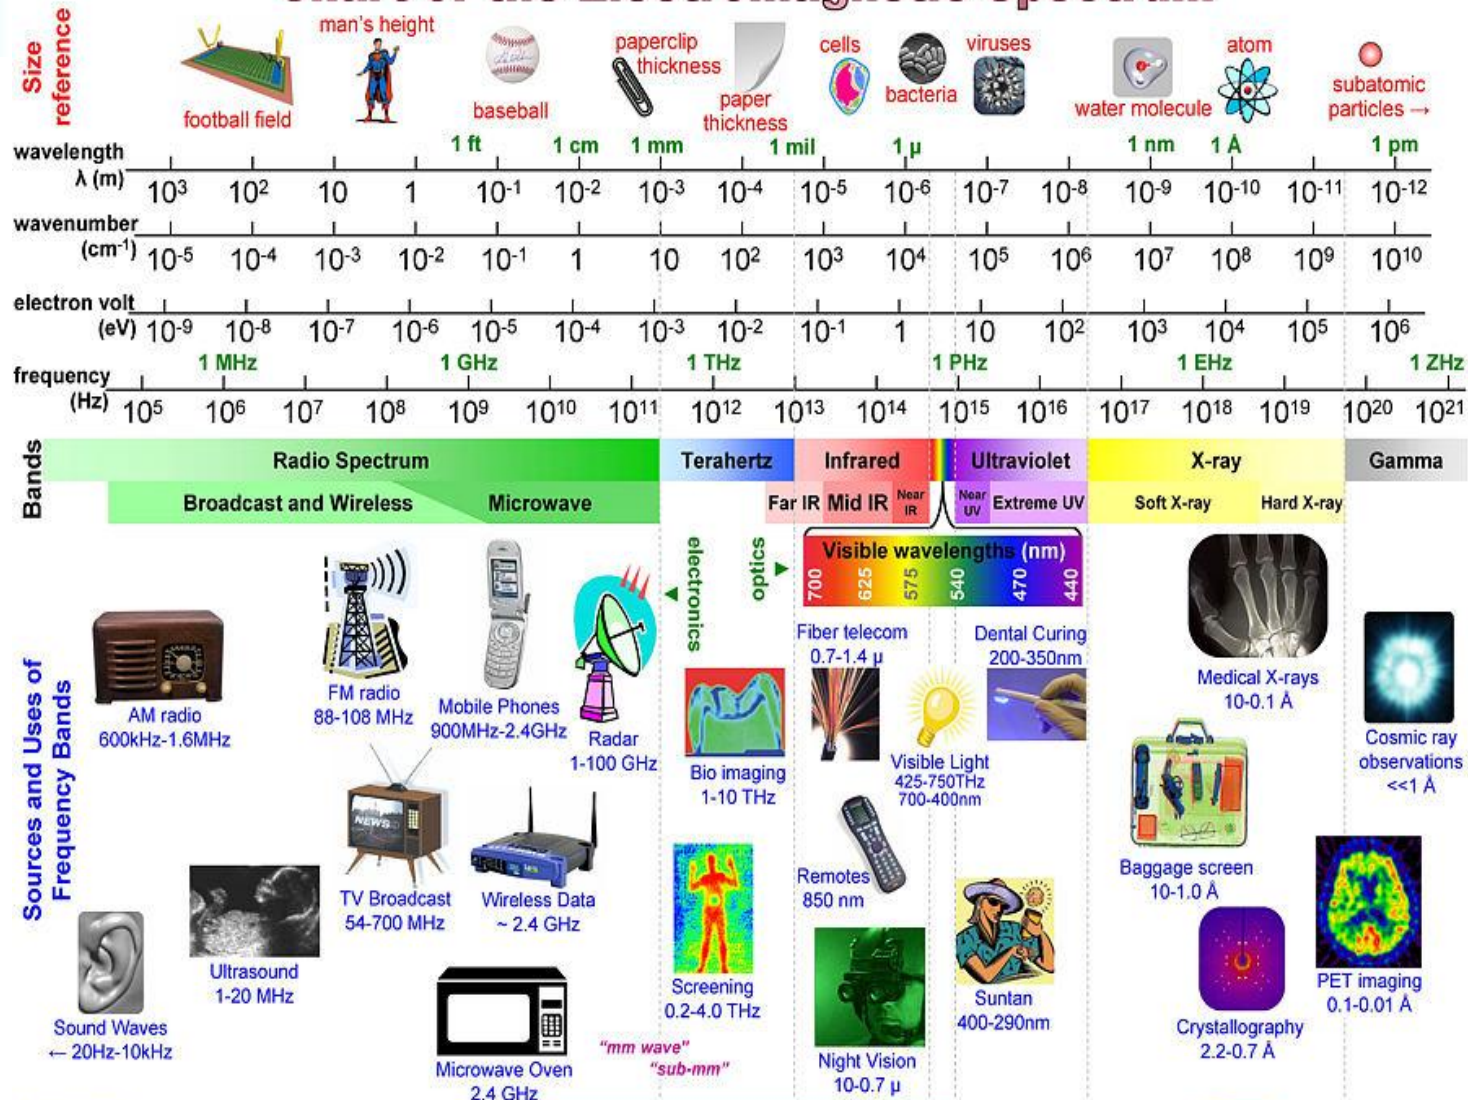

A complete sine wave in the time domain can be represented by one single spike in the frequency domain.

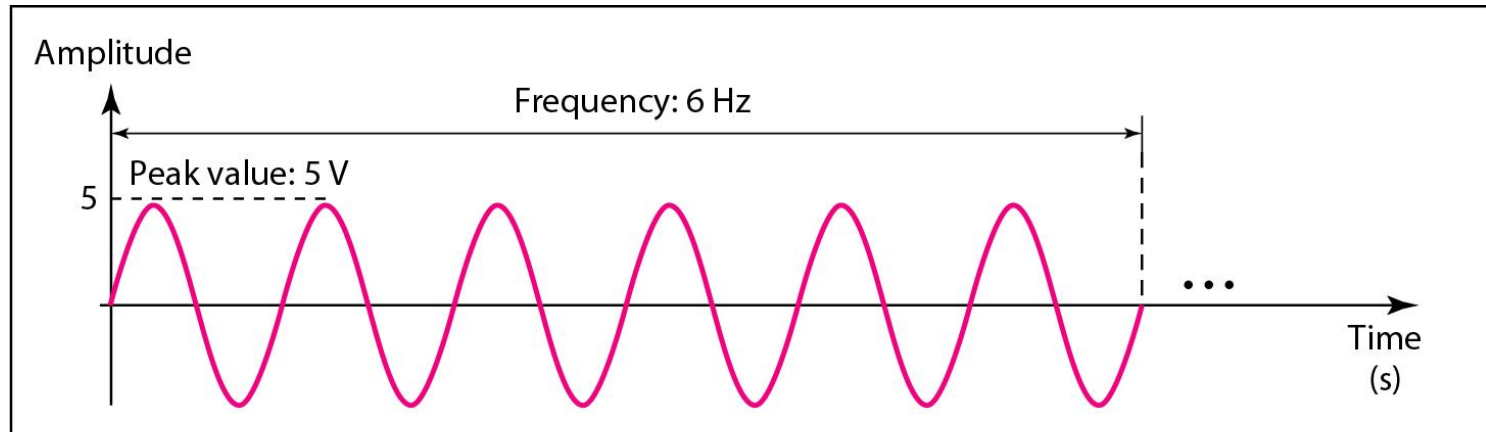

a. A sine wave in the time domain (peak value: 5 V, frequency: 6 Hz)

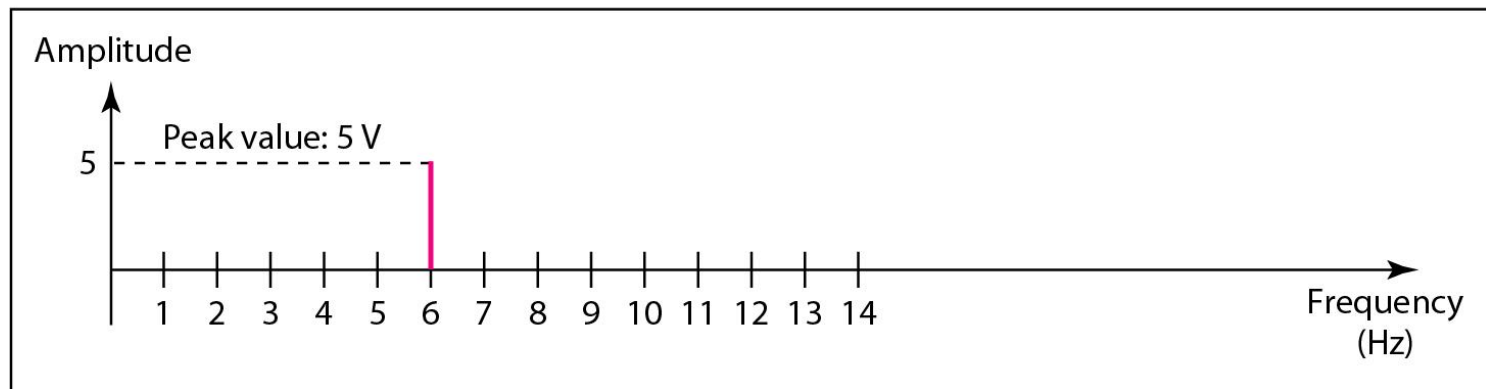


b. The same sine wave in the frequency domain (peak value: 5 V, frequency: 6 Hz)


Example

The frequency domain is more **compact** and **useful** when we are dealing with more than one sine wave.

The time domain and frequency domain of three sine waves

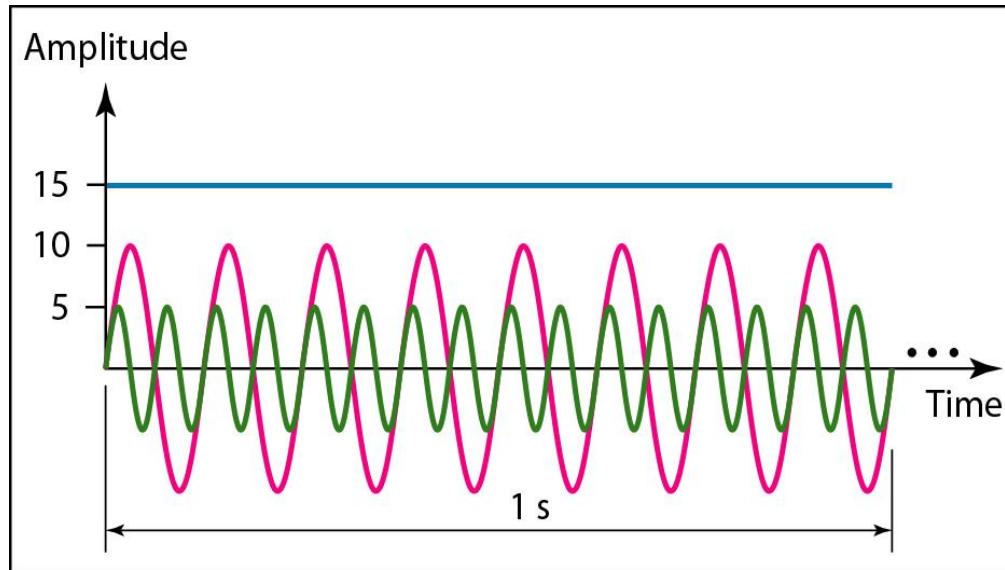


a. Time-domain representation of three sine waves with frequencies 0, 8, and 16

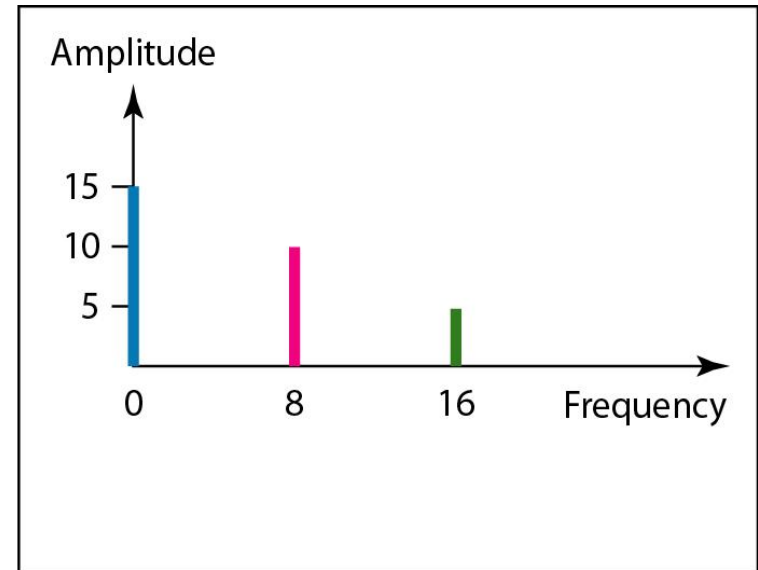


b. Frequency-domain representation of the same three signals


A composite periodic signal

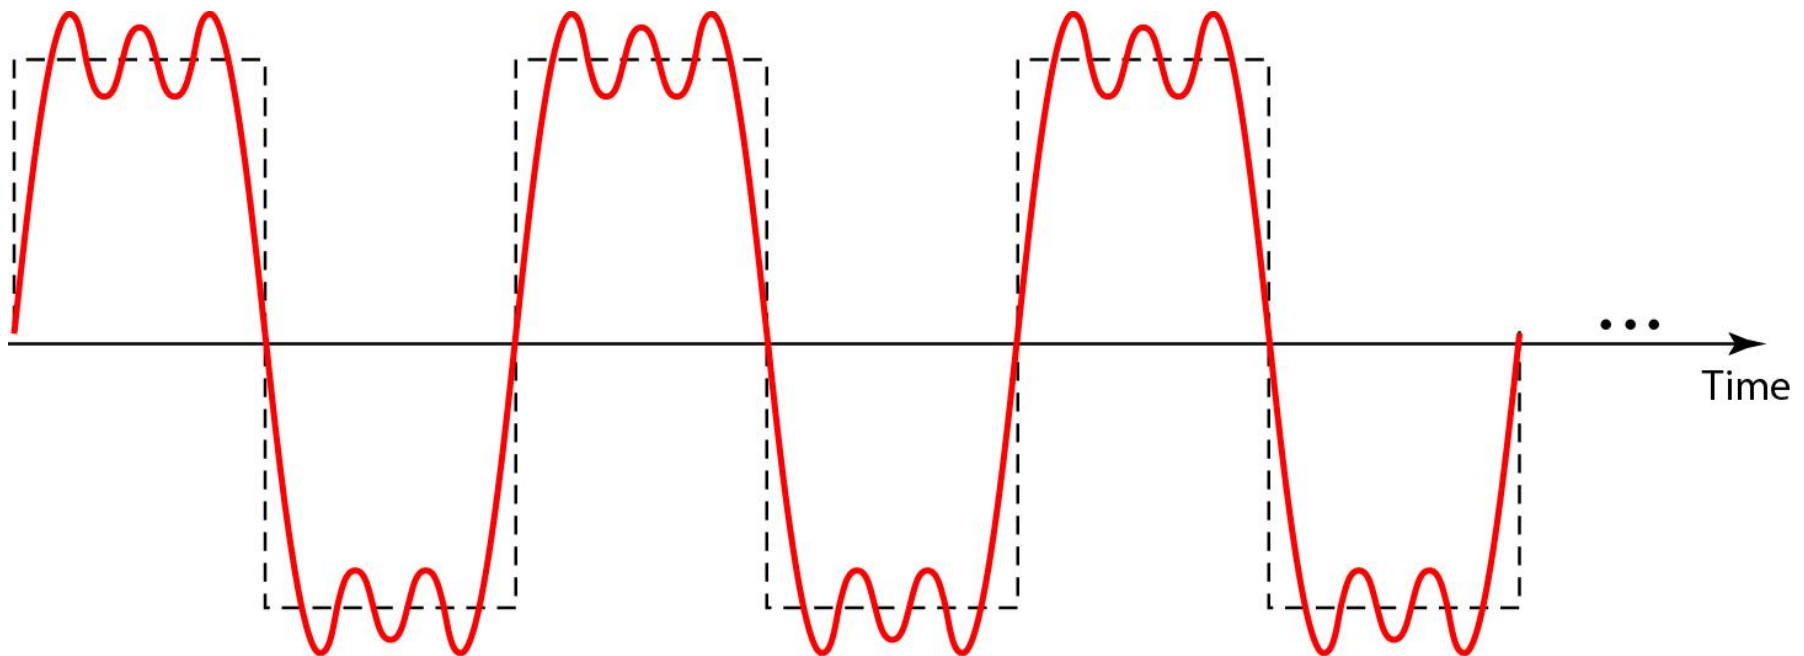

Decomposition of a composite periodic signal in the time and frequency domains

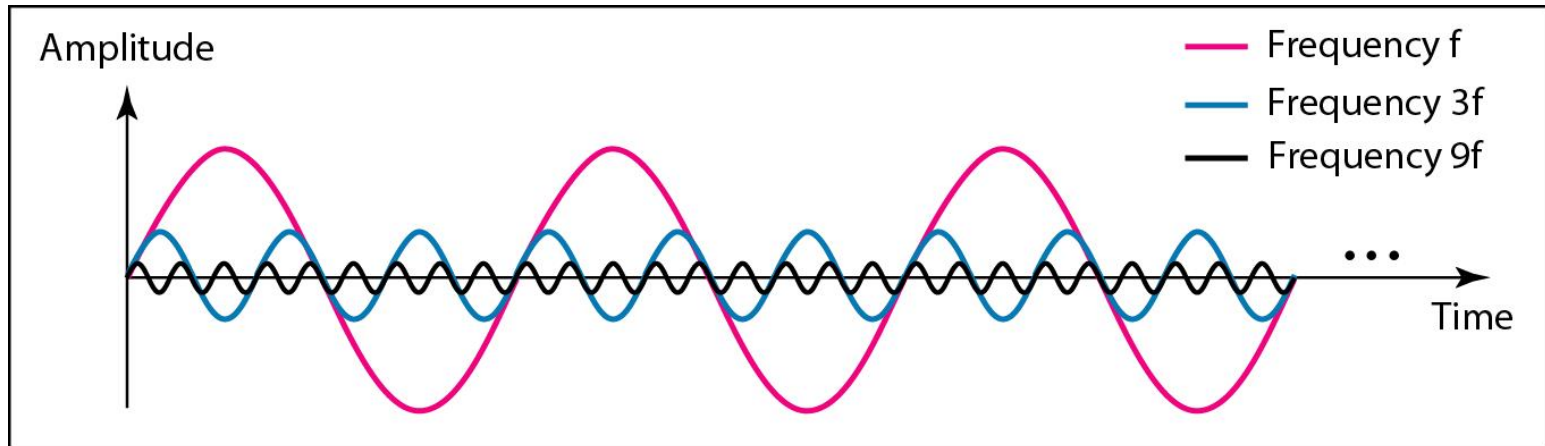


a. Time-domain decomposition of a composite signal

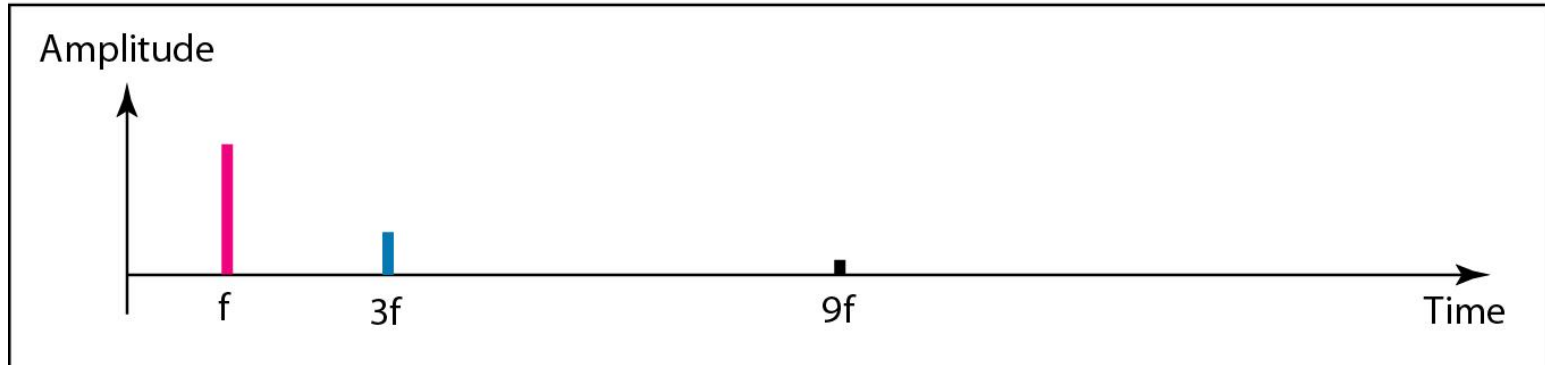


b. Frequency-domain decomposition of the composite signal

The time and frequency domains of an aperiodic signal

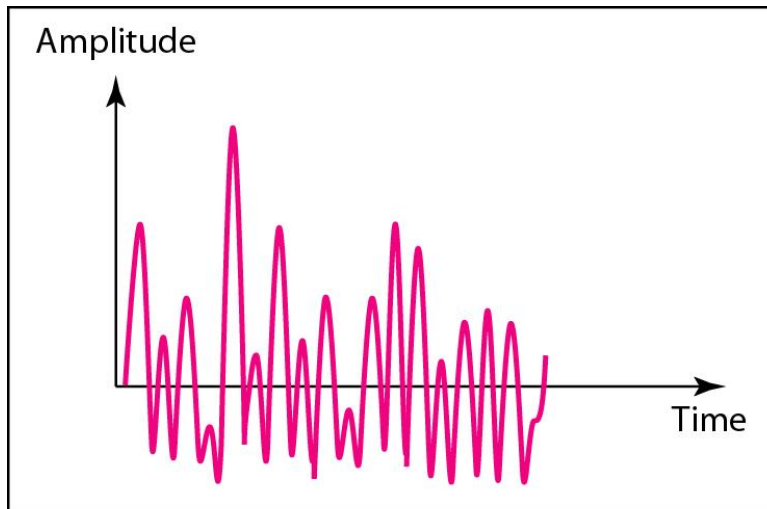

a. Time domain

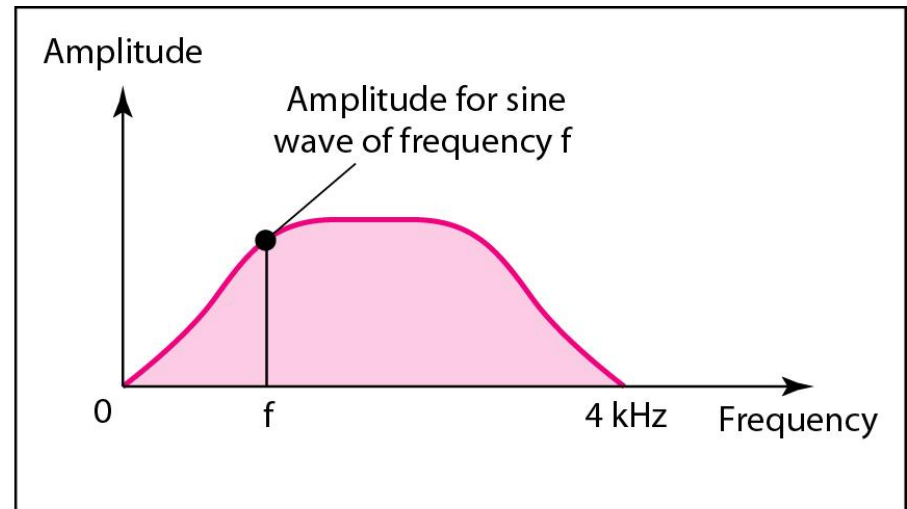

b. Frequency domain

What is the difference between periodic and aperiodic signals?


Composite Signals and Periodicity

- If the composite signal is **periodic**, the decomposition gives a series of signals with **discrete** frequencies.
- If the composite signal is **aperiodic**, the decomposition gives a combination of sine waves with **continuous** frequencies.

Fourier Analysis

Fourier analysis is a tool that changes a time domain signal to a frequency domain signal and vice versa.

Overview on Frequency Analysis

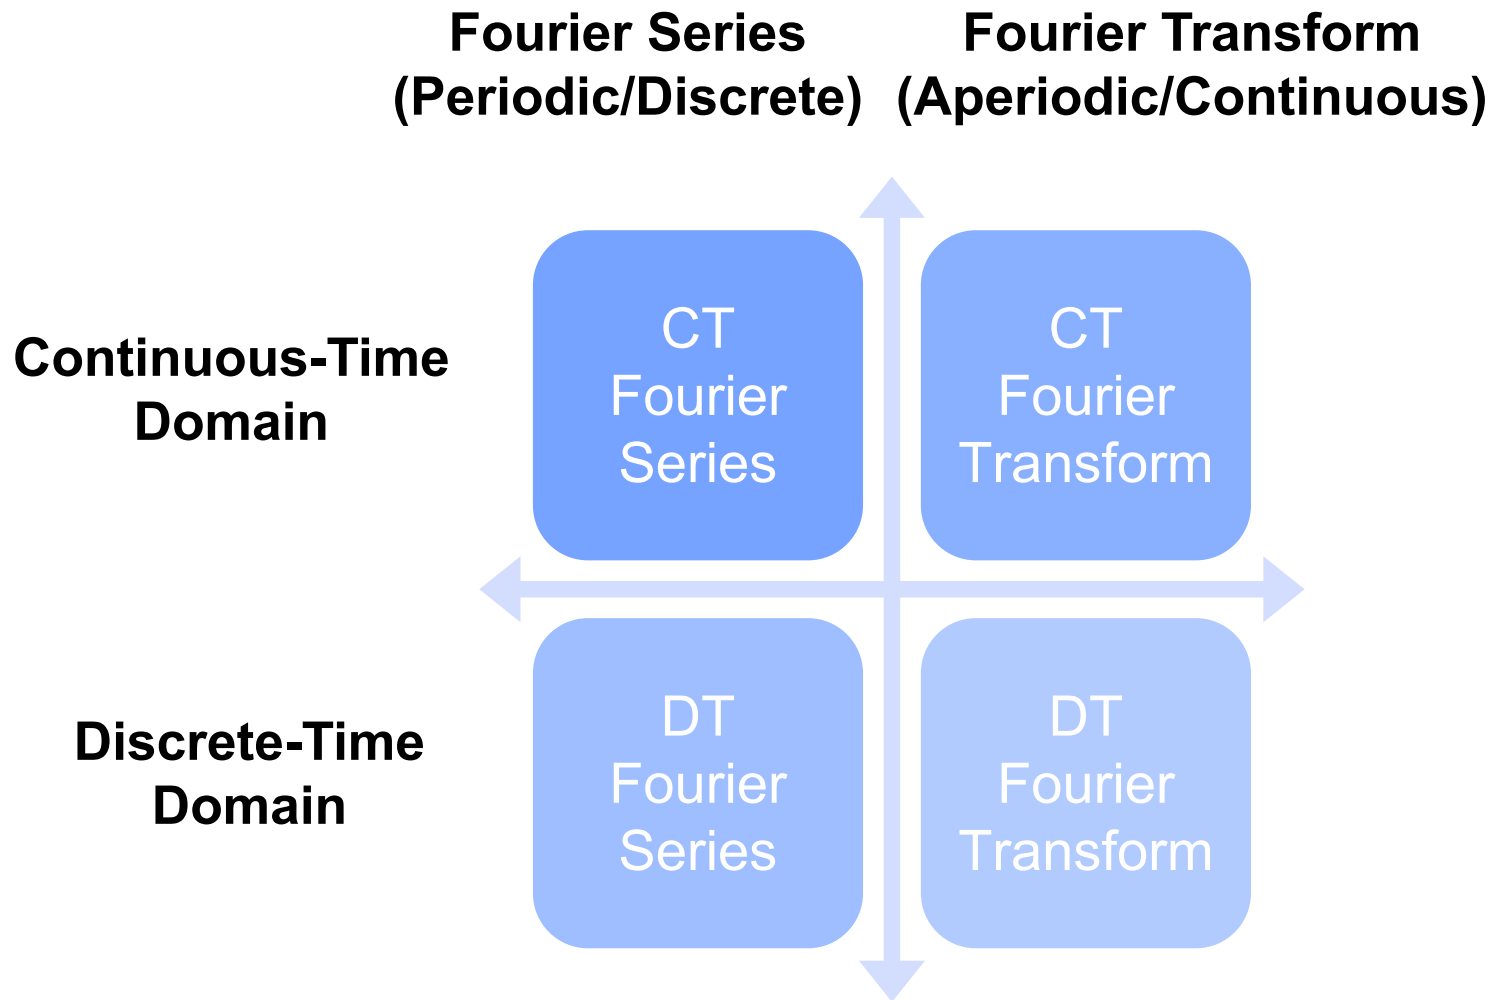

Fourier Series – An LTI System Analysis Perspective

How to represent signals in the study of LTI systems?


In chapter 2, based on **unit impulse function** and superposition property, we have:

- 1) The set of basic signals can be used to construct a **broad** and useful class of signals.
- 2) The response of an LTI system to each signal should be **simple** enough in structure, to provide us with a convenient representation for the response of the system to any signal constructed as **a linear combination of the basic signals**.

Any more basic function?

Eigenfunctions $\phi_k(t)$ and Their Properties

➔ (Focus on CT systems now, but results apply to DT systems as well.)

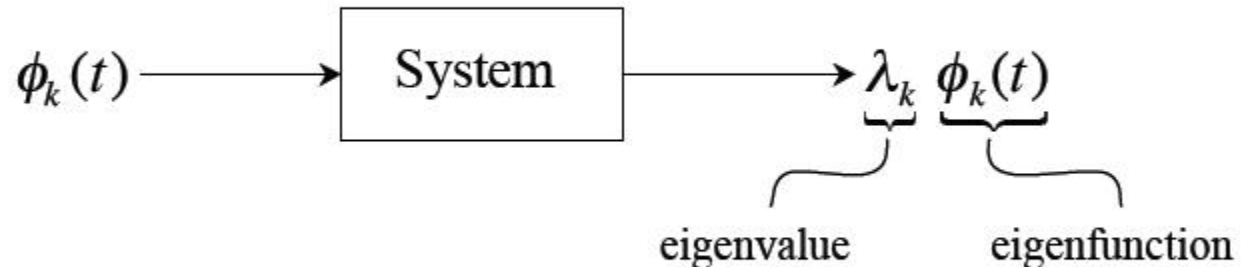

Eigenfunction in $\rightarrow$ same function out with a “gain”

➔ From the superposition property of LTI systems:

$$x(t) = \sum_k a_k \phi_k(t) \longrightarrow \boxed{\text{LTI}} \longrightarrow y(t) = \sum_k \lambda_k a_k \phi_k(t)$$


Now the task of finding response of LTI systems is to determine λ_k .
The solution is simple, general, and insightful.

Two Key Questions

1. **What are** the eigenfunctions of a general LTI system?
2. **What kinds** of signals can be expressed as superpositions of these eigenfunctions?


Various Eigenfunctions

Ex. #1: Identity system

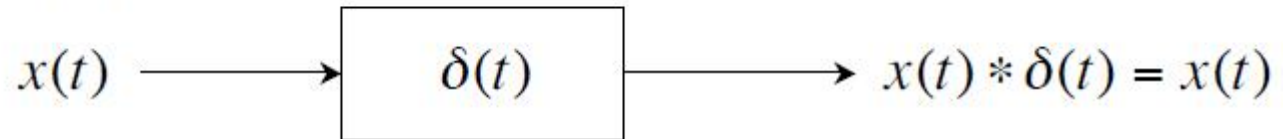


Any function is an eigenfunction for this LTI system.

Ex. #2: A delay

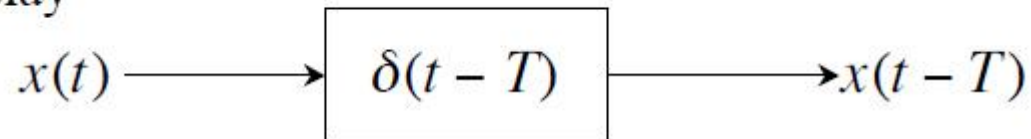


Any periodic function $x(t) = x(t+T)$ is an eigenfunction.

Ex. #3: $h(t)$ even

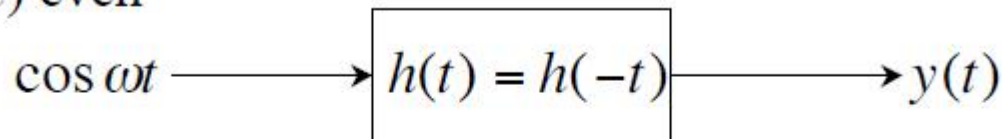


$$\begin{aligned}
 y(t) &= \int_{-\infty}^{\infty} h(\tau) \cos[\omega(t - \tau)] d\tau = \int_{-\infty}^{\infty} h(\tau) [\cos \omega t \cdot \cos \omega \tau + \sin \omega t \cdot \sin \omega \tau] d\tau \\
 &= \cos \omega t \underbrace{\int_{-\infty}^{\infty} h(\tau) \cos \omega \tau d\tau}_{H(j\omega)} \quad - \cos \omega t \text{ is an eigenfunction}
 \end{aligned}$$

Complex Exponentials - The *Only* Eigenfunctions of *Any* LTI Systems

 $x(t) = e^{st}$



$$y(t) = x(t) * h(t) = h(t) * x(t) = \int_{-\infty}^{\infty} h(\tau) x(t - \tau) d\tau$$

$$\begin{aligned}
 y(t) &= \int_{-\infty}^{+\infty} h(\tau) e^{s(t-\tau)} d\tau \\
 &= \left[\int_{-\infty}^{+\infty} h(\tau) e^{-s\tau} d\tau \right] e^{st} \\
 &= \underbrace{H(s)}_{\text{eigenvalue}} \underbrace{e^{st}}_{\text{eigenfunction}}
 \end{aligned}$$

 $x[n] = z^n$



$$y[n] = \sum_{m=-\infty}^{\infty} h[m] z^{n-m}$$


$$= \left[\sum_{m=-\infty}^{\infty} h[m] z^{-m} \right] z^n$$

$$= \underbrace{H(z)}_{\text{eigenvalue}} \underbrace{z^n}_{\text{eigenfunction}}$$

$$\begin{aligned}
 y[n] &= \sum_{m=-\infty}^{\infty} h[m] z^{n-m} \\
 &= \left[\sum_{m=-\infty}^{\infty} h[m] z^{-m} \right] z^n \\
 &= \underbrace{H(z)}_{\text{eigenvalue}} \underbrace{z^n}_{\text{eigenfunction}}
 \end{aligned}$$

System Functions $H(s)$ or $H(z)$


→ **CT:**

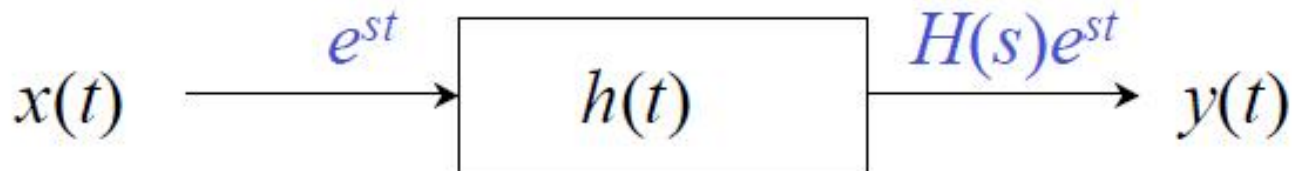

$$H(s) = \int_{-\infty}^{\infty} h(t)e^{-st} dt$$

$$x(t) = \sum a_k e^{s_k t} \longrightarrow y(t) = \sum H(s_k) a_k e^{s_k t}$$

→ **DT:**

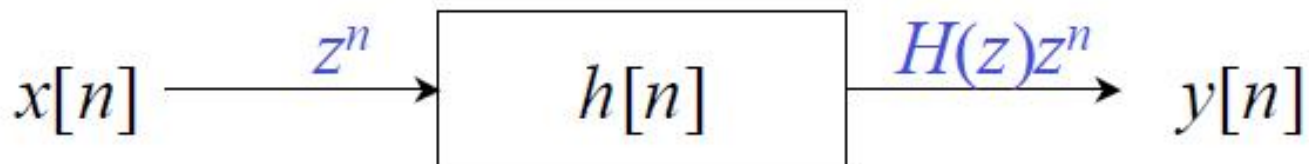

$$H(z) = \sum_{n=-\infty}^{\infty} h[n]z^{-n}$$

$$x[n] = \sum a_k z_k^n \longrightarrow y[n] = \sum H(z_k) a_k z_k^n$$

Question 2: What kinds of signals can we represent as “sums” of complex exponentials?

For Now: Focus on restricted sets of complex exponentials

- ➔ CT: $s = j\omega$ - purely imaginary ,
i.e. signals of the form $e^{j\omega t}$
- ➔ DT: $z = e^{j\omega}$, i.e. signals of the form $e^{j\omega n}$



CT & DT Fourier Series and Transforms
periodic **aperiodic**

Question: How do we find the Fourier coefficients?

Let's first take a detour by studying a three-dimensional vector:

$$\vec{A} = A_x \hat{x} + A_y \hat{y} + A_z \hat{z},$$

$\hat{x}, \hat{y}$, and $\hat{z}$ are unit vectors.

How do we find the coefficients A_x , A_y , and A_z ?


Easy, $A_x = \vec{A} \cdot \hat{x}$, $A_y = \vec{A} \cdot \hat{y}$, and $A_z = \vec{A} \cdot \hat{z}$.

Project the vector onto the x -, y -, and z -axis.

Why does it work this way?

Orthogonality:

$$\hat{y} \cdot \hat{x} = \hat{z} \cdot \hat{y} = \hat{x} \cdot \hat{z} \equiv 0$$

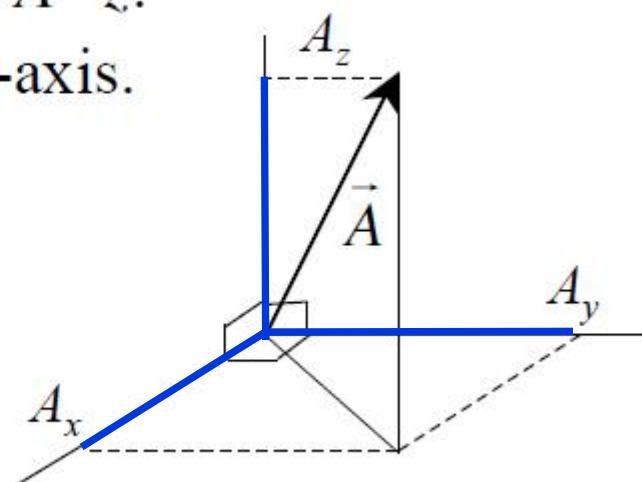

Back to Fourier Series

Now let's imagine that $x(t)$ is a vector in a space of ∞ -dimensions and $e^{jk\omega_o t}$ ($k = 0, \pm 1, \pm 2, \dots$) is a unit vector in this space. (Such a space does exist, it is called **Hilbert** space, just nobody lives there.) Then,

$$x(t) = \sum_{k=-\infty}^{+\infty} a_k e^{jk\omega_o t}, \quad \text{with the analogy}$$

$$\begin{aligned} x(t) &\leftrightarrow \vec{A} \\ e^{jk\omega_o t} &\leftrightarrow \hat{x}, \hat{y}, \hat{z} \\ a_k &\leftrightarrow A_x, A_y, A_z \end{aligned}$$

Now all we need to do is to “project” $x(t)$ onto the $e^{jk\omega_o t}$ - axis, then we will obtain the coefficients a_k . How to do that? Again, need **orthogonality**.

Inner Product of Exponential Signals

- Define inner product as

$$\langle e^{jk\omega_0 t} \cdot e^{jn\omega_0 t} \rangle = \frac{1}{T} \int_T e^{jk\omega_0 t} (e^{jn\omega_0 t})^* dt$$

- We have

$$\langle e^{jk\omega_0 t} \cdot e^{jn\omega_0 t} \rangle = 1 \quad (k = n)$$

$$\langle e^{jk\omega_0 t} \cdot e^{jn\omega_0 t} \rangle = 0 \quad (k \neq n)$$

- $\{e^{jk\omega_0 t} | \forall \text{ integer } k\}$ is the basis of periodic signal space with period T

How to Obtain Fourier Coefficients

- $x(t) = \sum_{k=-\infty}^{+\infty} a_k e^{jk\omega_0 t} \Rightarrow \vec{A} = A_x \hat{x} + A_y \hat{y} + A_z \hat{z}$

- Notice

$$A_x = \vec{A} \cdot \hat{x}$$

- Similarly, we guess

$$a_k = \langle x(t) \cdot e^{jk\omega_0 t} \rangle$$

Let's double-check

$$\begin{aligned} & \langle x(t) \cdot e^{jk\omega_0 t} \rangle \\ &= \sum_{n=-\infty}^{+\infty} a_n \langle e^{jn\omega_0 t} \cdot e^{jk\omega_0 t} \rangle \\ &= a_k \end{aligned}$$



Important

Finally...

$$\frac{1}{T} \int_T x(t) \cdot e^{-jn\omega_o t} dt = a_n.$$



CT Fourier Series Pair

$$(\omega_o = 2\pi / T)$$


$$x(t) = \sum_{k=-\infty}^{+\infty} a_k e^{jk\omega_o t}$$

(Synthesis equation)

$$a_k = \frac{1}{T} \int_T x(t) e^{-jk\omega_o t} dt$$

(Analysis equation)


Example 3.5: Periodic Square Wave

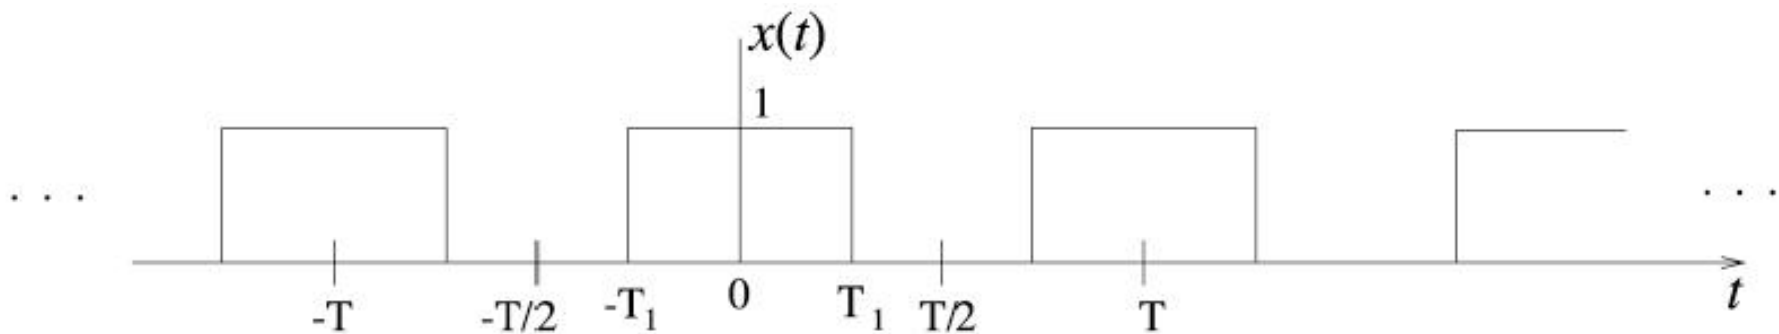

$$a_o = \frac{1}{T} \int_{-T/2}^{T/2} x(t) dt = \frac{2T_1}{T}$$

$$k \neq 0 \quad a_k = \frac{1}{T} \int_{-T/2}^{T/2} x(t) e^{-jk\omega_0 t} dt = \frac{1}{T} \int_{-T_1}^{T_1} e^{-jk\omega_0 t} dt$$

$$(\omega_o = \frac{2\pi}{T}): \quad = -\frac{1}{jk\omega_o T} e^{-jk\omega_0 t} \Big|_{-T_1}^{T_1} = \frac{\sin(k\omega_o T_1)}{k\pi}$$

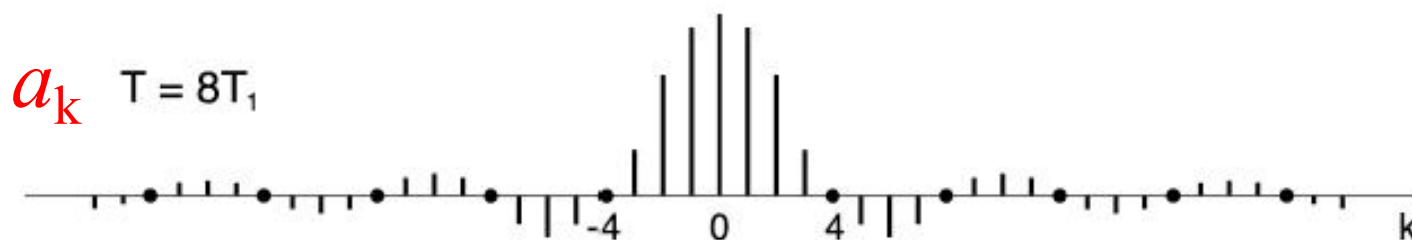

Example: Synthesis


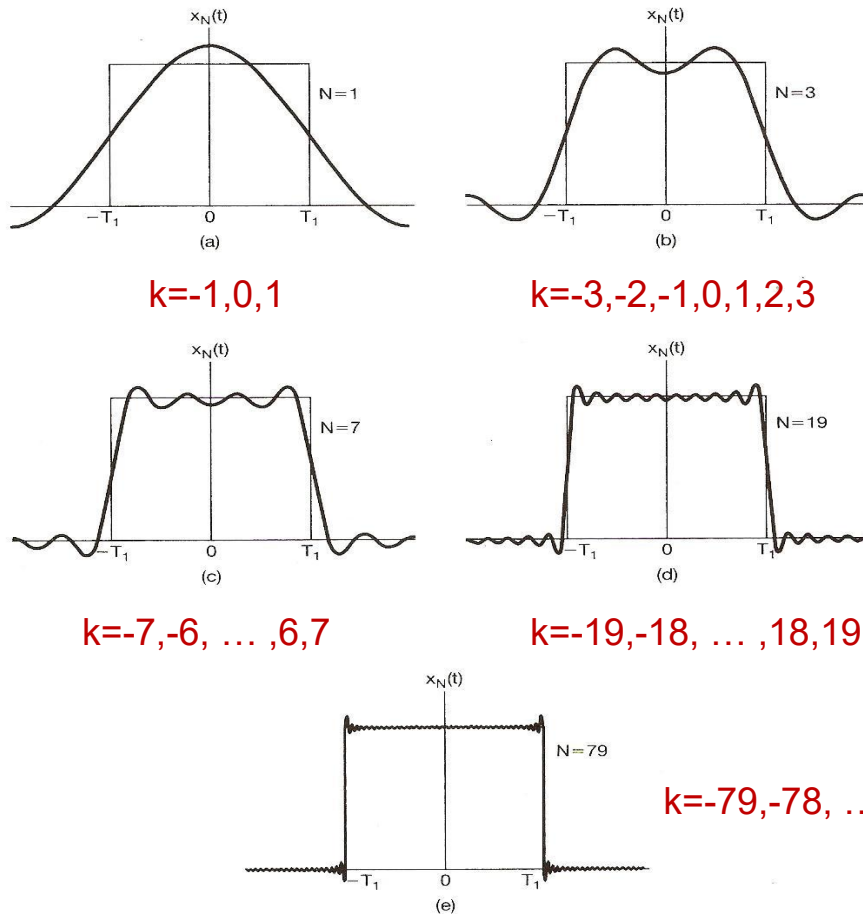


Figure 3.9 Convergence of the Fourier series representation of a square wave: an illustration of the Gibbs phenomenon. Here, we have depicted the finite series approximation $x_N(t) = \sum_{k=-N}^N a_k e^{jk\omega_0 t}$ for several values of N .

- **Gibbs Phenomenon:** the partial sum in the vicinity of the discontinuity exhibits ripples whose amplitude does not seem to decrease with increasing N

Periodic Impulse Train

$$x(t) = \sum_{n=-\infty}^{\infty} \delta(t - nT) \quad \text{— Sampling function, important for sampling later}$$

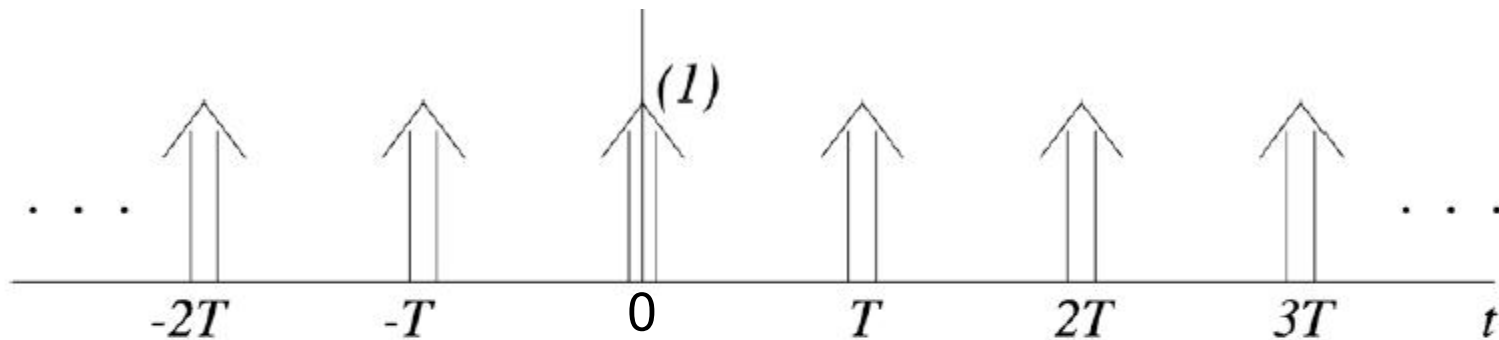

$$\begin{aligned} a_k &= \frac{1}{T} \int_{-T/2}^{T/2} x(t) e^{-jk\omega_0 t} dt = \frac{1}{T} \int_{-T/2}^{T/2} \delta(t) e^{-jk\omega_0 t} dt \\ &= \frac{1}{T} \quad \text{for all } k! \end{aligned}$$

⇓

$$x(t) = \frac{1}{T} \sum_{k=-\infty}^{+\infty} e^{jk\omega_0 t}$$

— All components have:
 (1) the same amplitude,
 &
 (2) the same initial phase.

Convergence of CT Fourier Series

What kind of periodic signals have Fourier series expansion?

Define $e(t) = x(t) - \sum_{k=-\infty}^{+\infty} a_k e^{jk\omega_0 t}$,

- Fourier series expansion exists $\Leftrightarrow \exists \{a_k\}, e(t) = 0$ (D1)

Relaxation:

- Fourier series expansion exists $\Leftrightarrow \exists \{a_k\}, \int_T |e(t)|^2 dt = 0$ (D2)
- $D1 \subset D2$
- Two sufficient conditions for D2
 - $\int_T |x(t)|^2 dt < \infty$
 - Dirichlet condition

Dirichlet Conditions


Condition 1. $x(t)$ is *absolutely integrable* over one period, i. e.

$$\int_T |x(t)| dt < \infty$$

Condition 2. In a finite time interval, $x(t)$ has a *finite* number of maxima and minima.


Ex. An example that violates Condition 2.

$$x(t) = \sin(2\pi/t) \quad 0 < t \leq 1$$

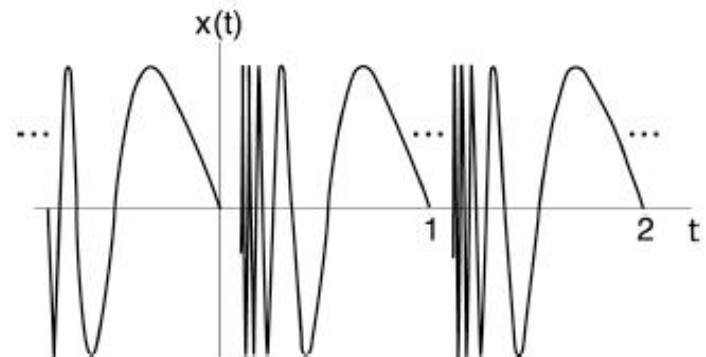

Condition 3. In a finite time interval, $x(t)$ has only a *finite* number of discontinuities.

Ex. An example that violates Condition 3.

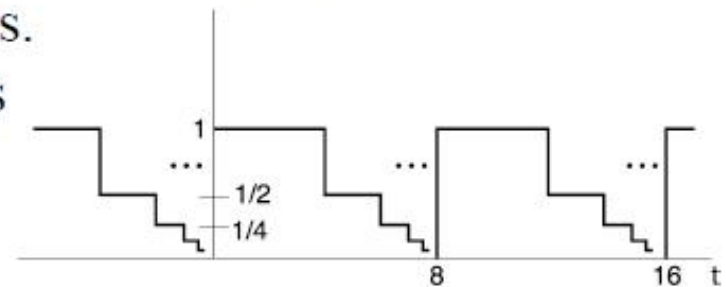

CT Fourier Series Pairs

$$(\omega_o = \frac{2\pi}{T})$$

Review:

$$x(t) = \sum_{k=-\infty}^{+\infty} a_k e^{jk\omega_o t} = \sum_{k=-\infty}^{+\infty} a_k e^{j2\pi kt/T}$$

$$a_k = \frac{1}{T} \int_T x(t) e^{-jk\omega_o t} dt$$

$$x(t) \longleftrightarrow a_k$$

Skip it in future
for shorthand

(A Few) Properties of CT Fourier Series

- Linearity $x(t) \longleftrightarrow a_k, y(t) \longleftrightarrow b_k \Rightarrow \alpha x(t) + \beta y(t) \longleftrightarrow \alpha a_k + \beta b_k$
- Conjugate Symmetry

$$x(t) \text{ real} \Rightarrow a_{-k} = a_k^*$$

Proof:

$$a_{-k} = \frac{1}{T} \int_T x(t) e^{jk\omega_o t} dt = \left[\frac{1}{T} \int_T x^*(t) e^{-jk\omega_o t} dt \right]^* = a_k^*$$

$$\Downarrow a_k = \operatorname{Re}\{a_k\} + j \operatorname{Im}\{a_k\}$$

$\operatorname{Re}\{a_{-k}\} + j \operatorname{Im}\{a_{-k}\}$

$= |a_k| e^{j\angle a_k}$

$\operatorname{Re}\{a_k\} - j \operatorname{Im}\{a_k\}$

$\operatorname{Re}\{a_k\}$ is even , $\operatorname{Im}\{a_k\}$ is odd
 or $|a_k|$ is even, $\angle a_k$ is odd

- Time shift $x(t) \longleftrightarrow a_k$
 $x(t - t_o) \longleftrightarrow a_k e^{-jk\omega_o t_o} = a_k e^{-jk2\pi t_o / T}$

Introduce a linear phase shift $\propto t_o$

● Time Reversal

$$x(-t) \xleftrightarrow{FS} a_{-k}$$

the effect of sign change for $x(t)$ and a_k are **identical**

Example: $x(t): \dots a_{-2} a_{-1} a_0 a_1 a_2 \dots$

$x(-t): \dots a_2 a_1 a_0 a_{-1} a_{-2} \dots$

● Time Scaling

α : positive real number

$x(\alpha t)$: periodic with period T/α and fundamental frequency $\alpha\omega_0$

$$x(\alpha t) = \sum_{k=-\infty}^{\infty} a_k e^{jk(\alpha\omega_0)t}$$

a_k **unchanged**, but $x(\alpha t)$ and each harmonic component are different

$$\begin{aligned}
 c_k &= \frac{1}{T} \int_T \sum_n \sum_l a_n b_l e^{j(n+l)\omega_0 t} e^{-jk\omega_0 t} dt \\
 &= \sum_n \sum_l a_n b_l \delta(k - (n + l)) \\
 &= \sum_n a_n b_{k-n}
 \end{aligned}$$

- Multiplication Property**

$x(t) \longleftrightarrow a_k$, $y(t) \longleftrightarrow b_k$ (Both $x(t)$ and $y(t)$ are periodic with the same period T)

$$x(t) \cdot y(t) \longleftrightarrow c_k = \sum_{l=-\infty}^{+\infty} a_l b_{k-l} = a_k * b_k$$

Proof:

$$\underbrace{\sum_l a_l e^{jl\omega_0 t}}_{x(t)} \cdot \underbrace{\sum_m b_m e^{jm\omega_0 t}}_{y(t)} = \sum_{l,m} a_l b_m e^{j(l+m)\omega_0 t} \xrightarrow{l+m=k} \sum_k \left[\underbrace{\sum_l a_l b_{k-l}}_{c_k} \right] e^{jk\omega_0 t}$$

● Parseval Relation

$$\underbrace{\frac{1}{T} \int_T |x(t)|^2 dt}_{\text{Average Signal Power}} = \sum_{k=-\infty}^{\infty} \underbrace{|a_k|^2}_{\text{Power of component } e^{jk\omega_0 t}}$$

Observation: power is the same whether measured in the time-domain or the frequency-domain

Proof:

$$\begin{aligned} \frac{1}{T} \int_T |x(t)|^2 dt &= \left\langle \sum_{l=-\infty}^{+\infty} a_l e^{jl\omega_0 t}, \sum_{k=-\infty}^{+\infty} a_k e^{jk\omega_0 t} \right\rangle \\ &= \sum_{k=-\infty}^{+\infty} \left\langle a_k e^{jk\omega_0 t}, a_k e^{jk\omega_0 t} \right\rangle = \sum_{k=-\infty}^{+\infty} |a_k|^2 \end{aligned}$$

More

- **Frequency shifting**

$$e^{jM\omega_0 t} x(t) \longleftrightarrow a_{k-M}$$

Note:

$x(t)$ is periodic with
fundamental frequency ω_0

$$x(t) \longleftrightarrow a_k$$

- **Differentiation**

$$\frac{dx}{dt} \longleftrightarrow jk\omega_0 a_k$$

- **Integration**

$$\int_{-\infty}^t x(t) dt \longleftrightarrow \left(\frac{1}{jk\omega_0} \right) a_k$$

TABLE 3.1 PROPERTIES OF CONTINUOUS-TIME FOURIER SERIES

Property	Section	Periodic Signal	Fourier Series Coefficients
		$\left. \begin{array}{l} x(t) \\ y(t) \end{array} \right\} \begin{array}{l} \text{Periodic with period } T \text{ and} \\ \text{fundamental frequency } \omega_0 = 2\pi/T \end{array}$	$\begin{array}{l} a_k \\ b_k \end{array}$
Linearity	3.5.1	$Ax(t) + By(t)$	$Aa_k + Bb_k$
Time Shifting	3.5.2	$x(t - t_0)$	$a_k e^{-jk\omega_0 t_0} = a_k e^{-jk(2\pi/T)t_0}$
Frequency Shifting		$e^{jM\omega_0 t} = e^{jM(2\pi/T)t} x(t)$	a_{k-M}
Conjugation	3.5.6	$x^*(t)$	a_k^*
Time Reversal	3.5.3	$x(-t)$	a_{-k}
Time Scaling	3.5.4	$x(\alpha t), \alpha > 0$ (periodic with period T/α)	a_k
Periodic Convolution		$\int_{-\infty}^{\infty} x(\tau)y(t-\tau)d\tau$	$Ta_k b_k$
Multiplication	3.5.5	$x(t)y(t)$	$\sum_{l=-\infty}^{\infty} a_l b_{k-l}$
Differentiation		$\frac{dx(t)}{dt}$	$jk\omega_0 a_k = jk \frac{2\pi}{T} a_k$
Integration		$\int_{-\infty}^t x(\tau) d\tau$ (finite valued and periodic only if $a_0 = 0$)	$\left(\frac{1}{jk\omega_0}\right)a_k = \left(\frac{1}{jk \frac{2\pi}{T}}\right)a_k$
Conjugate Symmetry for Real Signals	3.5.6	$x(t)$ real	$\begin{cases} a_k = a_{-k}^* \\ \operatorname{Re}\{a_k\} = \operatorname{Re}\{a_{-k}\} \\ \operatorname{Im}\{a_k\} = -\operatorname{Im}\{a_{-k}\} \\ a_k = a_{-k} \\ \angle a_k = -\angle a_{-k} \end{cases}$
Real and Even Signals	3.5.6	$x(t)$ real and even	a_k real and even
Real and Odd Signals	3.5.6	$x(t)$ real and odd	a_k purely imaginary and odd
Even-Odd Decomposition of Real Signals		$\begin{cases} x_e(t) = \operatorname{Ev}\{x(t)\} & [x(t) \text{ real}] \\ x_o(t) = \operatorname{Od}\{x(t)\} & [x(t) \text{ real}] \end{cases}$	$\begin{array}{l} \operatorname{Re}\{a_k\} \\ j\operatorname{Im}\{a_k\} \end{array}$

Parseval's Relation for Periodic Signals

$$\frac{1}{T} \int_T |x(t)|^2 dt = \sum_{k=-\infty}^{\infty} |a_k|^2$$

Summary

- **Difference between periodic and aperiodic signals**
- **Eigenfunction and eigenvalue**
- **Fourier series for periodic signal**
 - ◆ **Analysis and synthesis equations**
 - ◆ **Properties**
 - ◆ **More: Gibbs phenomenon, Dirichlet conditions**