

Battery in: fuse and reverse-plug protection

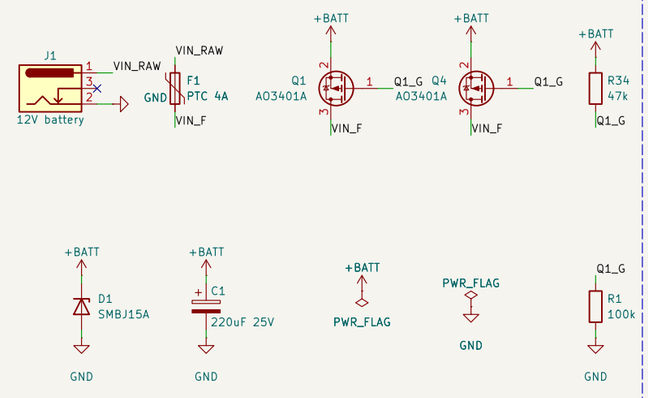

3S lithium-ion pack, 9.0 to 12.6 V, on its barrel plug (centre positive). Q1 and Q4 stay off if the plug is wired the other way round. R34 and R1 hold their gates at a third of the battery.


Motor supply and kill switch

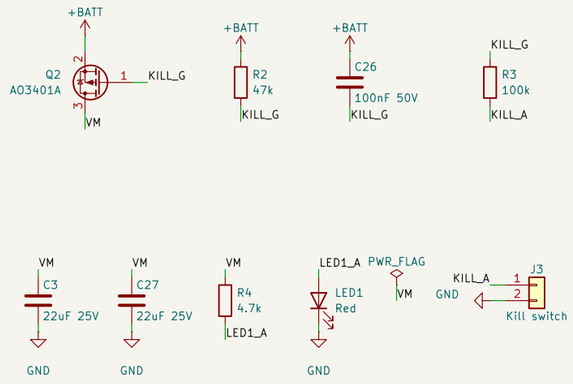


Switch closed (or a jumper on J3): motor supply on. Open, unplugged or a broken wire: off within about 6 ms. C26 keeps Q2 off while the battery is plugged in.

Motor driver, current limit and watchdog

Current limit = 3.3 V / R5 / 1000 uA/A: 2.2k gives 1.5 A. All resistors 1%.

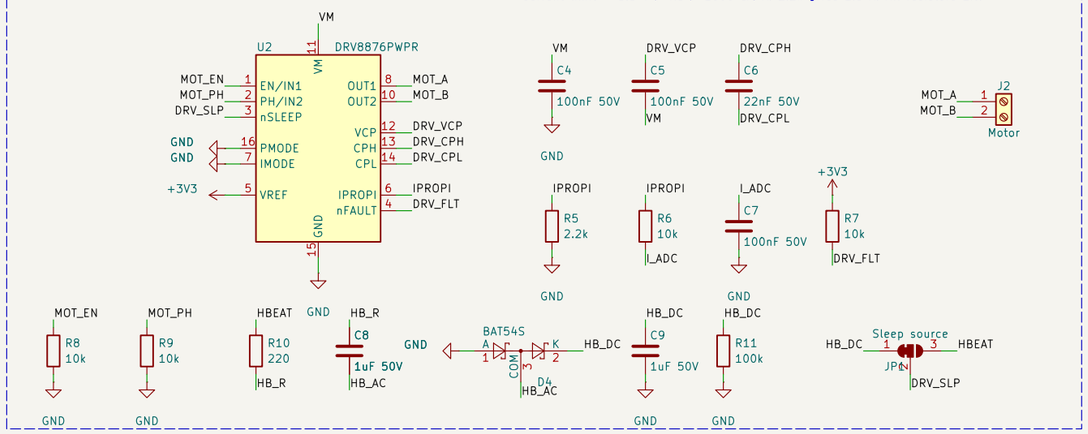


12 V to 5 V, 3 A

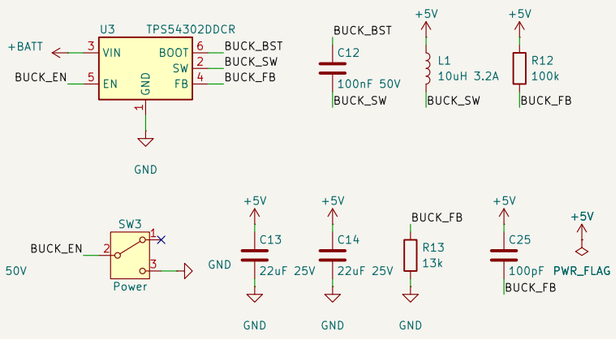


SW3 to ground: converter off, so the processor is off. 100k and 13k give 5.2 V.


3.3 V

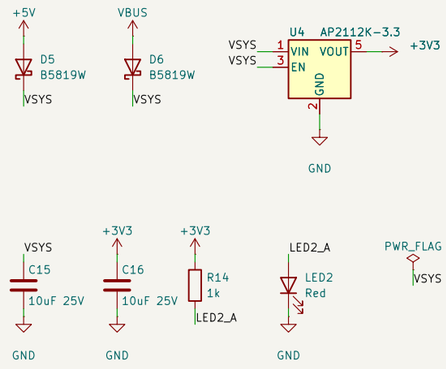


5 V out for the phone (not fitted)

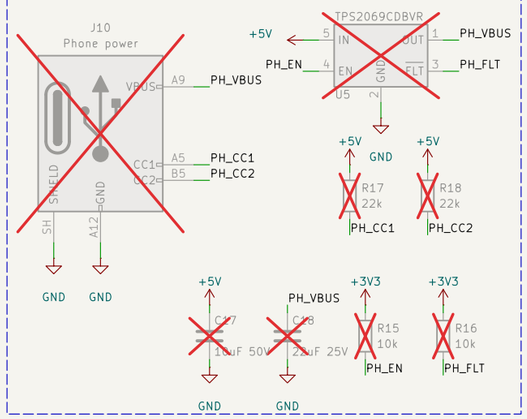


USB-C for firmware

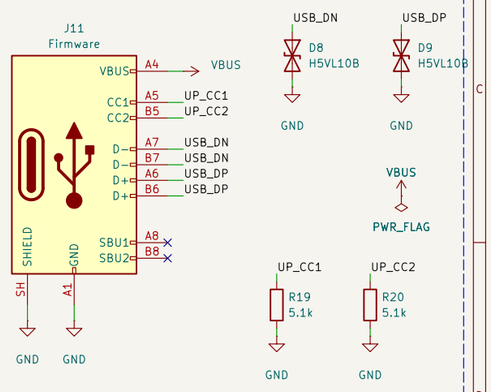


Processor: ESP32-S3

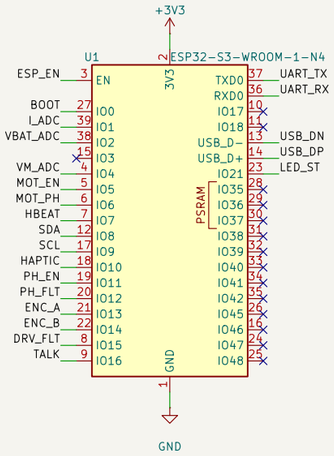

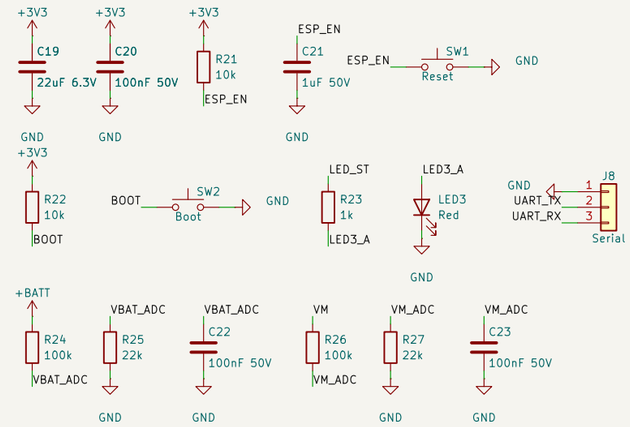

I03, I045, I046 are boot-mode pins: left open.
I035 to I037 are left open so a module with more memory also fits.

Talk button, encoder, I2C, handle buzzer

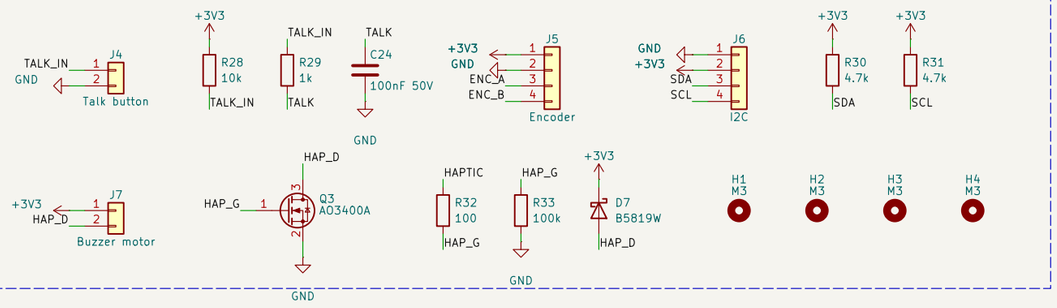

Drawn by make_board.py. Not built or tested.

Sheet: /
File: cane-board.kicad_sch

Title: SightSense cane board

Size: A3	Date: 2026-10-13	**Rev: 0.1**
KiCad E.D.A. 10.0.6		Id: 1/1