METRIC

A-A-59003/11
31 May 1995
Superseding
MIL-A-21577/11
20 October 1982

COMMERCIAL ITEM DESCRIPTION

AMPLIFIERS, AUDIO FREQUENCY; BOOSTER AMPLIFIER - AUDIO - 20 WATT SHIPBOARD ANNOUNCING

The General Services Administration has authorized the use of this commercial item description as a replacement for MIL-A-21577/11 which is canceled.

1. **Scope**. This commercial item description covers the detailed requirements for an audio frequency booster amplifier for shipboard announcing circuits.

2. **Salient characteristics**.

2.1 **Booster amplifier**. The booster amplifier shall be in accordance with A-A-59003 and as specified herein. Whenever a requirement of A-A-59003 conflicts with a requirements of this specification, the requirements on this specification sheet shall govern.

2.2 **General requirements**. The booster amplifier shall perform equivalent to the form, fit, and function of the schematic and wiring diagram in figures 1 and 2.

2.3 **Relay**. The K relay shall be hermetically sealed plug-in type (see figures 1 and 2). There shall be four double- throw isolated poles. The relay coil operating voltage shall be 24 to 32 volts direct current (vdc). This voltage shall be supplied from the amplifier dc supply so that failure of this supply will deenergize the relay and pass the audio signal unboosted on to the speaker load.

2.4 **Amplifier**. If the contractor has produced and supplied to the Navy a 20-watt amplifier acceptable within the requirements as specified herein, the same electrical components shall be used. The assembly may be rearranged as necessary for the selected enclosure (see 3.9).

2.5 **Lamp**. The ON lamp shall be a glow lamp. The lamp shall indicate when the amplifier dc supply voltage is available, either directly or by using relay K contacts.

2.6 **Fuses**. Fuses shall protect the amplifier power supply and the amplifier.

3. **Quality assurance**. Sampling, examination, and tests shall be in accordance with A-A-59003.

AMSC N/A

FSC 6320

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:01Z
Check the source to verify that this is the current version before use.

4. **Packaging**. - Packaging shall be in accordance with A-A-59003.

5. **Notes**.

5.1 **Intended use**. The booster amplifier, is intended for use in shipboard announcing circuits.

5.2 **Notes**. The notes specified in A-A-59003 are applicable to this specification.

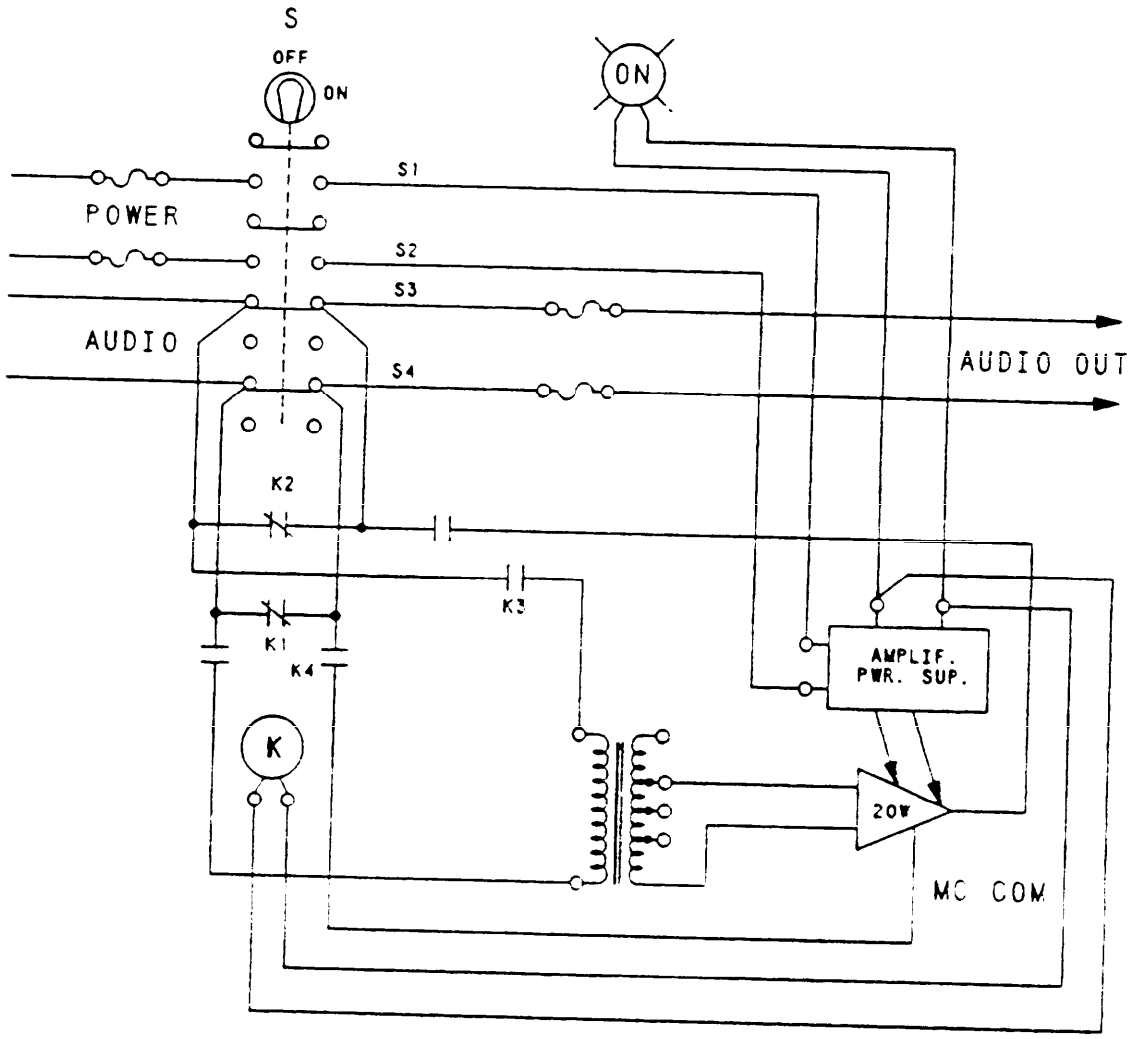


FIGURE 1. Booster amplifier schematic diagram.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:01Z
Check the source to verify that this is the current version before use.

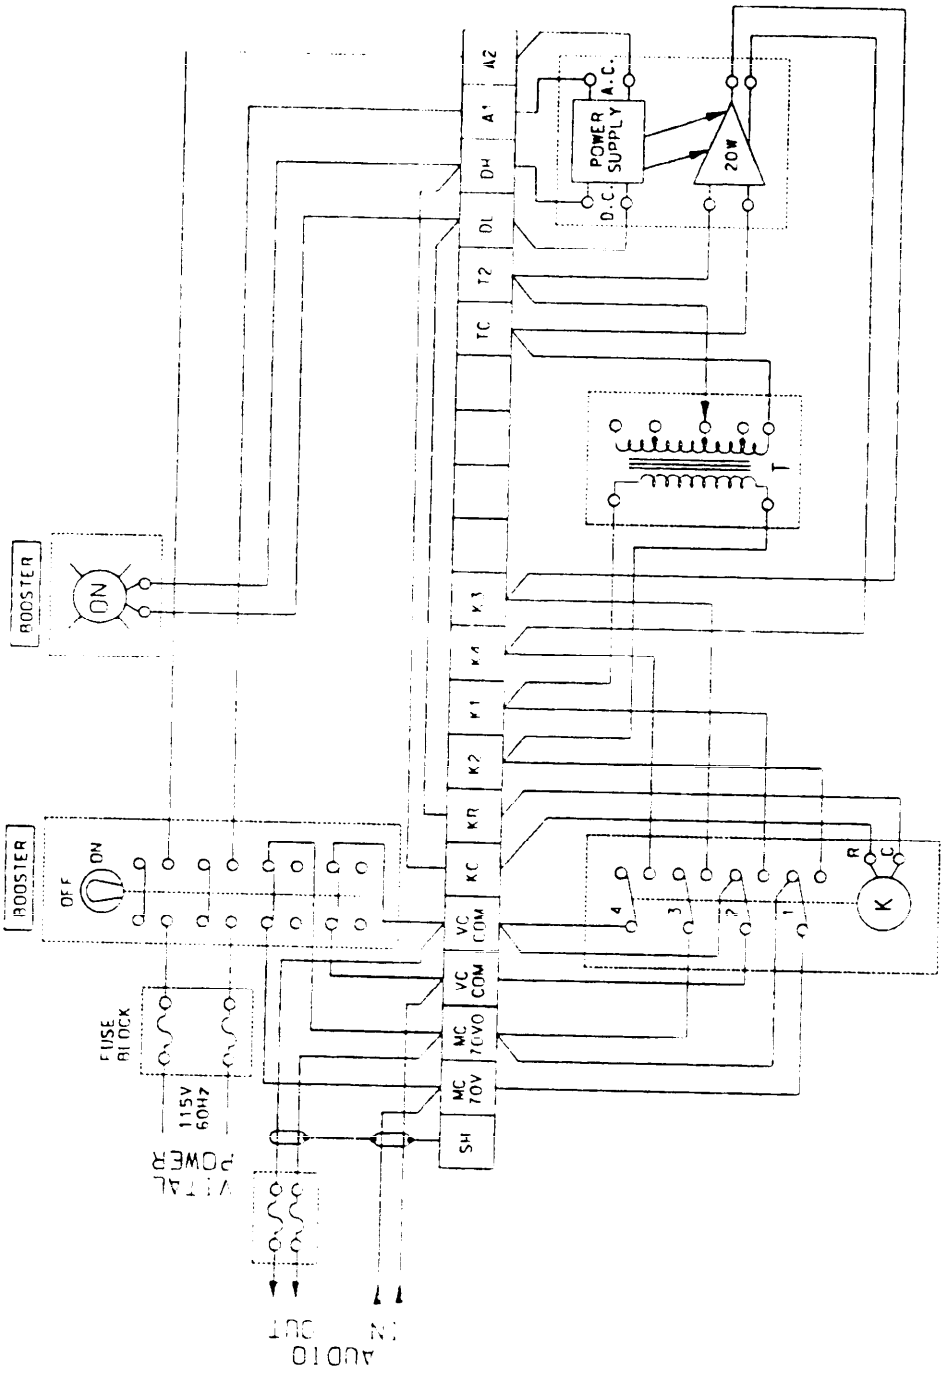


FIGURE 2. Booster amplifier wiring diagram.

Preparing Activity
Navy - SH
(Project 6320-N057

Source: https://assist.dla.mil -- Downloaded: 202610-26T10:01Z
Check the source to verify that this is the currentversion before use.