INCH-POUND

MIL-M-28787/130A
AMENDMENT 2
31 December 1992
SUPERSEDING
AMENDMENT 1
30 November 1983

MILITARY SPECIFICATION

MODULES, STANDARD ELECTRONIC

NETWORK, MISCELLANEOUS, POWER, KEY CODE QPL

This amendment forms a part of Military Specification MIL-M-28787/130A(EC), dated 3 May 1979, and is approved for use by all Departments and Agencies of the Department of Defense

PAGE 1

At bottom right hand corner of page add "FSC 5963".

PAGE 5

4.3: Delete and substitute the following:

"4.3 Test equipment. Test equipment specified on figures and in tables with a type designator shall be as specified in MIL-STD-1665. Other equipment and components shall be as specified on the figures. All resistors shall be metal film and all capacitors shall be ceramic unless otherwise specified."

PAGE 6

6.3: Delete and substitute the following:

"6.3 Cross reference of classification. Military Specification MIL-M-28787/130 supersedes Department of the Navy, Naval Ordnance Systems Command Drawing No. 10001-2658662. Part number M28787/130-1 supersedes part numbers 2658662 and M28787/130."

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:12Z
Check the source to verify that this is the current version before use.

MIL-M-28787/130A
AMENDMENT 2

PAGES 7 AND 8

*FIGURE 2: Delete and substitute new figure 2 as printed on pages 3 and 4 of this amendment.

PAGE 16

FIGURE 4: Delete and substitute new figure 4 as printed on page 5 of this amendment.

PAGE 19

*FIGURE 5: Delete and substitute new figure 5 as printed on page 6 of this amendment.

PAGE 21

FIGURE 6: Delete and substitute new figure 6 as printed on page 7 of this amendment.

PAGE 23

FIGURE 7: Delete and substitute new figure 7 as printed on page 8 of this amendment.

NOTE: The margins of this amendment are marked with an asterisk or vertical lines to indicate where changes (additions, modifications, corrections, deletions) from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.

Custodians:
Army - ER
Navy - SH
Air Force - 85

Review activities:
Army - AT
Navy - AS, MC
Air Force - 13, 19
DLA - ES

Preparing activity:
Navy - NW

(Project 5963-0138)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:12Z
Check the source to verify that this is the current version before use.

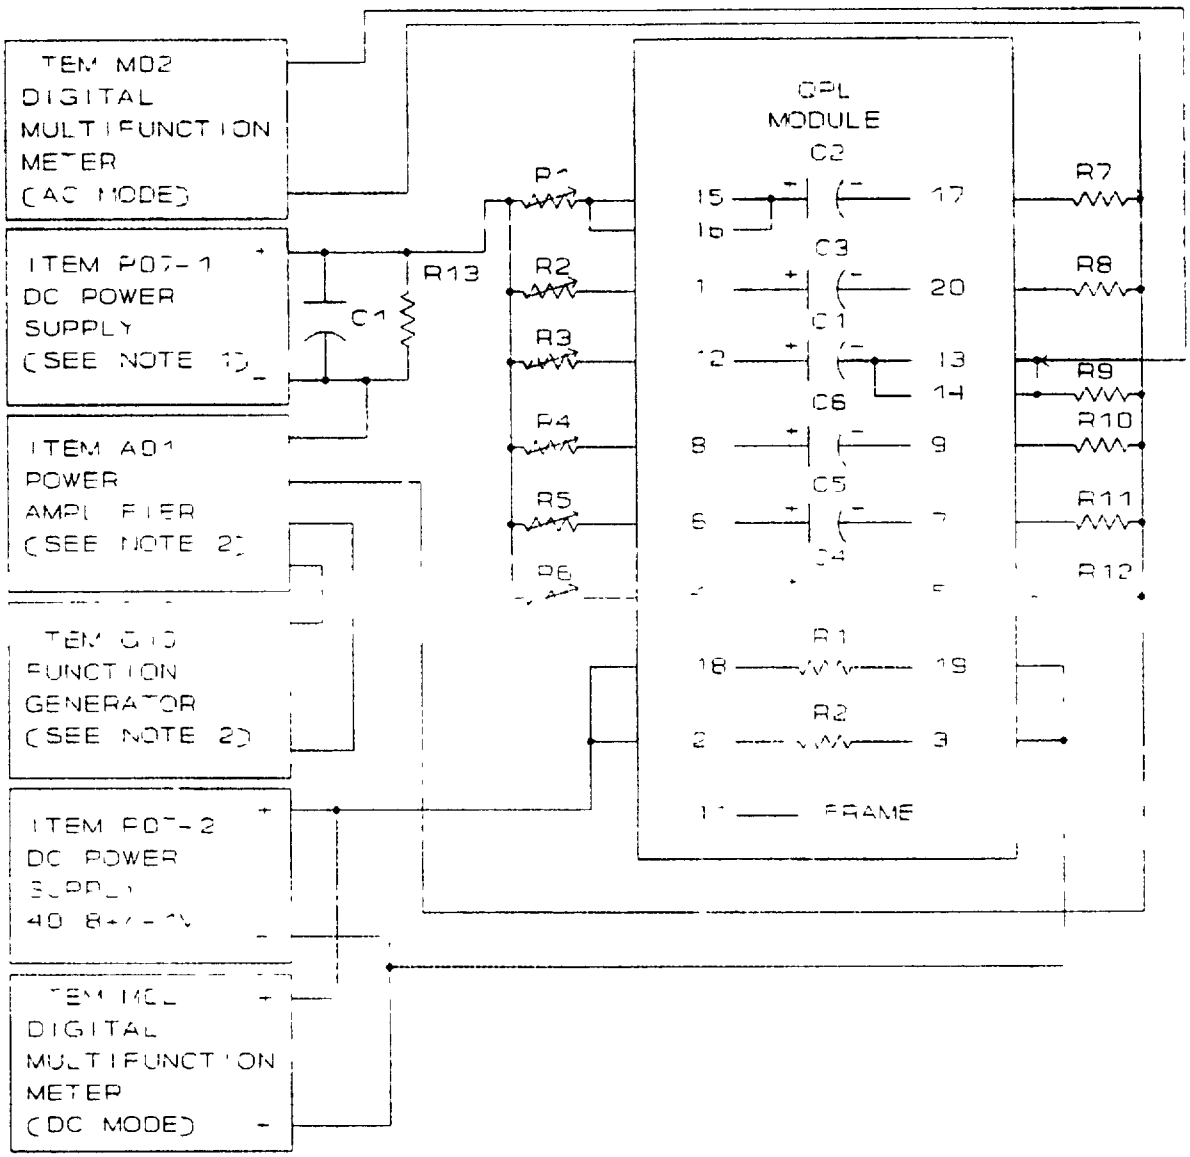



FIGURE 2 Operating temperature, component temperature, and life test circuit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:12Z
Check the source to verify that this is the current version before use.

NOTES:
1. The ripple voltage shall be superimposed upon a direct current voltage equal to 2/3 of the specified working voltage limit.
2. An alternate power source such as a variac or powerstat and stepdown transformer with 60 Hz line input power may be used. The output voltage shall be adjusted so that the requirements of note 4 can be met.
3. Capacitors shall be energized with the following:
   (a) Ripple current rating at 60 Hz shall be 440 mArms for C2 (pins 15 and 16, to 17), C3 (pin 1 to 20), and C1 (pin 12 to 13, and 14).
   (b) Ripple current rating at 60 Hz shall be 330 mArms for C6 (pin 8 to 9), C5 (pin 6 to 7), and C4 (pin 4 to 5).
4. Adjust R1 through R6 per notes 3 (a) and 3 (b), using a voltage drop across resistors R7 through R12 to determine the current.
5. R1-R6 = 15Ω ± 10%, 4 W, variable.
6. R7-R12 = 0.1Ω ± 1%, 5 W.
7. R13 = 205Ω ± 5%, 30 W.
8. C1 ≥ 10,000 μF, 75 Vdc.

FIGURE 2 Operating temperature, component temperature, and life test circuit - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:12Z
Check the source to verify that this is the current version before use.

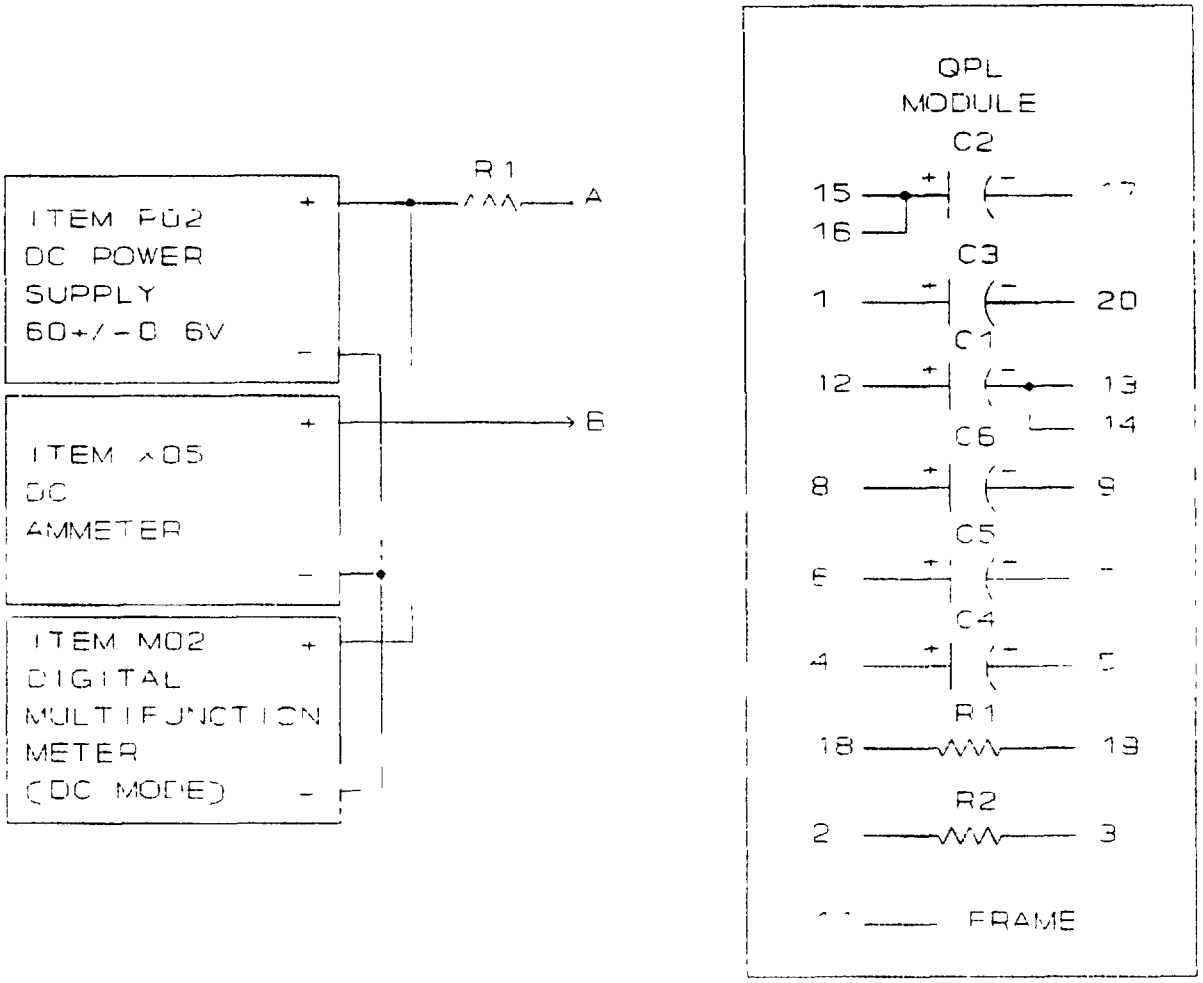


CAUTION:
Observe proper polarity.

NOTES:
1. R1 = 1 kΩ ± 10%, 5 W.
2. Unit conforms to requirements if leakage drops below limit indicated in table III in five minutes or less.

FIGURE 4. DC leakage test circuit for table III.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:12Z
Check the source to verify that this is the current version before use.

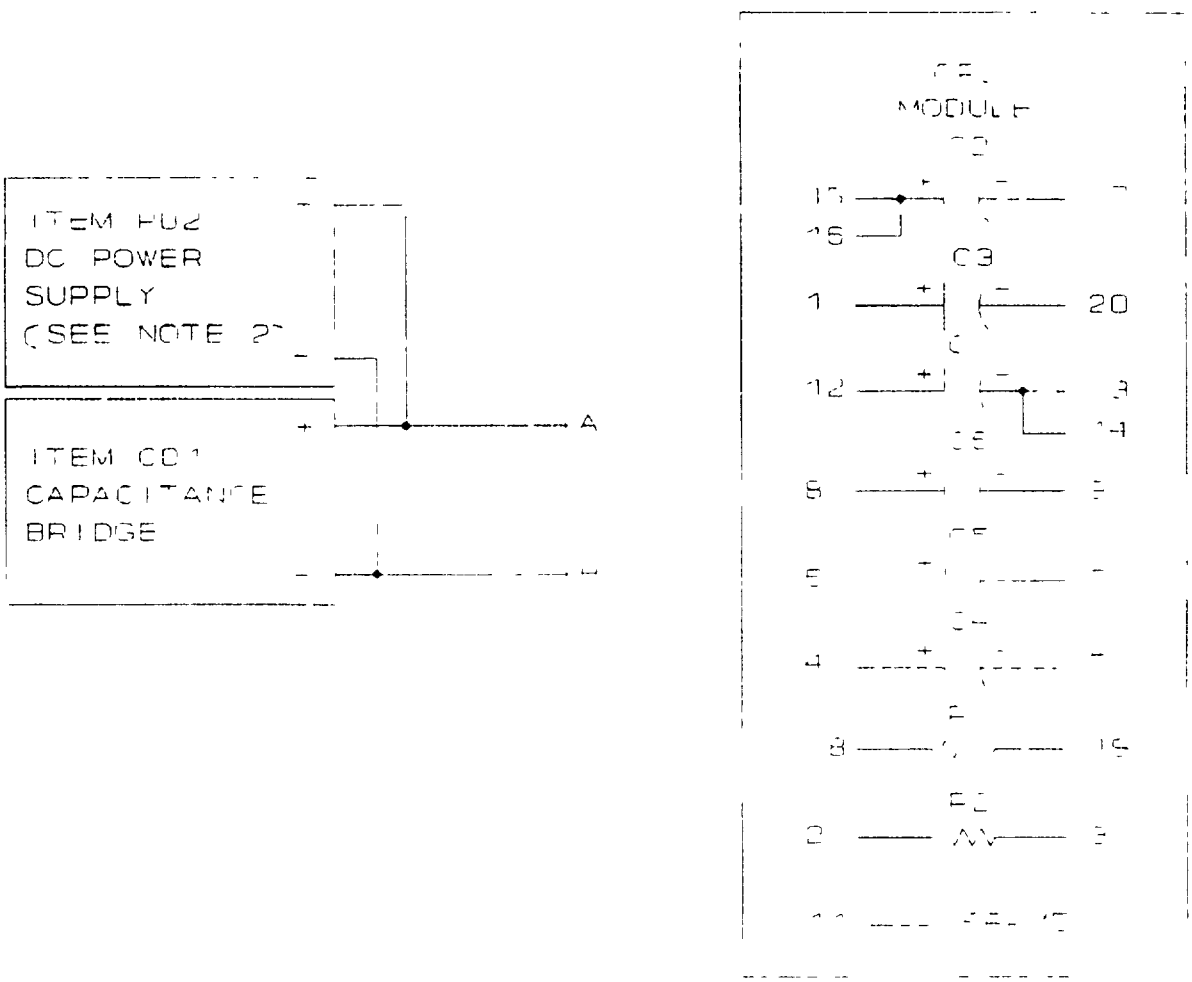

NOTES:
1. Circuit shown for GR capacitance bridge.
2. The ac voltage shall not exceed 0.707 Vrms at 120 ± 6 Hz, this shall be superimposed on a polarizing voltage of 1.4 ± 0.1 Vdc.
3. For test conditions D1-D8, the total test circuit load resistance shall not exceed 50 milliohms.

FIGURE 5 Capacitance and dissipation factor test circuit for tables IV and V

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:12Z
Check the source to verify that this is the current version before use.


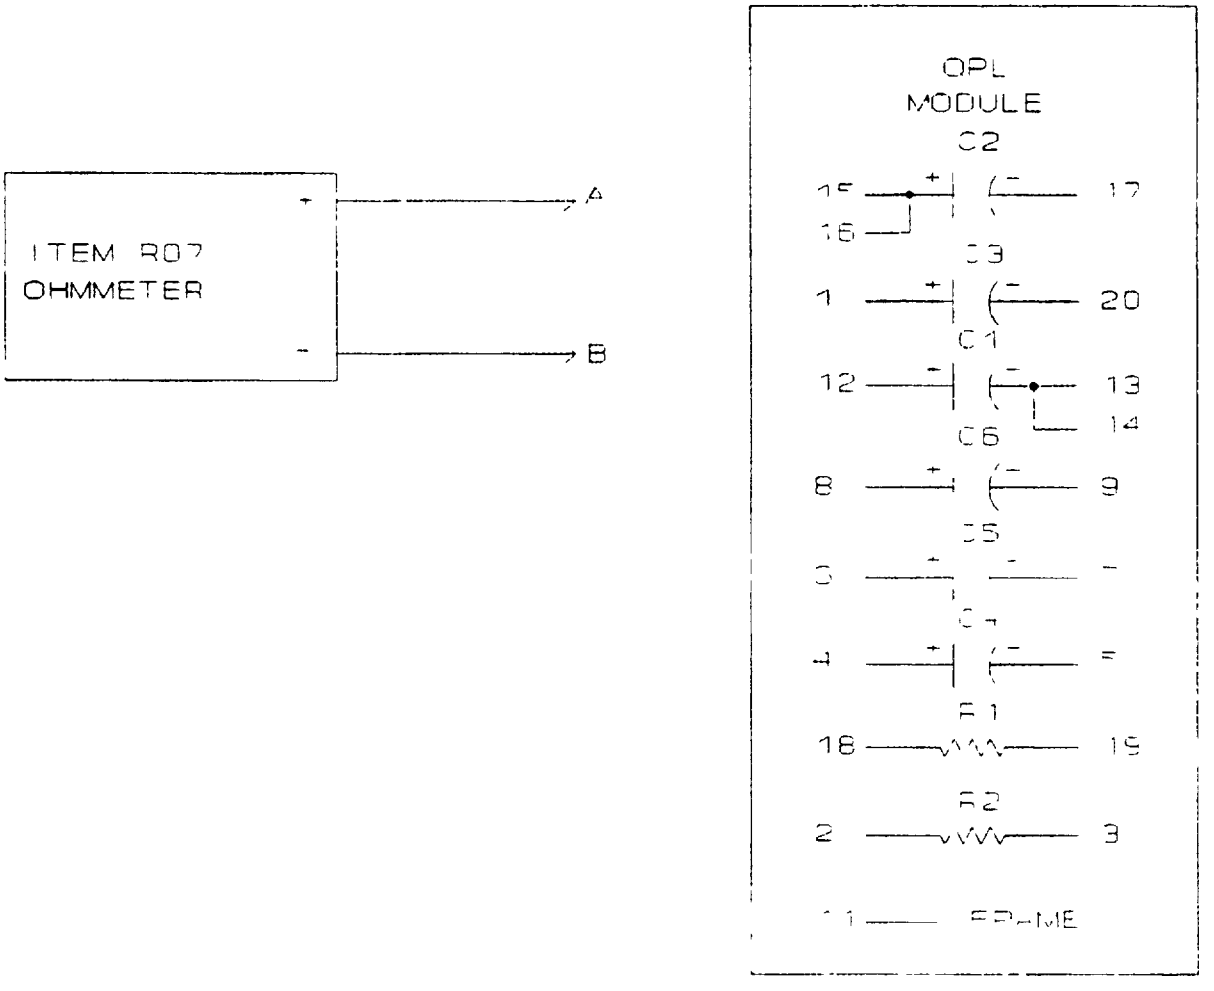


FIGURE 6. DC resistance test circuit for table VI.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:12Z
Check the source to verify that this is the current version before use.

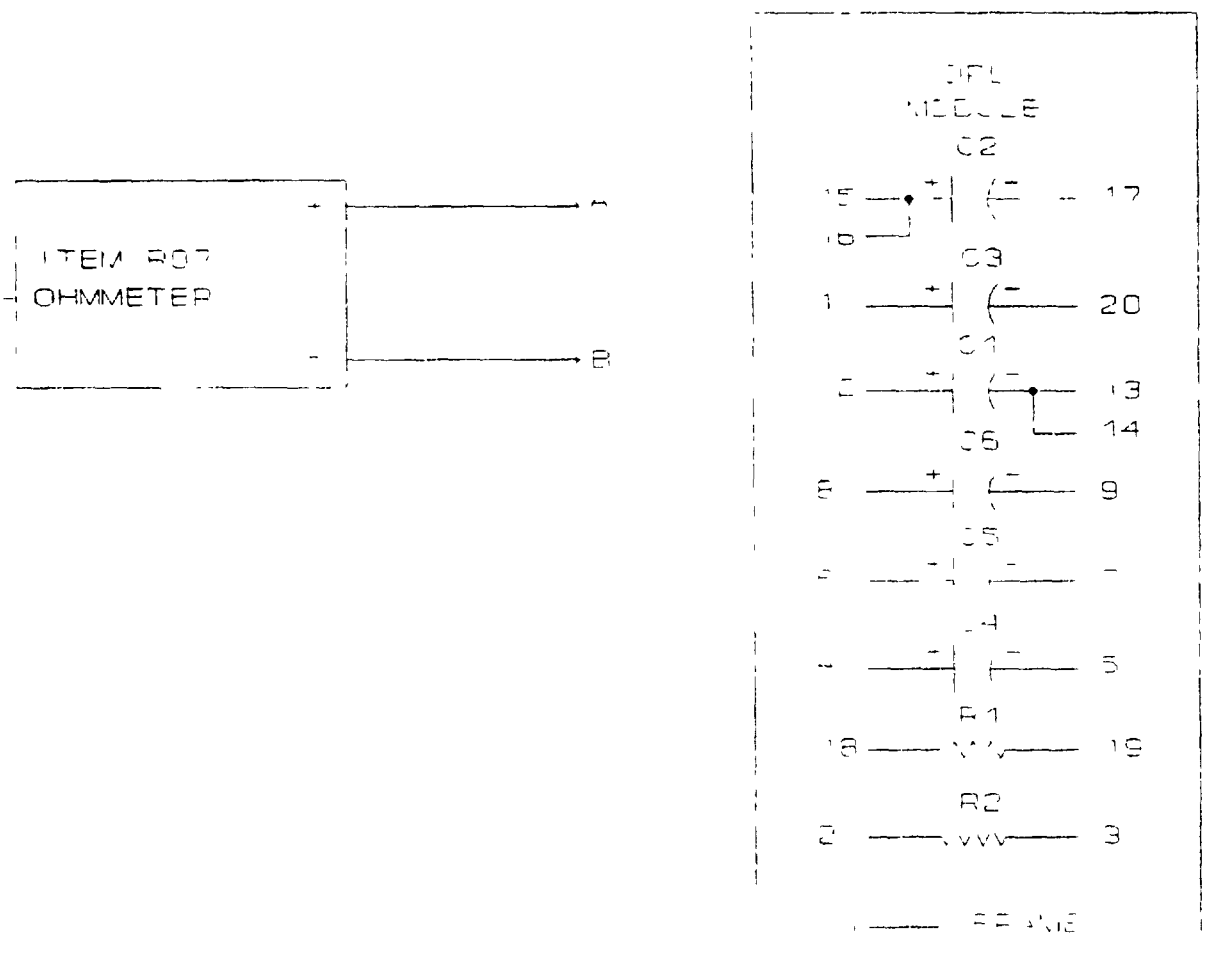

NOTE: Penetrate the anodized finish with a sharply pointed probe to obtain electrical contact.

FIGURE 7. Continuity test circuit for table VII

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:12Z
Check the source to verify that this is the current version before use.