MILITARY SPECIFICATION

INTERCOMMUNICATION STATIONS

NAVAL SHIPBOARD

This amendment forms a part of Military Specification MIL-I-24078(SHIPS), 14 September 1964.

Page 1, paragraph 2.1, Specification MIL-L-12606, line 2: Delete "Type LS-445/V" and substitute "Type LS-445/U."

Page 6, paragraph 3.24: Add: "Operation of the LS-519/SIC intercommunication station shall be identical to that of the LS-518/SIC."

Page 7, paragraph 3.24.5: Delete and substitute:

"3.24.5 Operation of equipment with remote loudspeaker stations.- Intercommunication stations furnished under this specification shall be capable of performing in the manner specified herein when used with one or more remote loudspeaker stations. The remote loudspeaker station shall include: (1) an LS-305/SIC(IC/SAA) or LS-306/SIC(IC/SAG) loudspeaker manufactured in accordance with requirements of MIL-A-20222 for loudspeaker type IC/SAA or IC/SAG; (2) two talk switches; and (3) a busy indicator lamp. The remote loudspeaker station circuitry will be in accordance with figure 3.

"3.24.5.1 Wiring of intercommunication stations for use with remote loudspeaker stations.-

"3.24.5.1.1 As required by 3.13.1, terminals shall be provided on the terminal board in the intercommunication station for connection of ship's wiring from the loudspeaker station(s) being used.

"3.24.5.1.2 Means shall be provided to allow individual loudspeaker stations to be assigned to station selector switches of the master station on the basis of one loudspeaker station for each selector switch pushbutton. With one or more selector switch pushbutton(s) assigned to individual loudspeaker stations, the remaining master station selector switches shall be available for assignment to call other intercommunication stations in the system. The LS-518/SIC shall be capable of working with from 1 to 10 remote loudspeaker stations. The LS-519/SIC shall be capable of working with from 1 to 20 remote loudspeaker stations.

"3.24.5.1.3 Type LS-518/SIC and LS-519/SIC intercommunication stations shall be factory wired for use in a system made up of intercommunication stations. Any wiring modification necessary for using the units with remote loudspeaker stations will be made during installation. The technical manual shall include detailed information on any wiring changes that are necessary.

3.24.5.2 Master station calling remote loudspeaker station.- Operation of the master station (LS-518/SIC or LS-519/SIC) to call a remote loudspeaker station shall be as follows:

- **"(a) Master station depresses the station selector switch pushbutton associated with the called station to select an individual loudspeaker station.**
- **"(b) The master station operator then depresses the press-to-talk switch and speaks into the loudspeaker. Speech is heard at the remote loudspeaker station.**
- **"(c) Master station releases press-to-talk switch and waits for reply from remote loudspeaker station. Loudspeaker station operator replies without operating any switches by simply talking into the remote loudspeaker.**
- **"(d) Master station operator releases station selector switch at end of call to return the station to standby condition.**

"3.24.5.3 Remote loudspeaker station calling master station.- Operation of the loudspeaker station to originate a call to a master station shall be as follows:

Source: https://assist.dla.mil -- Downloaded: 202610-19T18:56Z
Check the source to verify that this is the current version before use.

"(a) The loudspeaker station talk switch associated with the master station being called is operated to the 'talk' position. If the selected master station is busy, the loudspeaker busy lamp shall light, indicating the master station should not be called.

"(b) If the busy lamp remains unlit when the talk switch is operated to the 'talk' position, the master station is idle. With the switch in the 'talk' position, the loudspeaker station operator speaks into the loudspeaker. Speech will be heard at the master station.

"(c) After the initial transmission to the master station, the speaker station operator releases the talk switch to the 'normal' position. The master station then replies by operating the press-to-talk switch.

"(d) If, when the master station is called by a remote loudspeaker station, the master station selector switch is operated to select the station originating the call, operation shall be as specified in 3.24.5.2 until the end of the conversation."

Page 10, paragraph 3.26.13: Delete and substitute:

"3.26.13 Overall frequency response.- The overall frequency response, using the loudspeaker as a microphone and using a type IC/MPM-4 microphone, shall fall within the limits for the overall frequency response curves shown on figure 2 when tested as specified in 4.6.4 and 4.6.5."

Page 13, paragraph 4.6.1: Delete and substitute:

"4.6.1 Operating test.- The operating test shall be performed with the unit mounted in its case (to insure that the plug and jack connectors are mating properly). Operation of the unit shall be tested under the conditions specified in 4.6.1.1 and 4.6.1.2.

"4.6.1.1 Operation with LS-386/SIC or LS-385/SIC intercommunication station.- The equipment station shall be tested with an LS-386/SIC or LS-385/SIC intercommunication station for compliance with the operational requirements of paragraph 3.24.1. If an LS-386/SIC or LS-385/SIC is not available, a circuit model of the LS-386/SIC control circuitry shall be constructed and used for the test.

"4.6.1.2 Operation with remote loudspeaker station.- The equipment station shall be tested for compliance with the operational requirements of 3.24.5, using an LS-306/SIC loudspeaker (or equivalent), talk switches, and a busy lamp, as specified."

Page 14, paragraph 4.6.8(d), lines 2 and 3: Delete "type LS-385/SIC or LS-386/SIC station" and substitute "master station (LS-385/SIC, LS-386/SIC, LS-518/SIC or LS-519/SIC)."

Add attached figure 3.

Preparing activity:
Navy - SH
(Project 5835 -NI01Sh)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:56Z
Check the source to verify that this is the current version before use.

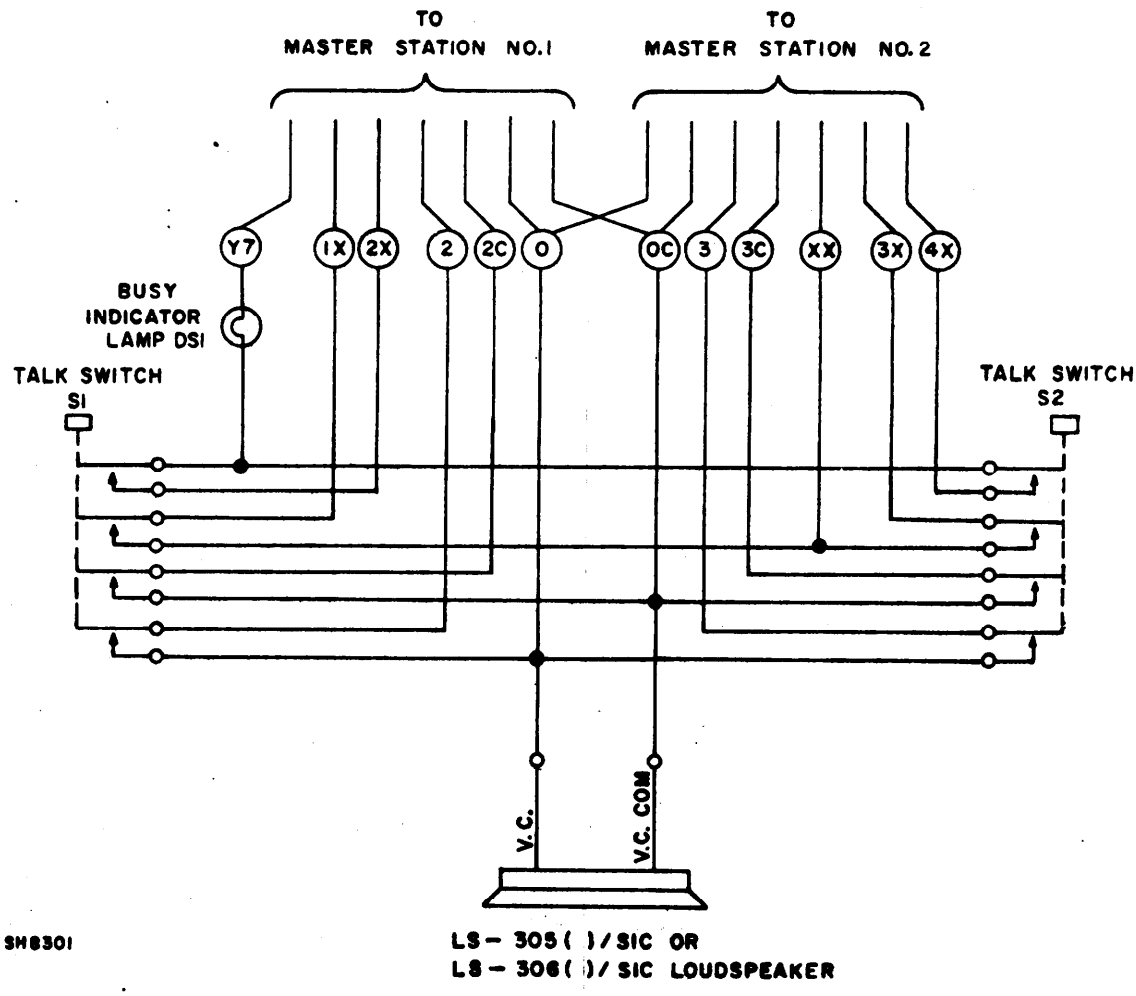


Figure 3- Schematic diagram for remote loudspeaker station.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:56Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:56Z
Check the source to verify that this is the current version before use.