MILITARY SPECIFICATION

DIMMER, LAMP, 60 WATT, 120 VOLT,

MEDIUM SCREW BASE AND SOCKET

This amendment forms a part of Military Specification MIL-D-12313C(ME), dated 17 June 1971, and is approved for use by all Departments and Agencies of the Department of Defense.

3.4, delete and substitute:

"3.4 Dimming device. Dimming shall be accomplished by a resistor or auto transformer at the option of the supplier. The dimming device shall be mounted inside the housing.

3.4.1 Resistor. When a resistor is furnished, the resistor shall be wire wound, vitreous enamel covered, 300 ohms, plus or minus 15 percent. The resistor shall be wired in series with the base and socket as shown in Figure 2.

3.4.2 Auto transformer. When an auto transformer is furnished, the auto transformer shall convert power from 120 volts to 53 volts at the socket of the dimmer. The auto transformer shall be wired as shown on Figure 3."

3.5, delete and substitute:

"3.5 Switch. The switch shall be a 3 ampere, 125-volt, toggle or slide switch, shall be mounted on the housing, and shall meet the requirements of UL Standards.

3.5.1 Resistor dimming device. When used with a resistor type dimming device (see 3.4.1), the switch shall be a single-pole, single-throw type. In the 'dim' position the switch contacts shall be open; in the 'bright' position, the switch contacts shall be closed (see Figure 2).

3.5.2 Auto transformer dimming device. When used with an auto transformer dimming device (see 3.4.2), the switch shall be single-pole, double-throw. In the 'dim' position the switch shall complete the circuit from dimmer base to socket which includes the auto transformer; in the 'bright' position the switch shall make a direct connection between the dimmer base and socket (see Figure 3)."

Source: https://assist.dla.mil -- Downloaded: 202640-17T22:41Z
Check the source to verify that this is the current version before use.

Page 3

3.6, delete and substitute:

"3.6 Operation. With the switch in 'bright' position and 120 volts from a 60 Hertz ac power source applied to base of dimmer, a 60 watt, 120 volt incandescent lamp in the dimmer socket shall provide the full intensity of light. When the switch is moved to 'dim' position, the light intensity of the bulb shall be reduced to that which would be obtained if lamp was connected to a 53 volt ac power source."

Page 4

4.5.1, Item 105, delete and substitute:

"105. Resistor or auto transformer, as applicable, not as specified."

4.5.2.1, delete and substitute:

"4.5.2.1 Operation. A 120 V, 60 Hertz ac power source shall be applied to the base of the dimmer with a 60 watt, 120 V incandescent lamp installed in the socket. With the switch in 'bright' position, the light intensity of lamp shall be of normal intensity. Move the switch to 'dim' position. Intensity of light shall be reduced to that obtained when bulb is connected to a 53 volt ac power source. Failure of lamp to burn at normal or reduced intensity, as indicated, shall constitute failure of this test."

Figure 1

Figure 1: Change "resistor" to "resistor or auto transformer". After Figure 1, add Figures 2 and 3.

Custodian:

Army - ME

Preparing activity:

Army - ME

Project No. 6250-A124

Source: https://assist.dla.mil -- Downloaded: 202640-17T22:41Z
Check the source to verify that this is the current version before use.

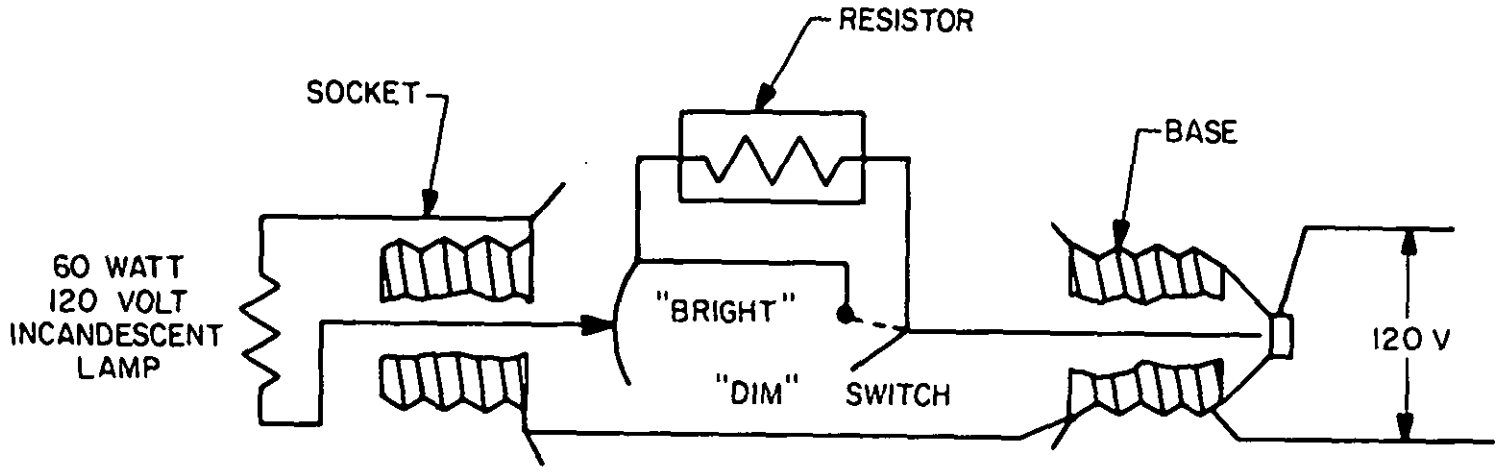


FIGURE 2. RESISTOR

X-2844

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:41Z
Check the source to verify that this is the current version before use.

☆ U. S. GOVERNMENT PRINTING OFFICE: 1974 - 713-154/5571

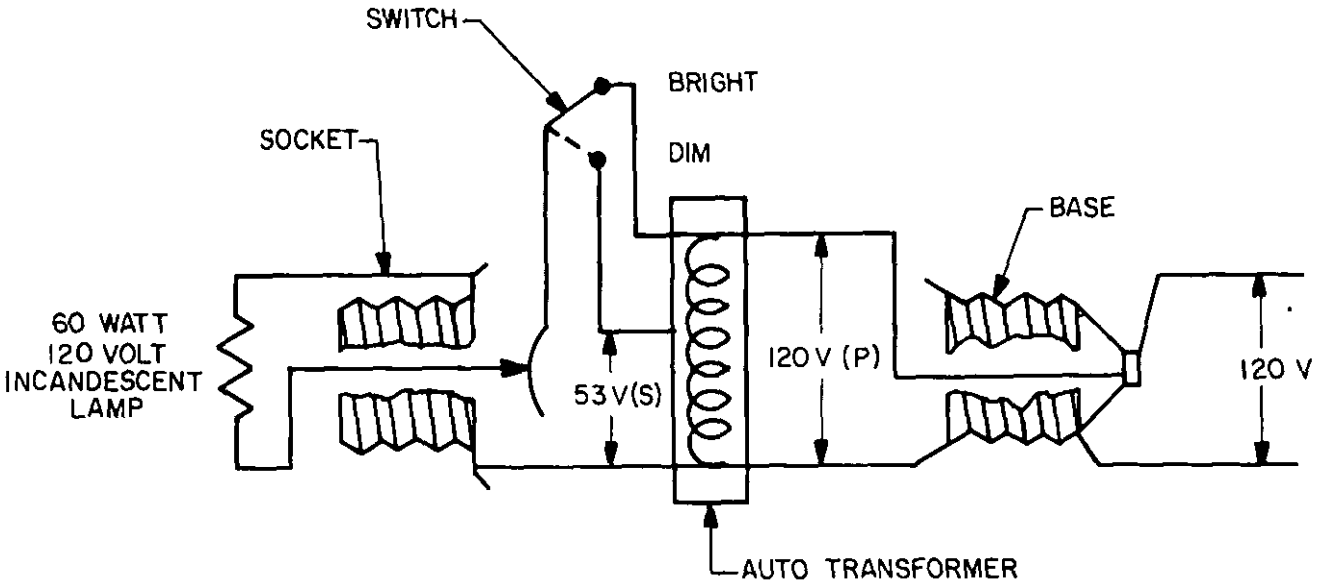


FIGURE 3. AUTOTRANSFORMER

X-2845

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:41Z
Check the source to verify that this is the current version before use.