

Creating an eFinder Pro SD card

Prepare the SDcard

Download and open the Raspberry Pi Imager App for your PC or MAC


<https://www.raspberrypi.com/software/>

Insert your microSD card into the computer via a suitable adapter.

The Raspberry Pi Imager will lead you through a number of options , select ...

- Pi model (Pi 4, CM4)
- Raspberry Pi OS (Bookworm, Legacy,64-bit) Lite, (under Pi OS other)
- Your SD card.
- Hostname – ‘efinder’
- Select your Localisation as appropriate
- Username – ‘efinder’ (note all lowercase)
- Password – your choice
- Choose your WIFI as appropriate
- Enable SSH, with password authentication

It now should look like ...

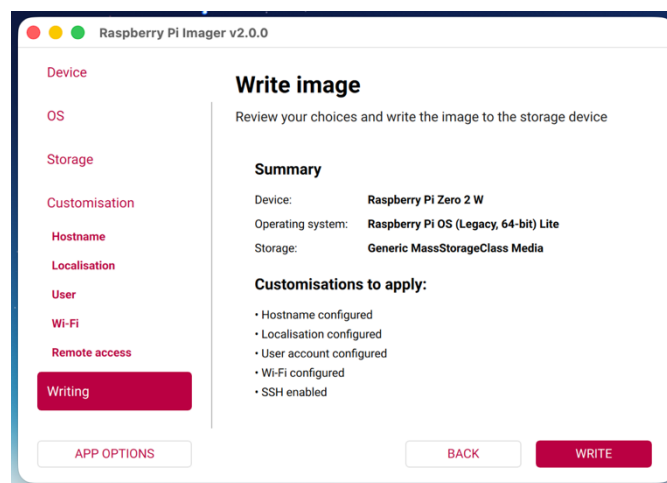

Click WRITE and after a short pause confirm.

After a few minutes your sdCard will be ready for the next stage ...

The next stage is to install the specific eFinder code ...

To access the Pi over your home network connection (ssh)

Insert the SDcard into the Pi. Power up the Pi which will go through a couple of reboots and finally connect to your home wifi network. You may also use the ethernet port on the Nano Base Board. After a few minutes open a terminal window on your PC or Mac and enter the appropriate command ...

```
ssh efinder@efinder.local
```

After agreeing to connect ('yes') and entering your set password when asked, you will see the efinder username prompt, eg 'efinder@efinder:~\$'

Install eFinder code

There are two variants.

1. The 'full' version uses a ttl to usb uart module to be communicate with the Nexus DSC Pro, leaving the Pi USB port available to connect to ServoCat etc.
2. The 'lite' version omits the uart module and uses the Pi usb port to communicate with the Nexus DSC Pro. Thus no connection to ServoCat etc is possible. In the three commands below substitute 'install_lite.sh' for 'install_full.sh'

In the terminal window, enter each of the following lines in turn. When hiting 'return' at the end of the line 1 you will see some activity. Wait for it to finish before entering the next line. The last line will initiate the install process and may take 20 minutes depending on your internet speed.

```
wget https://github.com/astrokeith/efinder_cm/raw/main/install_full.sh
sudo chmod a+x install_full.sh
./install_full.sh
```

When complete, reboot the Pi and is ready to be used. Refer to User instructions for connecting to your system.

Alternative Method

It is possible to prepare your sdCard in one operation using a Nexus eFinder image downloaded from the repository. This version will not connect to your WIFI infrastructure without user setup but will create a WIFI hotspot. This version may also not be the very latest and may require some files to be updated.

To use this method, at stage 2, select OS, select 'Use custom' then select the appropriate downloaded image 'efinder.img.gz'. Most of the subsequent steps are now automatically skipped.

Advanced Use

Nexus eFinder will automatically start and wait until a host computer connects. It first sends a simple message "ID=eFinderLite".

Note: eFinder can also be manually started from a terminal window which will show additional runtime information and error messages.

You can connect the eFinder to the file App on your Mac or PC. Samba file share at <efinder@efinder.local>, password 'efinder', selecting 'efindershare' as the volume