



UNIVERSITAT POLITÈCNICA DE CATALUNYA
BARCELONATECH

Escola Superior d'Enginyeries Industrial,
Aeroespacial i Audiovisual de Terrassa

BEKASI-EAST JAKARTA AIRPORT GROUND SIDE

Report

Degree: Master's degree in Aerospace Engineering

Course: 220304 - Airports design and construction

Delivery date: 10-12-2017

Students: Abiétar Moreno, Sergi; Delgado Chicote, Miguel; Fernández Porta, Sergi;
Fernández Sanz, Sergio; Fontanes Molina, Pol and Vidal Pedrola, Xavier



Contents

List of Tables	iii
List of Figures	iv
1 Prognosis	1
1.1 Aviation context in Indonesia	1
1.1.1 Airport location	1
1.1.2 Current traffic	2
1.1.3 Occupation factor	4
1.2 Reference aircraft	4
1.2.1 Aircraft type	5
1.2.2 Conclusions	5
1.3 Forecast computation	5
1.3.1 Passenger prediction	6
1.3.2 Operations prediction	6
1.3.3 Flights on standard day	6
2 Terminal building distribution	7
2.1 Basic dimensions of the terminal building	7
2.2 Surface distribution	7
3 Structural typology description	9
3.1 Foundation	9
3.2 Vertical elements	9
3.3 Forge	9
4 Indoor paving	10
4.1 Typology	10
4.2 Floor covering	10
4.2.1 Structural base	10
4.2.2 Intermediate layers without buttress function	10
4.2.3 Leveling layer	10
4.2.4 Grip layer	10
4.3 Design	10



4.4	Superficial layer	10
4.4.1	Common areas paving	10
4.4.2	Stairways	10
4.4.3	Restroom paving	10
4.4.4	Offices paving	10
4.4.5	Automatic baggage handling system paving	10
5	Facade	11
5.1	Front and back facade	11
5.1.1	Requirements and adopted solution	11
5.1.2	Glass	11
5.1.3	Spider system with steel pillars	11
5.1.4	Steel and concrete mixed columns	11
5.2	Lateral facade	11
5.2.1	Facade (prefabricated concrete)	11
5.3	Other elements	11
5.3.1	Main door and other sliding doors	11
5.3.2	Access bridges	11
5.3.3	Emergency doors	11
5.3.4	Automatic baggage handling system doors	11
6	Building cover	12
6.1	Adopted solution	12
6.2	Shape and inclination of the building cover	12
6.3	Used materials	12
6.4	Sewer system	12
7	Indoor closures	13
7.1	Walls	13
7.2	Doors	13
7.2.1	Baggage claim hall doors	13
7.2.2	Office access and automatic baggage handling system access doors . . .	13
8	Fire prevention regulations	14
8.1	Fire prevention regulations and chosen materials	14
8.1.1	Building elements	14
8.1.2	Materials	14
9	Bibliography	15



List of Tables

1.3.1	Airlines absorbed and operation percentages from CGK.	5
2.2.1	Estimated surfaces according to FAA (domestic flights).	7
2.2.2	Estimated surfaces according to FAA (international flights).	8
2.2.3	Total surface distribution of terminal building.	8



List of Figures

1.1.1	Bekasi-East Jakarta Airport selected location.	2
1.1.2	Soekarno-Hatta International Airport passengers by years	3
1.1.3	Soekarno-Hatta International Airport domestic flights distribution on busy day.	3
1.1.4	Soekarno-Hatta International Airport domestic flights distribution on busy day.	4
1.1.5	Soekarno-Hatta International Airport routes	4



1 | Prognosis

1.1 Aviation context in Indonesia

Indonesia is the fourth most populated country in the world and the largest economy in south-east Asia. Indonesia is also, a growing touristic destination because its outstanding nature marvels and cultural monuments. It's topography which is composed by many island makes essential the domestic air transport.

Jakarta (located at the island of Java) is the centre of government, commerce and industry of Indonesia. Currently Jakarta has an international airport (Soekarno-Hatta International Airport). It operates around the 250% over its design capacity and an interesting fact is that last year 40% of its flights were delayed. Efforts have been made to decrease this problem opening a small military airport for civilian domestic flights. Nevertheless, the problem still persists.

The current Jakarta airport cannot be expanded, due to nearby neighbourhoods. "Some news have been recently published by Jakarta authorities confirming the urge of a new airport around Jakarta to absorb the saturated traffic of the Soekarno-Hatta International Airport, even after constructing a new runway and terminal on it.

All in all, it is essential to construct a new airport. Moreover, the secondary airport, really small, is only focused on military and private services and does not have enough fields at its surroundings to expand, as Jakarta air traffic requires.

1.1.1 Airport location

The main idea to find a good location was to put the new Jakarta airport in an area not too far from the city with enough space to build a big airport which has opportunities to expand in a further future.

Following this parameters, the location chosen geographically is situated to the east of the city



of Jakarta at 32 km from the city center. It is also located above the emerging city of Bekasi that in the last years is increasing its industry hosting several multinationals. In addition, the terrain is not edified yet and extensive, plus it is non-mountainous and obstacles-free.



Figure 1.1.1: Bekasi-East Jakarta Airport selected location.

It is a huge free obstacle flat field, without relevant slope gradients and the terrain is not edified yet. It is an exceptional location due to its huge amount of terrain available where companies could settle down taking advantage of the airport proximity, low terrain costs and direct connection with the down town. There is enough space to become also a logistic distribution centre of the island and Indonesia.

Finally, as it is an almost virgin land, communication is limited. Therefore, the solution is easy. The present Jakarta motorway will be extended. As it is shown on Fig. 1.1.1 indicated with a discontinuous line, there will be two connections between the current and the new highway.

Connection between airports will be achieved thanks to this new built highway. It will take 40min from door to door. Connection network of free-busses between both airports will make transfers safe and easy. There will be also available buses to and from the city centre, at low prices. During rush hours, a specific way will be delimited only for airport bus transfers.

1.1.2 Current traffic

The starting point has been Soekarno-Hatta Airport. As it can be seen on fig.1.1.2, currently Soekarno-Hatta Airport is handling volumes of passengers around 50 million passengers by year.

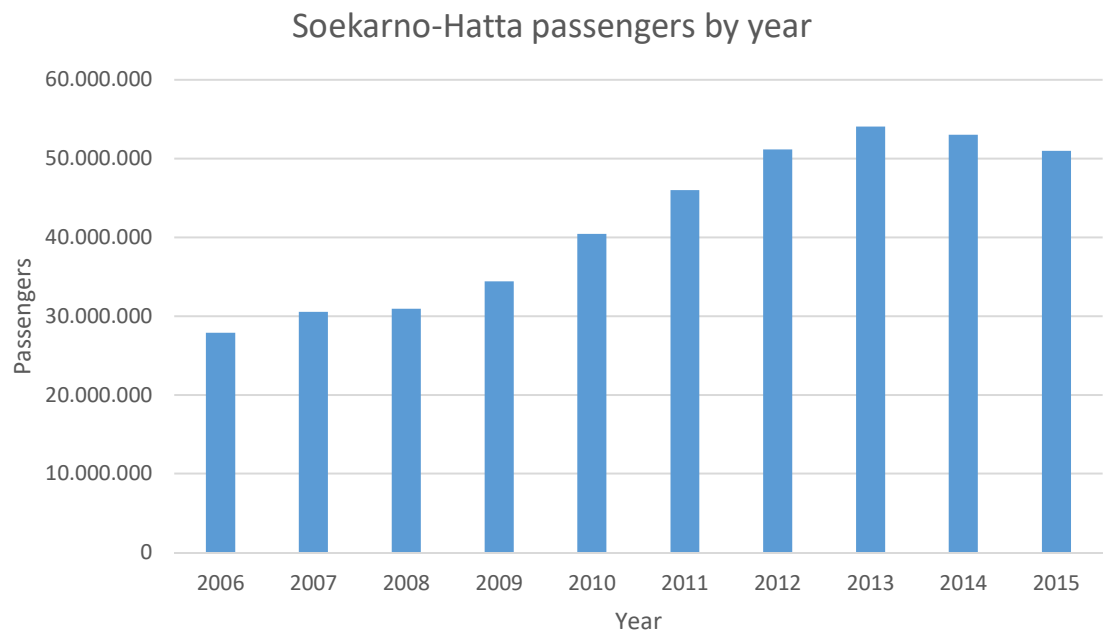


Figure 1.1.2: Soekarno-Hatta International Airport passengers by years

Operations on a mean day have the following pattern:

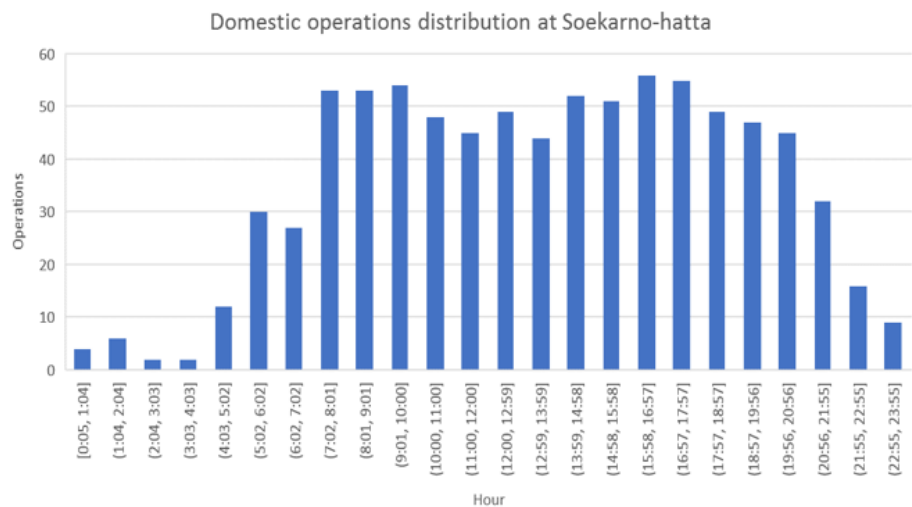


Figure 1.1.3: Soekarno-Hatta International Airport domestic flights distribution on busy day.

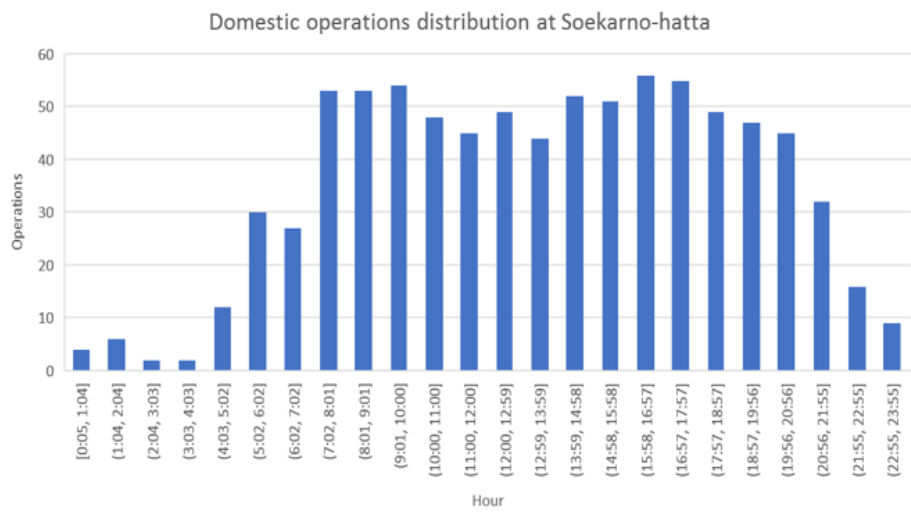


Figure 1.1.4: Soekarno-Hatta International Airport domestic flights distribution on busy day.

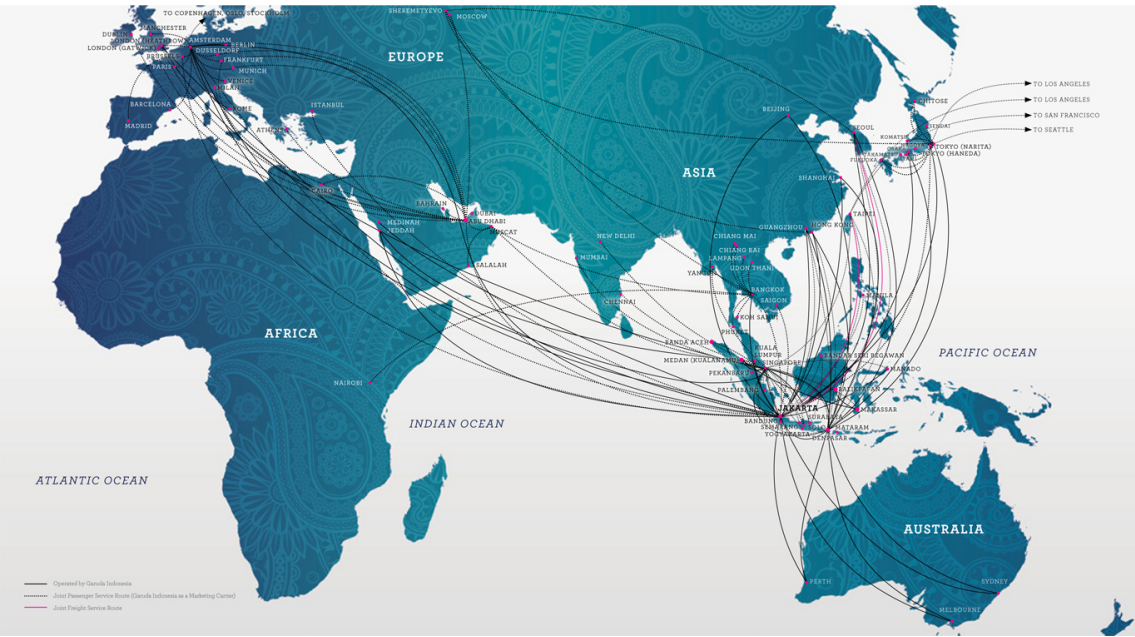


Figure 1.1.5: Soekarno-Hatta International Airport routes

1.1.3 Occupation factor

1.2 Reference aircraft

Hola



1.2.1 Aircraft type

1.2.2 Conclusions

1.3 Forecast computation

In order to do a realistic study for the new Bekasi-East airport traffic, it is previously established the Soekarno-Hatta International Airport (CGK) as the reference airport for the future operations prevision. According to one of the IATA main recommended methods for the elaboration of traffic previsions, data from historical series of CGK traffic has been used so as to be able to extrapolate the study horizons of the airport to be designed.

In order to do this, it is necessary to calculate the variation tendency

Before starting the study of passenger and operation demands, some important aspects will be taken into account:

- The airport to be projected will absorb nearly the 40% of CGK's current traffic, which corresponds to the percentage of delayed flights due to congestion.
- The growth tendencies, concretely the Compound Annual Growth Rate (CAGR), has been calculated using the data corresponding to the five more recent years.
- The prediction of passengers and operations have been calculated using three possible scenario.
 - Neutral scenario: The growth is constant along time
 - Optimistic scenario: The growth is constant along time but in 2025 is multiplied by a factor of 1,5 due to, for example, a boom of tourism in the city.
 - Pessimistic scenario: The growth is constant along time but in 2025 is divided by a factor of 2 due to, for example, a period of time with adverse atmospheric phenomena.

In addition, both the airlines as well as the percentage of operations absorbed from CGK are detailed in the following table:



AIRLINES	% OPERATIONS
Garuda	31.62
Citilink	7.11
Emirates	0.35
Etihad	0.44
Qatar	0.53
Total	40.05

Table 1.3.1: Airlines absorbed and operation percentages from CGK.

1.3.1 Passenger prediction

1.3.2 Operations prediction

1.3.3 Flights on standard day



2 | Terminal building distribution

2.1 Basic dimensions of the terminal building

2.2 Surface distribution

The terminal building interiors will be distributed according to the FAA criteria. This method has been chosen because it differentiates between domestic and international passenger flows, which are very well defined at this airport.

In order to manage and distribute the space available, the forecasted traffic predicted in the prognosis is to be used.

In first place, as shown in table ??, the surface corresponding to domestic traffic is distributed. According to prognosis data, the number of domestic passengers at design hour will be of 4850.

Surface	% out of total	m2/pax	m2 total
Departures	0.0435	0.609	2953.65
Arrivals	0.0435	0.609	2953.65
Waiting lobby	0.0739	1.035	5019.75
Restrooms	0.013	0.183	887.55
Kitchens	0.0652	0.913	4428.05
Restaurants	0.0652	0.913	4428.05
Offices	0.1957	2.739	13284.15
Other	0.0217	0.304	1474.4
Circulation	0.4783	6.696	32475.6
TOTAL			67904.85

Table 2.2.1: Estimated surfaces according to FAA (domestic flights).

In second place, as shown in table ??, the surface corresponding to international traffic is distributed. According to prognosis data, the number of international passenger at design



hour will be of 3168.

Surface	% out of total	m2/pax	m2 total
Departures	0.0435	0.609	2953.65
Arrivals	0.0435	0.609	2953.65
Waiting lobby	0.0739	1.035	5019.75
Restrooms	0.013	0.183	887.55
Kitchens	0.0652	0.913	4428.05
Offices	0.1957	2.739	13284.15
Other	0.0217	0.304	1474.4
General circulation	0.307	6.145	19467.36
Immigration	0.042	0.838	2654.78
Customs	0.084	1.676	5309.57
Health	0.028	0.559	1770.91
Other checkpoints	0.006	0.112	354.816
Circulation	0.198	3.966	12564.28
TOTAL			63363.17

Table 2.2.2: Estimated surfaces according to FAA (international flights).

Nevertheless, due to our airport structure and preliminary design, some of these areas are going to be shared between domestic and international passengers. This will allow to tighten the space and reduce the extension of the terminal building, which will be too extense for the number of passengers at design hour.

Therefore, the final dimensioning of the airport will be as follows, shown in table ??:

General (shared)	m2	Domestic	m2	International	m2
Departures	4725.56	Waiting lobby	5019.75	Immigration	2654.78
Arrivals	4724.56	Circulation	32475.6	Customs	5309.57
Restaurants	7082.83			Health	1770.91
Offices	21248.50			Other checkpoints	354.81
Other	2358.27			Circulation	12562.3
Restrooms	1419.77			General circulation	19456.36
Kitchens	7082.83			Waiting lobby	3009.60
TOTAL	48641.34		37495.35		45131.33

Table 2.2.3: Total surface distribution of terminal building.

The total surface of the terminal building area, dedicated to passengers and airport management is of 131267 m².



3 | Structural typology description

3.1 Foundation

3.2 Vertical elements

3.3 Forge



4 | Indoor paving

4.1 Typology

4.2 Floor covering

4.2.1 Structural base

4.2.2 Intermediate layers without buttress function

4.2.3 Leveling layer

4.2.4 Grip layer

4.3 Design

4.4 Superficial layer

4.4.1 Common areas paving

4.4.2 Stairways

4.4.3 Restroom paving

4.4.4 Offices paving

4.4.5 Automatic baggage handling system paving



5 | Facade

5.1 Front and back facade

5.1.1 Requirements and adopted solution

5.1.2 Glass

5.1.3 Spider system with steel pillars

5.1.4 Steel and concrete mixed columns

5.2 Lateral facade

5.2.1 Facade (prefabricated concrete)

5.3 Other elements

5.3.1 Main door and other sliding doors

5.3.2 Access bridges

5.3.3 Emergency doors

5.3.4 Automatic baggage handling system doors



6 | Building cover

6.1 Adopted solution

6.2 Shape and inclination of the building cover

6.3 Used materials

6.4 Sewer system



7 | Indoor closures

7.1 Walls

7.2 Doors

7.2.1 Baggage claim hall doors

7.2.2 Office access and automatic baggage handling system access doors



8 | Fire prevention regulations

8.1 Fire prevention regulations and chosen materials

8.1.1 Building elements

8.1.2 Materials



9 | Bibliography