

$T1 = R[A] \ R[B] \ W[A] \ C1$
 $T2 = W[D] \ R[B] \ W[B] \ C2$
 $T3 = R[D] \ W[D] \ C3$


1.1) $H_{T1T2T3} = R1[A] \ X2[D] \ W2[D] \ R3[D] \ R1[B] \ R2[B] \ X3[D] \ W3[D] \ WAIT \ X1[A] \ W1[A] \ X2[B] \ U1 \ C1 \ U2 \ C2 \ X3[D] \ W3[D] \ U3 \ C3$

Змінна	Встановлене блокування	Запит на блокування
A	X1	
D	X2	X3
B	X2	

1.2) $H_{T1T2T3} = S1[A] \ R1[A] \ X2[D] \ W2[D] \ S3[D] \ WAIT \ S1[B] \ R1[B] \ S2[B] \ WAIT \ X3[D] \ WAIT \ X3[D] \ WAIT \ X1[A] \ W1[A] \ X2[B] \ WAIT \ X3[D] \ WAIT \ U1 \ C1 \ U2 \ S2 \ R2[B] \ X2[B] \ W2[B] \ C2 \ U3 \ S3[D] \ R3[D] \ X3[D] \ W3[D] \ C3$

Змінна	Встановлення блокування	Запит на блокування
A	S1 X1	
D	X2	S3 X3
B	S1	S2 X2

1.3)
 1.

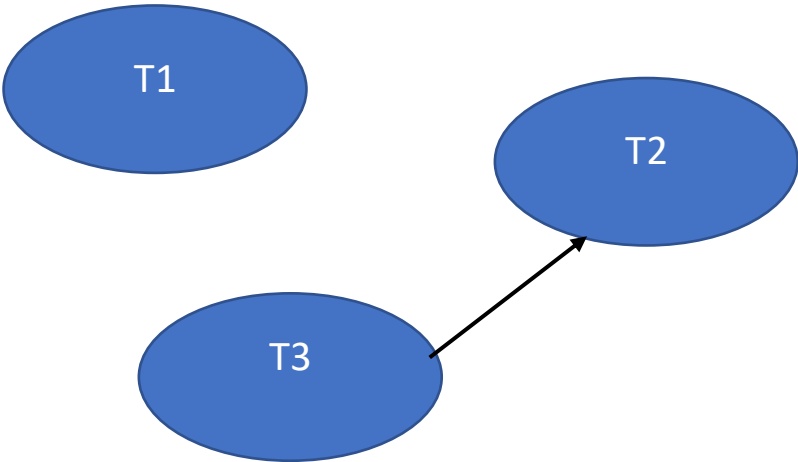

2.

