

Q. is it LR
 LR(0) or LR(1)
 LR(0) or LR(1)

$$\text{First}(S) = \text{First}(A) = \{a\}$$

$$\text{First}(B) = \{b\}$$

$$0. S' \rightarrow S \quad I_0 = \text{closure}([S' \rightarrow \cdot S, \$]) =$$

$$1. S \rightarrow AB \quad \{ [S' \rightarrow \cdot S, \$],$$

$$2. A \rightarrow aA \quad [S \rightarrow \cdot AB, \$], [A \rightarrow \cdot aA, b]$$

$$3. A \rightarrow a \quad [A \rightarrow \cdot aA, b], [A \rightarrow a, b]$$

$$4. B \rightarrow b \quad I_1 = \text{closure}(\text{goto}(I_0, S)) =$$

$$\{ [S' \rightarrow S \cdot, \$] \}$$

$$I_2 = \text{goto}(I_0, A) = \{ [S \rightarrow A \cdot B, \$],$$

$$[B \rightarrow \cdot b, \$] \}$$

$$I_3 = \text{goto}(I_0, a) = \{ [A \rightarrow a \cdot A, b],$$

$$[A \rightarrow a \cdot, b], [A \rightarrow \cdot aA, b], [A \rightarrow a, b] \}$$

$$I_4 = \text{goto}(I_2, B) = \{ [S \rightarrow AB \cdot, \$] \}$$

$$I_5 = \text{goto}(I_2, b) = \{ [B \rightarrow b \cdot, \$] \}$$

$$I_6 = \text{goto}(I_3, A) = \{ [A \rightarrow aA \cdot, b] \}$$


$$I_7 = \text{goto}(I_3, a) = \{ [A \rightarrow a \cdot A, b], [A \rightarrow a \cdot, b],$$

$$[A \rightarrow aA, b], [A \rightarrow \cdot a, b] \} = I_3$$

$$I_8 = \text{goto}(I_7, A) = \{ [A \rightarrow aA \cdot, b] \} = I_6$$

$I_4 \rightarrow \text{goto}(I_7, a) = \{ [A \rightarrow a.A, b], [A \rightarrow a., b], [A \rightarrow .a, b], [A \rightarrow .aA, b] \}$

I_3

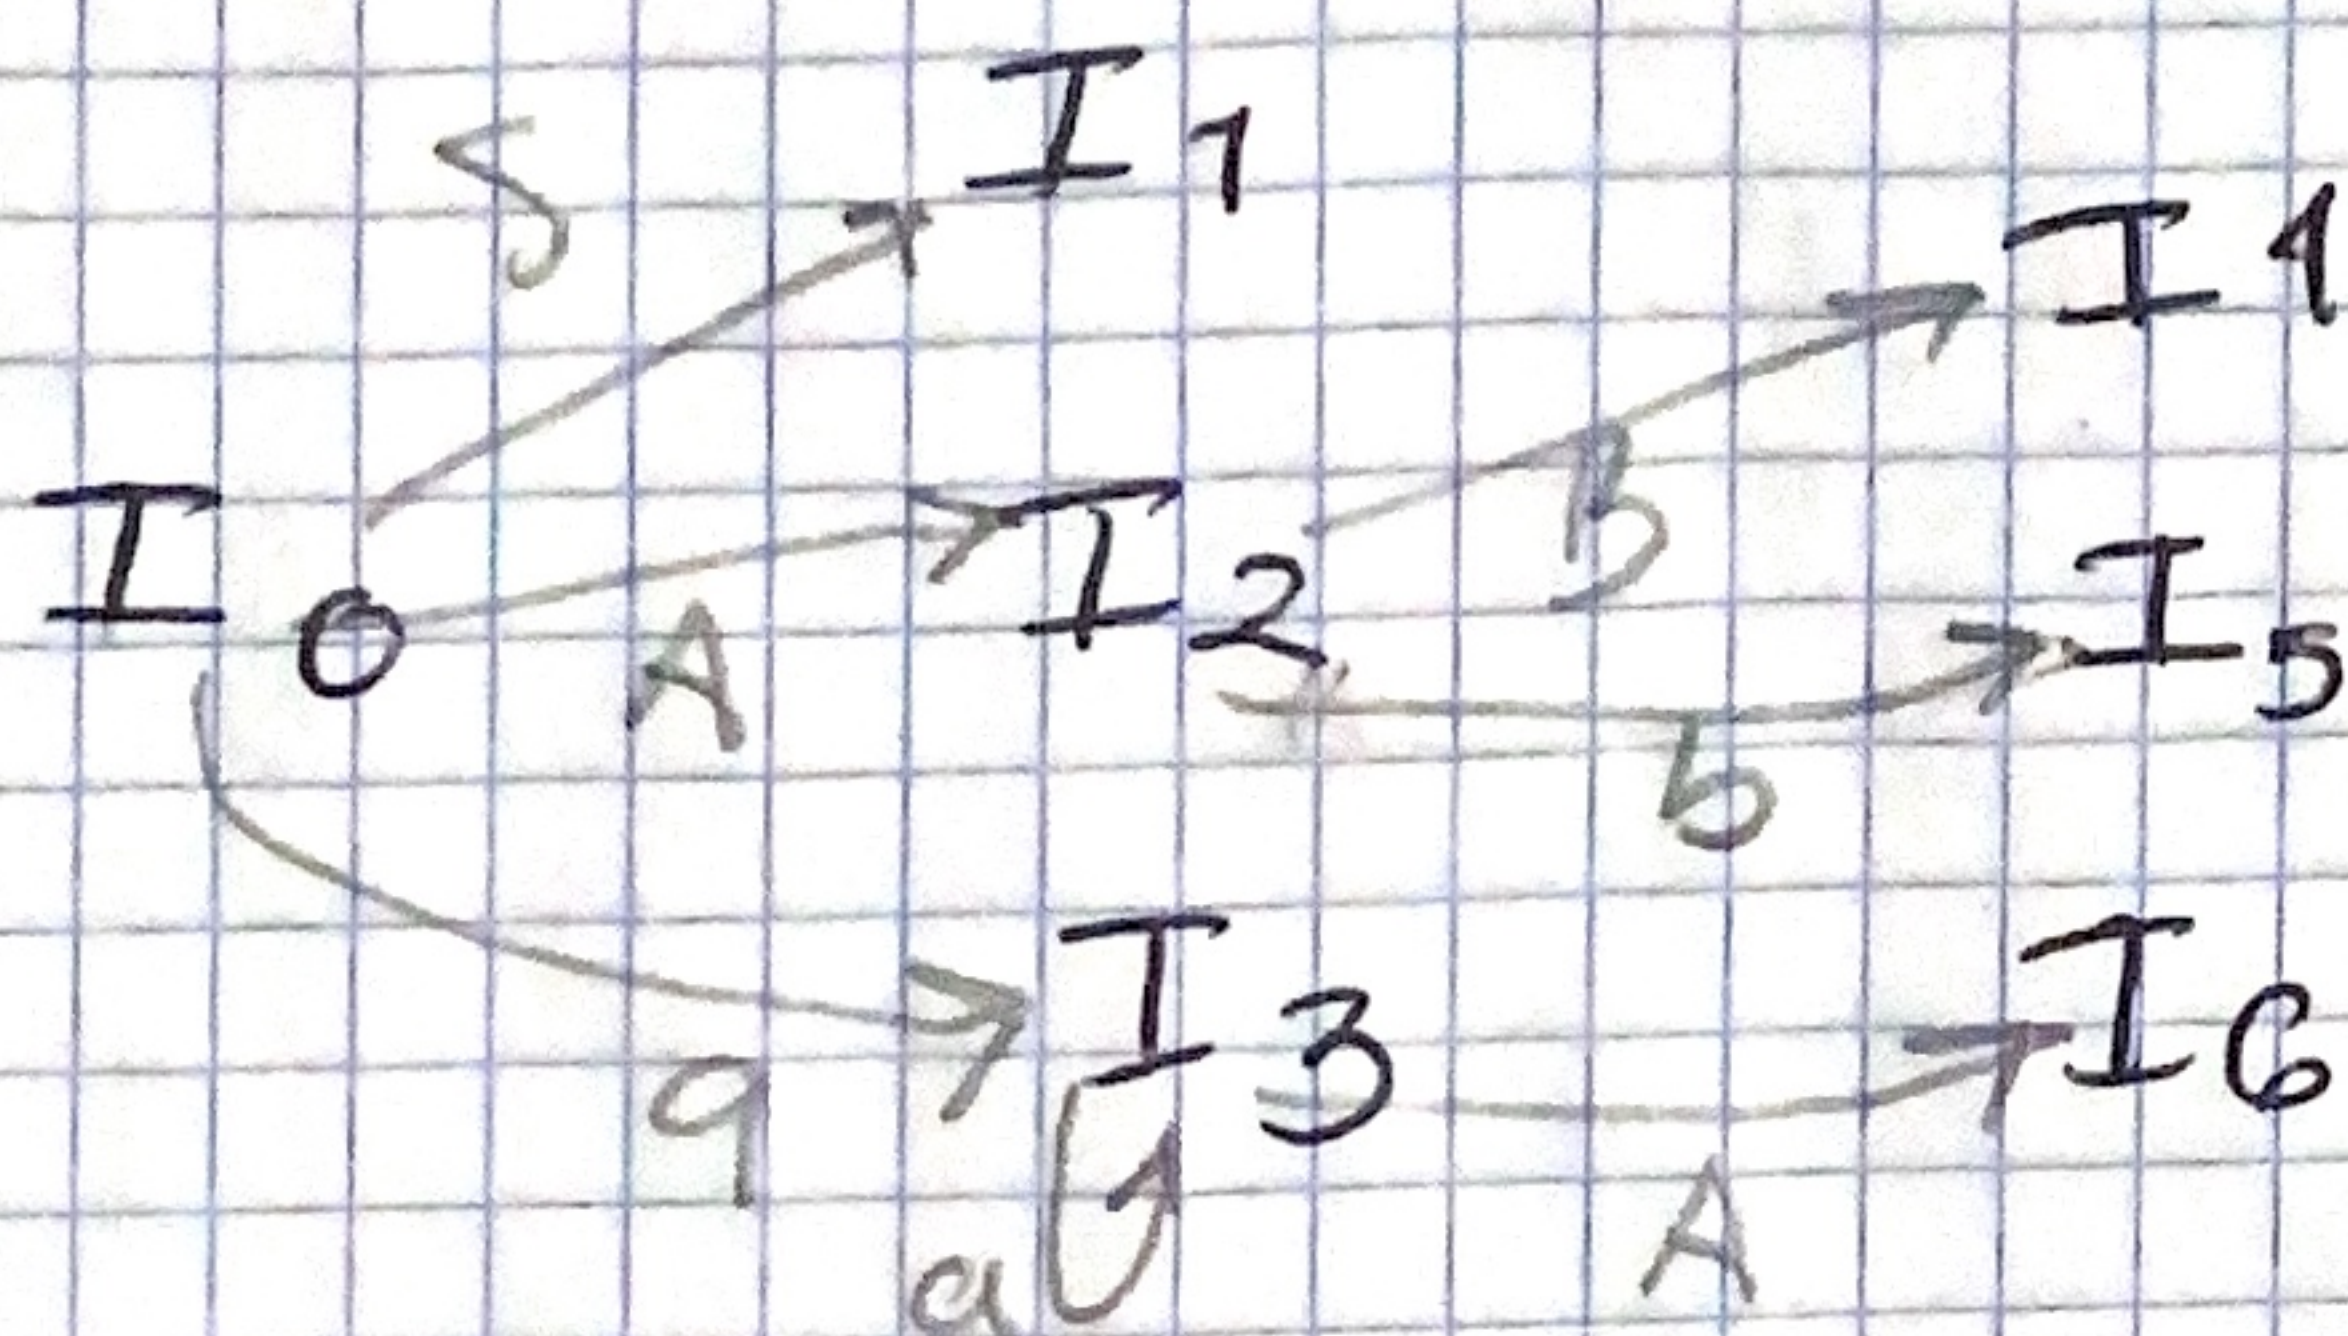

Est. Símbolos Buffer Acc.

$\emptyset$	$\emptyset$	ab\$	s3
$\emptyset$	a	b\$	63
02	A	b\$	s5
023	Ab	\$	64
024	AB	\$	61
01	S	\$	acc

	a	b	\$	A	B	S
I_0	s3			2		1
I_1				acc		
I_2		s5			4	
I_3	s3	63		6		
I_4			61			
I_5			64			
I_6		62				

Problemas con

- ab\$
- aab\$
- a\$