

SIMATS ENGINEERING ASSESSMENT TOOL 3

COURSE NAME: Theory of Computation

COURSE CODE: CSA13

COURSE OUTCOME COVERED

CO2: Design Finite Automata DFA, NFA, ϵ -NFA and demonstrate their equivalence for recognizing regular languages. (BL:3)

Assessment Tool Weightage: 20%

QUESTIONS: 5

Total Marks:20

Duration : 1 Hour

Scenario Based

Code of Conduct:


I Deepak V-192411021 (Name / Reg No) certify that this submission is my original work and that I have adhered to the guidelines specified for this assessment.

I understand that any violation of academic integrity rules will result in disciplinary action.

Signature of the student: Deepak

SIMATS ENGINEERING ASSESSMENT TOOL

1. Given a DFA used for validating a specific PIN pattern bbbc, bca, c, ca, caaaaa minimize the DFA and explain how state reduction improves performance and efficiency in embedded systems
2. Demonstrate how a given finite automaton can be converted into a regular expression

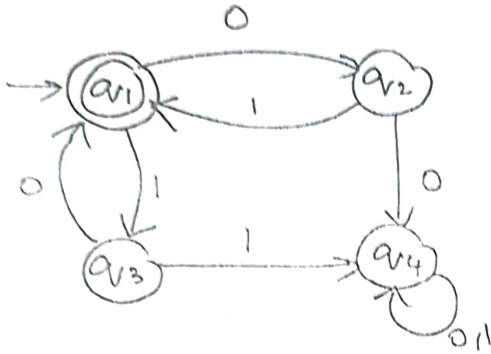

3. Consider the following grammar

$S \rightarrow aSc | T | U | e$

$T \rightarrow bTc | e$

$U \rightarrow aUb | e$

- A} What is the language defined by the grammar?
- B} Give the derivation tree for the word aaabbc
- C Grammar is Ambiguous if there exists two distinct derivations for a word. Is the above grammar ambiguous? Justify.

4. I) Show that if L_1 and L_2 are regular then $(L_1 + L_2)$ also regular
 ii) Is the language $\{a^p \mid p \text{ is prime}\}$ regular? Justify

DFA for PIN Patterns:

Given Valid PIN Patterns:

$\{ bbbcc, bca, c, cccaaa \}$

Alphabet:

$\Sigma = \{ a, b, c \}$

A prefix DFA can be constructed first

Minimized States:

$\{ q_{bbb}, q_{bca}, q_{ccaaa}, q_{c}, q_{ccaaa} \}$

$A = \{ q_0 \} \rightarrow \text{initial}, B = \{ q_b \}, C = \{ q_{bb} \}, D = \{ q_{bbb} \}$

$E = \{ q_{bc}, q_{ccaaa} \}, F = \{ q_c \}, G = \{ q_{ca} \}, H = \{ q_{caa} \}$

$I = \{ q_{caac} \}, J = \{ q_{bbcc}, q_{bca}, q_{ccaaa} \}$ final

$x \rightarrow \text{dead state}$

State \ IP	a	b	c
$\rightarrow A$	X	B	F
B	X	C	E
C	X	D	X
D	X	X	J
E	J	X	X
F	G	X	X
G	I	X	X
H	I	X	X
I	E	X	X
J	X	X	X
X	X	X	X

2) Finite Automaton $\rightarrow$ Regular Expression.
From the given Automaton:

(A) to

- $\rightarrow q_1$ is initial and final state
 - $\rightarrow q_4$ is also a final state
 - $\rightarrow q_1$ has a loop on 0
 - $\rightarrow$ from q_1 , I can reach two q_4 .
 - $\rightarrow q_4$ loops on both 0 and 1.
- paths to q_4 are:

00011

Therefore,

$$0^* + 0^*1(0+1)^*(0+1)^*$$

3) Grammar:

Given,

$$S \rightarrow aSa \mid T \mid U \mid \epsilon$$

$$T \rightarrow abT \mid \epsilon$$

$$U \rightarrow aUb \mid \epsilon$$

A) Language:

$$T \rightarrow l^m \epsilon^m$$

$$U \rightarrow a^m b^m$$

$\therefore S$ generates $a^i b^j \epsilon^{i+j} U a^{i+j} b^{i+j}$
where $i, j \geq 0$.

B) Derivation Tree for $aabb\epsilon$:


$$S \rightarrow aS\epsilon, S \rightarrow U$$

$$S \rightarrow aU\epsilon, U \rightarrow aUb$$

$$S \rightarrow aaUb\epsilon, U \rightarrow aUb$$

$$S \rightarrow \cancel{aaabbb\epsilon}, U \rightarrow \epsilon$$

$$S \rightarrow aabb\epsilon$$

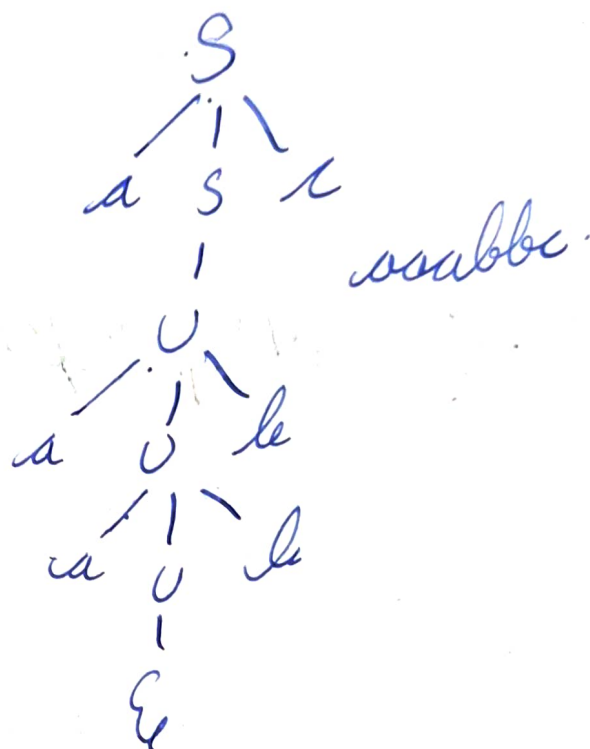

C) Ambiguity:

$$S \rightarrow \epsilon$$

$$S \rightarrow T \rightarrow \epsilon$$

$$S \rightarrow U \rightarrow \epsilon$$


$\therefore$ Grammar is Ambiguous

4) Regular Languages:

1) Given $L_1 + L_2$ is Regular:

Let L_1 and L_2 be regular.

Their automata can be combined using new initial state

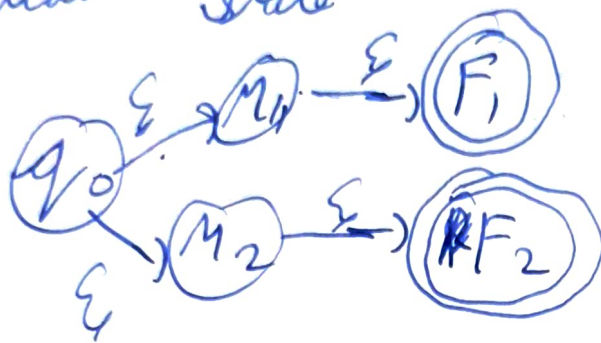

The resulting NFA accepts

$L_1 \cup L_2$

$\therefore L_1 \cup L_2$ is Regular

2) is $\{a^p \mid p \text{ is prime}\}$ Regular?

Assume it is regular with pumping length n .

Choose a prime $p > n$:

$$w = a^p$$

Let $y = a^k$, $k > 0$

pump y $p+1$ times: $|xy^{p+1}z| = p(1+k)$

This is composite, not prime, so by contradiction

$\{a^p \mid p \text{ is prime}\}$ is not regular

SIMATS ENGINEERING ASSESSMENT TOOL

RUBRICS FOR CALCULATION

Criteria	Weightage	Level 4 - Exemplary (5 Marks)	Level 3 - Proficient (4 Marks)	Level 2 - Developing (2-3 Marks)	Level 1 - Beginning (0-1 Mark)
Conceptual Understanding	30	Demonstrates clear and complete understanding of the concept	Good understanding with minor gaps	Basic understanding with some misconceptions	Poor or incorrect understanding
Accuracy of Answer	25	Completely correct answer with no errors	Mostly correct with minor errors	Partially correct with noticeable errors	Incorrect or irrelevant answer
Application of Knowledge	20	Correctly applies concepts to solve the question/problem	Applies concepts with minor mistakes	Limited or partially correct application	No or incorrect application
Completeness of Response	15	Covers all required parts of the question	Covers most parts with minor omissions	Covers only some parts	Incomplete or missing response
Clarity & Presentation	10	Clear, concise, and well-organized answer	Understandable with minor issues	Somewhat unclear or poorly structured	Difficult to understand

91/100