

## GATE 10th Feb 2024 S2

Candidate ID	CS24S62022381
Candidate Name	RANA ARYAN RAJESHKUMAR
Test Center Name	iON Digital Zone iDZ Unn
Test Date	10/02/2024
Test Time	2:30 PM - 5:30 PM
Subject	CS2 COMPUTER SCIENCE AND INFORMATION TECHNOLOGY

Section : General Aptitude

- Q.1** Sequence the following sentences in a coherent passage.

P: This fortuitous geological event generated a colossal amount of energy and heat that resulted in the rocks rising to an average height of 4 km across the contact zone.

Q: Thus, the geophysicists tend to think of the Himalayas as an active geological event rather than as a static geological feature.

R: The natural process of the cooling of this massive edifice absorbed large quantities of atmospheric carbon dioxide, altering the earth's atmosphere and making it better suited for life.

S: Many millennia ago, a breakaway chunk of bedrock from the Antarctic Plate collided with the massive Eurasian Plate.

**Options**

- A. SRPQ
- B. QPSR
- C. SPRQ
- D. QSPR

Question Type : MCQ  
 Question ID : 6420084968  
 Status : Answered  
 Chosen Option : A

**Q.2**

In the sequence 6, 9, 14,  $x$ , 30, 41, a possible value of  $x$  is

**Options**

- A. 25
- B. 20
- C. 21
- D. 18

Question Type : MCQ  
Question ID : 6420084967  
Status : Answered  
Chosen Option : C

**Q.3**

A cube is to be cut into 8 pieces of equal size and shape. Here, each cut should be straight and it should not stop till it reaches the other end of the cube.

The minimum number of such cuts required is

**Options**

- A. 3
- B. 8
- C. 7
- D. 4

Question Type : MCQ  
Question ID : 6420084971  
Status : Answered  
Chosen Option : C

**Q.4**

A person sold two different items at the same price. He made 10% profit in one item, and 10% loss in the other item. In selling these two items, the person made a total of

**Options**

- A. 2% loss
- B. 2% profit
- C. 1% profit
- D. 1% loss

Question Type : MCQ  
Question ID : 6420084969  
Status : Answered  
Chosen Option : B

**Q.5**

For positive non-zero real variables  $x$  and  $y$ , if

$$\ln\left(\frac{x+y}{2}\right) = \frac{1}{2}[\ln(x) + \ln(y)]$$

then, the value of  $\frac{x}{y} + \frac{y}{x}$  is

**Options**

- A. 4
- B. 1/2
- C. 1
- D. 2

Question Type : **MCQ**

Question ID : **6420084966**

Status : **Answered**

Chosen Option : **B**

**Q.6**

In an engineering college of 10,000 students, 1,500 like neither their core branches nor other branches. The number of students who like their core branches is  $1/4^{\text{th}}$  of the number of students who like other branches. The number of students who like both their core and other branches is 500.

The number of students who like their core branches is

**Options**

- A. 1,800
- B. 1,500
- C. 3,500
- D. 1,600

Question Type : **MCQ**

Question ID : **6420084965**

Status : **Answered**

Chosen Option : **B**

**Q.7**

In the  $4 \times 4$  array shown below, each cell of the first three rows has either a cross (X) or a number.

1	X	4	3
X	5	5	4
3	X	6	X

The number in a cell represents the count of the immediate neighboring cells (left, right, top, bottom, diagonals) NOT having a cross (X). Given that the last row has no crosses (X), the sum of the four numbers to be filled in the last row is



**Options**

- A. 12
- B. 9
- C. 10
- D. 11

Question Type : MCQ  
Question ID : 6420084972  
Status : Not Answered  
Chosen Option : --

**Q.8**

The pie charts depict the shares of various power generation technologies in the total electricity generation of a country for the years 2007 and 2023.

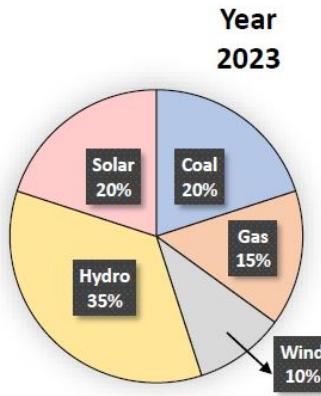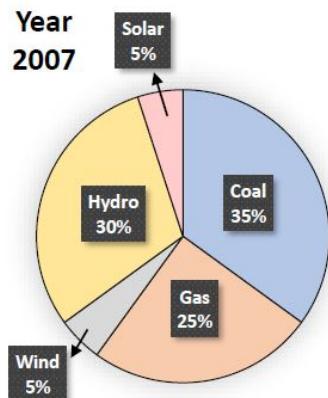

The renewable sources of electricity generation consist of Hydro, Solar and Wind. Assuming that the total electricity generated remains the same from 2007 to 2023, what is the percentage increase in the share of the renewable sources of electricity generation over this period?

**Options**

- A. 50%
- B. 25%
- C. 62.5%
- D. 77.5%

Question Type : MCQ  
 Question ID : 6420084970  
 Status : Answered  
 Chosen Option : C

**Q.9**

If '→' denotes increasing order of intensity, then the meaning of the words

[walk → jog → sprint] is analogous to [bothered → \_\_\_\_\_ → daunted].

Which one of the given options is appropriate to fill the blank?

**Options**

- A. fazed
- B. phrased
- C. phased
- D. fused

Question Type : MCQ  
 Question ID : 6420084963  
 Status : Answered  
 Chosen Option : C

**Q.10**

Two wizards try to create a spell using all the four elements, *water*, *air*, *fire*, and *earth*. For this, they decide to mix all these elements in all possible orders. They also decide to work independently. After trying all possible combination of elements, they conclude that the spell does not work.

How many attempts does each wizard make before coming to this conclusion, independently?

**Options**

- A. 16
- B. 24
- C. 48
- D. 12

Question Type : **MCQ**  
Question ID : **6420084964**  
Status : **Answered**  
Chosen Option : **B**

Section : CS2 Computer Science and Information Technology

**Q.1**

Which of the following fields of an IP header is/are *always* modified by any router before it forwards the IP packet?

**Options**

- A. Source IP Address
- B. Protocol
- C. Header Checksum
- D. Time to Live (TTL)

Question Type : **MSQ**  
Question ID : **6420084994**  
Status : **Answered**  
Chosen Option : **C**

**Q.2**

When six unbiased dice are rolled simultaneously, the probability of getting all distinct numbers (*i.e.*, 1, 2, 3, 4, 5, and 6) is

**Options**

A.  $\frac{11}{324}$

B.  $\frac{5}{324}$

C.  $\frac{7}{324}$

D.  $\frac{1}{324}$

Question Type : **MCQ**

Question ID : **6420084980**

Status : **Not Attempted and  
Marked For Review**

Chosen Option : --

**Q.3**

Consider a process P running on a CPU. Which one or more of the following events will *always* trigger a context switch by the OS that results in process P moving to a non-running state (e.g., ready, blocked)?

**Options A.**

P tries to access a page that is in the swap space, triggering a page fault

B. A timer interrupt is raised by the hardware

C.

P makes a blocking system call to read a block of data from the disk

D.

An interrupt is raised by the disk to deliver data requested by some other process

Question Type : **MSQ**

Question ID : **6420084987**

Status : **Answered**

Chosen Option : **A**

**Q.4**

In the context of owner and weak entity sets in the ER (Entity-Relationship) data model, which one of the following statements is TRUE?

**Options A.**

The owner entity set MUST have total participation in the identifying relationship

B.

The weak entity set MUST have total participation in the identifying relationship

C.

Neither weak entity set nor owner entity set MUST have total participation in the identifying relationship

D.

Both weak and owner entity sets MUST have total participation in the identifying relationship

Question Type : MCQ

Question ID : 6420084982

Status : Answered

Chosen Option : D

**Q.5**

Let  $T(n)$  be the recurrence relation defined as follows:

$$T(0) = 1,$$

$$T(1) = 2, \text{ and}$$

$$T(n) = 5T(n - 1) - 6T(n - 2) \quad \text{for } n \geq 2$$

Which one of the following statements is TRUE?

**Options**

A.  $T(n) = \Theta(2^n)$

B.  $T(n) = \Theta(3^n)$

C.  $T(n) = \Theta(n2^n)$

D.  $T(n) = \Theta(n3^n)$

Question Type : MCQ

Question ID : 6420084977

Status : Answered

Chosen Option : C

**Q.6** An instruction format has the following structure:

Instruction Number: *Opcod destination reg, source reg-1, source reg-2*

Consider the following sequence of instructions to be executed in a pipelined processor:

I1: DIV R3, R1, R2

I2: SUB R5, R3, R4

I3: ADD R3, R5, R6

I4: MUL R7, R3, R8

Which of the following statements is/are TRUE?

**Options A.**

A. There is a WAR dependency on R3 between I1 and I3

B.

C. There is a RAW dependency on R3 between I1 and I2

D.

E. There is a WAW dependency on R3 between I3 and I4

F.

G. There is a RAW dependency on R3 between I2 and I3

Question Type : **MSQ**

Question ID : **6420084993**

Status : **Not Attempted and  
Marked For Review**

Chosen Option : --

**Q.7**

Which of the following file organizations is/are I/O efficient for the scan operation in DBMS?

**Options**

A. Heap

B. Unclustered hash index

C. Sorted

D. Unclustered tree index

Question Type : **MSQ**

Question ID : **6420084988**

Status : **Answered**

Chosen Option : **C**

**Q.8**

Node X has a TCP connection open to node Y. The packets from X to Y go through an intermediate IP router R. Ethernet switch S is the first switch on the network path between X and R. Consider a packet sent from X to Y over this connection.

Which of the following statements is/are TRUE about the destination IP and MAC addresses on this packet at the time it leaves X?

**Options**

- A. The destination MAC address is the MAC address of S
- B.
- C. The destination MAC address is the MAC address of Y
- D. The destination IP address is the IP address of Y
- D. The destination IP address is the IP address of R

Question Type : **MSQ**  
Question ID : **6420084985**  
Status : **Answered**  
Chosen Option : **C,D**

**Q.9**

Let  $A$  be the adjacency matrix of a simple undirected graph  $G$ . Suppose  $A$  is its own inverse. Which one of the following statements is *always* TRUE?

**Options**

- A. There is no such graph  $G$
- B.  $G$  is a cycle
- C.  $G$  is a complete graph
- D.  $G$  is a perfect matching

Question Type : **MCQ**  
Question ID : **6420084979**  
Status : **Answered**  
Chosen Option : **C**

**Q.10**

Which of the following statements about the Two Phase Locking (2PL) protocol is/are TRUE?

**Options A.**

With 2PL, a transaction always locks the data item being read or written just before every operation and always releases the lock just after the operation

B. 2PL permits only serializable schedules

C. A deadlock is possible with 2PL

D.

With 2PL, once a lock is released on any data item inside a transaction, no more locks on any data item can be obtained inside that transaction

Question Type : **MSQ**

Question ID : **6420084989**

Status : **Answered**

Chosen Option : **A,B,C,D**

**Q.11**

Let  $A$  be an array containing integer values. The distance of  $A$  is defined as the minimum number of elements in  $A$  that must be replaced with another integer so that the resulting array is sorted in non-decreasing order. The distance of the array  $[2, 5, 3, 1, 4, 2, 6]$  is \_\_\_\_\_

Given --  
Answer :


Question Type : **NAT**

Question ID : **6420084997**

Status : **Not Attempted and  
Marked For Review**

**Q.12**

Which one of the following regular expressions is equivalent to the language accepted by the DFA given below?

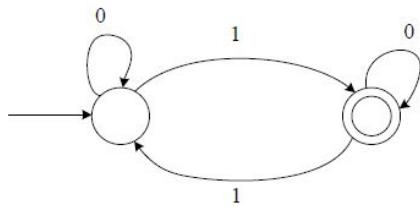**Options**

- A.  $0(1 + 0^*10^*1)^*0^*$
- B.  $0^*1(0 + 10^*1)^*$
- C.  $0^*1(010^*1)^*0^*$
- D.  $0^*(10^*11)^*0^*$

Question Type : MCQ  
 Question ID : 6420084984  
 Status : Answered  
 Chosen Option : B

**Q.13**

Which of the following statements about IPv4 fragmentation is/are TRUE?

**Options A.**

The reassembly of fragments is performed at all intermediate routers along the path from the source to the destination

- B.
  - C.
  - D.
- The fragmentation of an IP datagram is performed *only* at the source of the datagram
- The reassembly of fragments is performed *only* at the destination of the datagram
- The fragmentation of an IP datagram is performed at any IP router which finds that the size of the datagram to be transmitted exceeds the MTU

Question Type : MSQ  
 Question ID : 6420084990  
 Status : Answered  
 Chosen Option : A,B,D

**Q.14** Let  $p$  and  $q$  be the following propositions:

$p$ : Fail grade can be given.

$q$ : Student scores more than 50% marks.

Consider the statement: "Fail grade cannot be given when student scores more than 50% marks."

Which one of the following is the CORRECT representation of the above statement in propositional logic?

Options

- A.  $p \rightarrow q$
- B.  $q \rightarrow \neg p$
- C.  $\neg p \rightarrow q$
- D.  $q \rightarrow p$

Question Type : MCQ  
 Question ID : 6420084974  
 Status : Answered  
 Chosen Option : C

**Q.15**

Consider the following two sets:

**Set X**

- P. Lexical Analyzer
- Q. Syntax Analyzer
- R. Intermediate Code Generator
- S. Code Optimizer

**Set Y**

- 1. Abstract Syntax Tree
- 2. Token
- 3. Parse Tree
- 4. Constant Folding

Which one of the following options is the CORRECT match from **Set X** to **Set Y**?

Options

- A. P – 2; Q – 3; R – 1; S – 4
- B. P – 4; Q – 3; R – 2; S – 1
- C. P – 4; Q – 1; R – 3; S – 2
- D. P – 2; Q – 1; R – 3; S – 4

Question Type : MCQ  
 Question ID : 6420084983  
 Status : Answered  
 Chosen Option : A

**Q.16**

Which of the following statements is/are FALSE?

**Options A.**

An attribute grammar is a syntax-directed definition (SDD) in which the functions in the semantic rules have no side effects

B.

Synthesized attributes can be evaluated by a bottom-up parser as the input is parsed

C.

The attributes in a L-attributed definition cannot always be evaluated in a depth-first order

D.

All L-attributed definitions based on LR(1) grammar can be evaluated using a bottom-up parsing strategy

Question Type : **MSQ**Question ID : **6420084991**Status : **Answered**Chosen Option : **A,B,D****Q.17**

Consider a computer with a 4 MHz processor. Its DMA controller can transfer 8 bytes in 1 cycle from a device to main memory through cycle stealing at regular intervals. Which one of the following is the data transfer rate (*in bits per second*) of the DMA controller if 1% of the processor cycles are used for DMA?

**Options**

- A. 32,000
- B. 25,60,000
- C. 3,200
- D. 2,56,000

Question Type : **MCQ**Question ID : **6420084973**Status : **Not Attempted and  
Marked For Review**

Chosen Option : --

**Q.18**

Once the DBMS informs the user that a transaction has been successfully completed, its effect should persist even if the system crashes before all its changes are reflected on disk. This property is called

**Options**

- A. atomicity
- B. consistency
- C. isolation
- D. durability

Question Type : MCQ  
Question ID : 6420084981  
Status : Answered  
Chosen Option : D

**Q.19**

Which of the following tasks is/are the responsibility/responsibilities of the memory management unit (MMU) in a system with paging-based memory management?

**Options A.**

- Raise a trap when a process tries to write to a page marked with read-only permission in the page table
- B.
- Allocate a new page table for a newly created process
- C.
- Raise a trap when a virtual address is not found in the page table
- D.
- Translate a virtual address to a physical address using the page table

Question Type : MSQ  
Question ID : 6420084986  
Status : Answered  
Chosen Option : B,C,D

**Q.20**

For a Boolean variable  $x$ , which of the following statements is/are FALSE?

**Options**

- A.  $x + \bar{x} = 1$
- B.  $x \cdot x = 0$
- C.  $x \cdot 1 = x$
- D.  $x + 1 = x$

Question Type : **MSQ**  
Question ID : **6420084992**  
Status : **Answered**  
Chosen Option : **A,B**

**Q.21** Consider the following C function definition.

```
int fX(char *a) {  
    char *b = a;  
    while (*b)  
        b++;  
    return b - a; }
```

Which of the following statements is/are TRUE?

**Options A.**

Assuming a character pointer  $c$  is declared as  $\text{char } *c = "abcd"$  in  $\text{main}()$ ,  
the function call  $fX(c)$  will always return a value

- B.  
Assuming a character array  $c$  is declared as  $\text{char } c[] = "abcd"$  in  $\text{main}()$ ,  
the function call  $fX(c)$  will always return a value
  - C. The code of the function will not compile
  - D.
- The function call  $fX("abcd")$  will always return a value

Question Type : **MSQ**  
Question ID : **6420084995**  
Status : **Answered**  
Chosen Option : **A,D**

**Q.22**

Consider the following C program. Assume parameters to a function are evaluated from *right to left*.

```
#include <stdio.h>

int g(int p) { printf("%d", p); return p; }
int h(int q) { printf("%d", q); return q; }

void f(int x, int y) {
    g(x);
    h(y);
}

int main() {
    f(g(10),h(20));
}
```

Which one of the following options is the CORRECT output of the above C program?

**Options**

- A. 10201020
- B. 20101020
- C. 10202010
- D. 20102010

Question Type : MCQ

Question ID : 6420084975

Status : Not Attempted and  
Marked For Review

Chosen Option : --

**Q.23**

Let  $f(x)$  be a continuous function from  $\mathbb{R}$  to  $\mathbb{R}$  such that

$$f(x) = 1 - f(2 - x)$$

Which one of the following options is the CORRECT value of  $\int_0^2 f(x)dx$  ?

**Options**

- A. -1
- B. 0
- C. 1
- D. 2

Question Type : MCQ

Question ID : 6420084978

Status : Answered

Chosen Option : B

**Q.24**

Let  $P$  be the partial order defined on the set  $\{1,2,3,4\}$  as follows

$$P = \{(x,x) \mid x \in \{1,2,3,4\}\} \cup \{(1,2), (3,2), (3,4)\}$$

The number of total orders on  $\{1,2,3,4\}$  that contain  $P$  is \_\_\_\_\_

Given 19

Answer :

Question Type : NAT

Question ID : 6420084996

Status : Answered

**Q.25**

The format of a single-precision floating-point number as per the IEEE 754 standard is:

Sign	Exponent	Mantissa
(1bit)	(8 bits)	(23 bits)

Choose the largest floating-point number among the following options.

Options A.

Sign	Exponent	Mantissa
------	----------	----------

0	0111 1111	0000 0000 0000 0000 0000 000
---	-----------	------------------------------

B.

Sign	Exponent	Mantissa
------	----------	----------

0	0111 1111	1111 1111 1111 1111 1111 1111 111
---	-----------	-----------------------------------

C.

Sign	Exponent	Mantissa
------	----------	----------

0	1111 1111	1111 1111 1111 1111 1111 1111 111
---	-----------	-----------------------------------

D.

Sign	Exponent	Mantissa
------	----------	----------

0	1111 1110	1111 1111 1111 1111 1111 1111 111
---	-----------	-----------------------------------

Question Type : MCQ

Question ID : 6420084976

Status : Not Attempted and  
Marked For Review

Chosen Option : --

**Q.26**

Let  $A$  be an  $n \times n$  matrix over the set of all real numbers  $\mathbb{R}$ . Let  $B$  be a matrix obtained from  $A$  by swapping two rows. Which of the following statements is/are TRUE?


**Options A.**

The determinant of  $B$  is the negative of the determinant of  $A$

- B. If  $A$  is invertible, then  $B$  is also invertible
- C. If the trace of  $A$  is zero, then the trace of  $B$  is also zero
- D. If  $A$  is symmetric, then  $B$  is also symmetric

Question Type : **MSQ**Question ID : **6420085009**Status : **Answered**Chosen Option : **B,C,D****Q.27**

Let  $S_1$  and  $S_2$  be two stacks.  $S_1$  has capacity of 4 elements.  $S_2$  has capacity of 2 elements.  $S_1$  already has 4 elements: 100, 200, 300, and 400, whereas  $S_2$  is empty, as shown below.

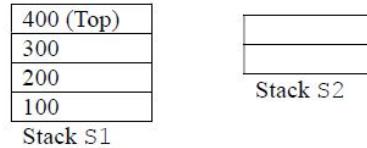

Only the following three operations are available:

**PushToS2:** Pop the top element from  $S_1$  and push it on  $S_2$ .

**PushToS1:** Pop the top element from  $S_2$  and push it on  $S_1$ .

**GenerateOutput:** Pop the top element from  $S_1$  and output it to the user.

Note that the pop operation is not allowed on an empty stack and the push operation is not allowed on a full stack.

Which of the following output sequences can be generated by using the above operations?


**Options**

- A. 300, 200, 400, 100
- B. 200, 300, 400, 100
- C. 100, 200, 400, 300
- D. 400, 200, 100, 300

Question Type : **MSQ**Question ID : **6420085010**Status : **Answered**Chosen Option : **A**

**Q.28**

The chromatic number of a graph is the minimum number of colours used in a *proper* colouring of the graph. The chromatic number of the following graph is \_\_\_\_\_

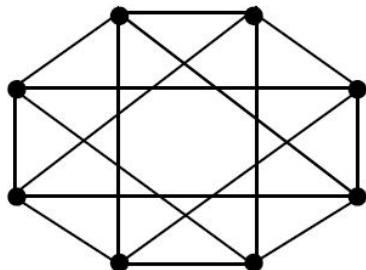

Given --

Answer :

Question Type : **NAT**Question ID : **6420085022**Status : **Not Attempted and  
Marked For Review****Q.29**

Consider a single processor system with four processes A, B, C, and D, represented as given below, where for each process the first value is its arrival time, and the second value is its CPU burst time.

A (0, 10), B (2, 6), C (4, 3), and D (6, 7).

Which one of the following options gives the average waiting times when preemptive Shortest Remaining Time First (SRTF) and Non-Preemptive Shortest Job First (NP-SJF) CPU scheduling algorithms are applied to the processes?

**Options**

- A. SRTF = 7, NP-SJF = 8.5
- B. SRTF = 6, NP-SJF = 7.5
- C. SRTF = 6, NP-SJF = 7
- D. SRTF = 7, NP-SJF = 7.5

Question Type : **MCQ**Question ID : **6420084999**Status : **Not Attempted and  
Marked For Review**

Chosen Option : --

**Q.30**

Let  $x$  and  $y$  be random variables, not necessarily independent, that take real values in the interval  $[0,1]$ . Let  $z = xy$  and let the mean values of  $x, y, z$  be  $\bar{x}, \bar{y}, \bar{z}$ , respectively. Which one of the following statements is TRUE?

**Options**

- A.  $\bar{z} \leq \bar{x}\bar{y}$
- B.  $\bar{z} = \bar{x}\bar{y}$
- C.  $\bar{z} \leq \bar{x}$
- D.  $\bar{z} \geq \bar{x}\bar{y}$

Question Type : MCQ

Question ID : 6420085006

Status : Not Attempted and  
Marked For Review

Chosen Option : --

**Q.31**

The relation schema, Person (pid, city), describes the city of residence for every person uniquely identified by pid. The following relational algebra operators are available: selection, projection, cross product, and rename.

To find the list of cities where at least 3 persons reside, using the above operators, the minimum number of cross product operations that must be used is

**Options**

- A. 3
- B. 4
- C. 2
- D. 1

Question Type : MCQ

Question ID : 6420085007

Status : Not Attempted and  
Marked For Review

Chosen Option : --

- Q.32** Consider the following context-free grammar where the start symbol is  $S$  and the set of terminals is  $\{a,b,c,d\}$ .

$$\begin{aligned} S &\rightarrow AaAb \mid BbBa \\ A &\rightarrow cS \mid \epsilon \\ B &\rightarrow dS \mid \epsilon \end{aligned}$$

The following is a partially-filled LL(1) parsing table.

	$a$	$b$	$c$	$d$	$\$$
$S$	$S \rightarrow AaAb$	$S \rightarrow BbBa$	(1)	(2)	
$A$	$A \rightarrow \epsilon$	(3)	$A \rightarrow cS$		
$B$	(4)	$B \rightarrow \epsilon$		$B \rightarrow dS$	

Which one of the following options represents the CORRECT combination for the numbered cells in the parsing table?

*Note: In the options, "blank" denotes that the corresponding cell is empty.*

**Options**

- A. (1)  $S \rightarrow BbBa$  (2)  $S \rightarrow AaAb$  (3) blank (4) blank
- B. (1)  $S \rightarrow AaAb$  (2)  $S \rightarrow BbBa$  (3)  $A \rightarrow \epsilon$  (4)  $B \rightarrow \epsilon$
- C. (1)  $S \rightarrow AaAb$  (2)  $S \rightarrow BbBa$  (3) blank (4) blank
- D. (1)  $S \rightarrow BbBa$  (2)  $S \rightarrow AaAb$  (3)  $A \rightarrow \epsilon$  (4)  $B \rightarrow \epsilon$

Question Type : MCQ  
 Question ID : 6420085002  
 Status : Answered  
 Chosen Option : D

**Q.33**

Let  $G$  be an undirected connected graph in which every edge has a positive integer weight. Suppose that every spanning tree in  $G$  has even weight. Which of the following statements is/are TRUE for every such graph  $G$  ?

**Options A.**

All edges in  $G$  have even weight OR all edges in  $G$  have odd weight

- B. In each cycle  $C$  in  $G$ , all edges in  $C$  have even weight
- C. All edges in  $G$  have even weight
- D.

In each cycle  $C$  in  $G$ , either all edges in  $C$  have even weight OR all edges in  $C$  have odd weight


Question Type : MSQ  
 Question ID : 6420085013  
 Status : Answered  
 Chosen Option : A

- Q.34** Consider a disk with the following specifications: rotation speed of 6000 RPM, average seek time of 5 milliseconds, 500 sectors/track, 512-byte sectors. A file has content stored in 3000 sectors located *randomly* on the disk. Assuming average rotational latency, the total time (*in seconds, rounded off to 2 decimal places*) to read the entire file from the disk is \_\_\_\_\_

Given --  
Answer :

Question Type : NAT  
Question ID : 6420085015  
Status : Not Answered

- Q.35** The number of distinct minimum-weight spanning trees of the following graph is \_\_\_\_\_

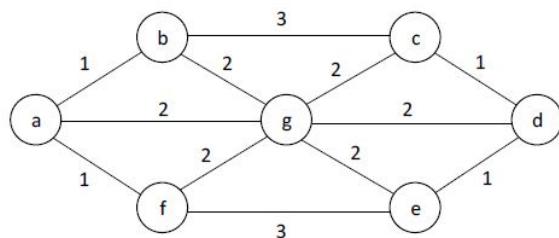

Given 7  
Answer :

Question Type : NAT  
Question ID : 6420085021  
Status : Answered

- Q.36** Let  $Z_n$  be the group of integers  $\{0, 1, 2, \dots, n - 1\}$  with addition modulo  $n$  as the group operation. The number of elements in the group  $Z_2 \times Z_3 \times Z_4$  that are their own inverses is \_\_\_\_\_

Given 0  
Answer :

Question Type : NAT  
Question ID : 6420085025  
Status : Answered

- Q.37** A non-pipelined instruction execution unit operating at 2 GHz takes an average of 6 cycles to execute an instruction of a program P. The unit is then redesigned to operate on a 5-stage pipeline at 2 GHz. Assume that the ideal throughput of the pipelined unit is 1 instruction per cycle. In the execution of program P, 20% instructions incur an average of 2 cycles stall due to data hazards and 20% instructions incur an average of 3 cycles stall due to control hazards. The speedup (*rounded off to one decimal place*) obtained by the pipelined design over the non-pipelined design is \_\_\_\_\_

Given --  
Answer :

Question Type : NAT  
Question ID : 6420085020  
Status : Not Answered

**Q.38**

Which one of the following CIDR prefixes exactly represents the range of IP addresses 10.12.2.0 to 10.12.3.255?

**Options**

- A. 10.12.2.0/22
- B. 10.12.0.0/22
- C. 10.12.2.0/23
- D. 10.12.2.0/24

Question Type : **MCQ**

Question ID : **6420085000**

Status : **Answered**

Chosen Option : **C**

**Q.39**

Consider an array  $X$  that contains  $n$  positive integers. A subarray of  $X$  is defined to be a sequence of array locations with consecutive indices.

The C code snippet given below has been written to compute the length of the longest subarray of  $X$  that contains at most two distinct integers. The code has two missing expressions labelled  $(P)$  and  $(Q)$ .

```
int first=0, second=0, len1=0, len2=0, maxlen=0;
for (int i=0; i < n; i++) {
    if (X[i] == first) {
        len2++; len1++;
    } else if (X[i] == second) {
        len2++;
        len1 = (P);
        second = first;
    } else {
        len2 = (Q);
        len1 = 1; second = first;
    }
    if (len2 > maxlen) {
        maxlen = len2;
    }
    first = X[i];
}
```

Which one of the following options gives the CORRECT missing expressions?

**(Hint:** At the end of the  $i$ -th iteration, the value of  $len1$  is the length of the longest subarray ending with  $X[i]$  that contains all equal values, and  $len2$  is the length of the longest subarray ending with  $X[i]$  that contains at most two distinct values.)

**Options**

- A.  $(P)$   $len1+1$        $(Q)$   $len2+1$
- B.  $(P)$   $len2+1$        $(Q)$   $len1+1$
- C.  $(P)$   $1$        $(Q)$   $len1+1$
- D.  $(P)$   $1$        $(Q)$   $len2+1$

Question Type : MCQ

Question ID : 6420085004

Status : Not Answered

Chosen Option : --

**Q.40**

Consider the following augmented grammar, which is to be parsed with a SLR parser. The set of terminals is  $\{a,b,c,d,\#, @\}$

$$\begin{aligned} S' &\rightarrow S \\ S &\rightarrow SS \mid Aa \mid bAc \mid Bc \mid bBa \\ A &\rightarrow d\# \\ B &\rightarrow @ \end{aligned}$$

Let  $I_0 = \text{CLOSURE}(\{S' \rightarrow \bullet S\})$ . The number of items in the set  $GOTO(I_0, S)$  is \_\_\_\_\_

**Given 10**

Answer :

Question Type : NAT

Question ID : 6420085027

Status : Answered

**Q.41**

Consider a multi-threaded program with two threads T1 and T2. The threads share two semaphores:  $s_1$  (initialized to 1) and  $s_2$  (initialized to 0). The threads also share a global variable  $x$  (initialized to 0). The threads execute the code shown below.

```
// code of T1           // code of T2
wait(s1);             wait(s1);
x = x+1;              x = x+1;
print(x);             print(x);
wait(s2);             signal(s2);
signal(s1);            signal(s1);
```

Which of the following outcome is/are possible when threads T1 and T2 execute concurrently?

**Options A.**

- A. T1 runs first and prints 1, T2 does not print anything (deadlock)
- B. T1 runs first and prints 1, T2 runs next and prints 2
- C. T2 runs first and prints 1, T1 runs next and prints 2
- D.
- E. T2 runs first and prints 1, T1 does not print anything (deadlock)

Question Type : **MSQ**  
 Question ID : **6420085008**  
 Status : **Answered**  
 Chosen Option : **A**

**Q.42**

Consider an Ethernet segment with a transmission speed of  $10^8$  bits/sec and a maximum segment length of 500 meters. If the speed of propagation of the signal in the medium is  $2 \times 10^8$  meters/sec, then the minimum frame size (*in bits*) required for collision detection is \_\_\_\_\_

Given **1000**

Answer :

Question Type : **NAT**  
 Question ID : **6420085017**  
 Status : **Answered**

**Q.43**

Let  $L_1$  be the language represented by the regular expression  $b^*ab^*(ab^*ab^*)^*$  and  $L_2 = \{ w \in (a+b)^* \mid |w| \leq 4 \}$ , where  $|w|$  denotes the length of string  $w$ . The number of strings in  $L_2$  which are also in  $L_1$  is \_\_\_\_\_

Given **16**

Answer :

Question Type : **NAT**  
 Question ID : **6420085024**  
 Status : **Answered**

**Q.44**

Consider a 32-bit system with 4 KB page size and page table entries of size 4 bytes each. Assume 1 KB =  $2^{10}$  bytes. The OS uses a 2-level page table for memory management, with the page table containing an outer page directory and an inner page table. The OS allocates a page for the outer page directory upon process creation. The OS uses demand paging when allocating memory for the inner page table, i.e., a page of the inner page table is allocated only if it contains at least one valid page table entry.

An active process in this system accesses 2000 unique pages during its execution, and none of the pages are swapped out to disk. After it completes the page accesses, let  $X$  denote the minimum and  $Y$  denote the maximum number of pages across the two levels of the page table of the process.

The value of  $X+Y$  is \_\_\_\_\_

Given 8

Answer :

Question Type : NAT

Question ID : 6420085026

Status : Answered

**Q.45**

Consider a context-free grammar  $G$  with the following 3 rules.

$$S \rightarrow aS, S \rightarrow aSbS, S \rightarrow c$$

Let  $w \in L(G)$ . Let  $n_a(w)$ ,  $n_b(w)$ ,  $n_c(w)$  denote the number of times  $a, b, c$  occur in  $w$ , respectively. Which of the following statements is/are TRUE?

Options

- A.  $n_a(w) > n_b(w)$
- B.  $n_c(w) = n_b(w) * 2$
- C.  $n_c(w) = n_b(w) + 1$
- D.  $n_a(w) > n_c(w) - 2$

Question Type : MSQ

Question ID : 6420085014

Status : Answered

Chosen Option : A

**Q.46**

A processor uses a 32-bit instruction format and supports byte-addressable memory access. The ISA of the processor has 150 distinct instructions. The instructions are equally divided into two types, namely R-type and I-type, whose formats are shown below.

R-type Instruction Format:

OPCODE	UNUSED	DST Register	SRC Register1	SRC Register 2
--------	--------	--------------	---------------	----------------

I-type Instruction Format:

OPCODE	DST Register	SRC Register	# Immediate value/address
--------	--------------	--------------	---------------------------

In the OPCODE, 1 bit is used to distinguish between I-type and R-type instructions and the remaining bits indicate the operation. The processor has 50 architectural registers, and all register fields in the instructions are of equal size.

Let  $X$  be the number of bits used to encode the UNUSED field,  $Y$  be the number of bits used to encode the OPCODE field, and  $Z$  be the number of bits used to encode the immediate value/address field. The value of  $X + 2Y + Z$  is \_\_\_\_\_

Given 128

Answer :

Question Type : NAT

Question ID : 6420085023

Status : Answered

**Q.47**

Consider a TCP connection operating at a point of time with the congestion window of size 12 MSS (Maximum Segment Size), when a timeout occurs due to packet loss. Assuming that all the segments transmitted in the next two RTTs (Round Trip Time) are acknowledged correctly, the congestion window size (in MSS) during the third RTT will be \_\_\_\_\_

Given 24

Answer :

Question Type : NAT

Question ID : 6420085016

Status : Answered

**Q.48**

You are given a set  $V$  of distinct integers. A binary search tree  $T$  is created by inserting all elements of  $V$  one by one, starting with an empty tree. The tree  $T$  follows the convention that, at each node, all values stored in the left subtree of the node are smaller than the value stored at the node. You are not aware of the sequence in which these values were inserted into  $T$ , and you do not have access to  $T$ .

Which one of the following statements is TRUE?

Options

- A. Inorder traversal of  $T$  can be determined from  $V$
- B. Preorder traversal of  $T$  can be determined from  $V$
- C. Root node of  $T$  can be determined from  $V$
- D. Postorder traversal of  $T$  can be determined from  $V$

Question Type : MCQ

Question ID : 6420085001

Status : Answered

Chosen Option : C

**Q.49**

A processor with 16 general purpose registers uses a 32-bit instruction format. The instruction format consists of an opcode field, an addressing mode field, two register operand fields, and a 16-bit scalar field. If 8 addressing modes are to be supported, the maximum number of unique opcodes possible for every addressing mode is \_\_\_\_\_

Given **64**

Answer :

Question Type : **NAT**

Question ID : **6420085019**

Status : **Answered**

**Q.50**

What is the output of the following C program?

```
#include <stdio.h>

int main() {
    double a[2]={20.0, 25.0}, *p, *q;
    p = a;
    q = p + 1;
    printf("%d,%d", (int)(q - p), (int)(*q - *p));
    return 0;
}
```

**Options**

- A. 1, 5
- B. 8, 5
- C. 1, 8
- D. 4, 8

Question Type : **MCQ**

Question ID : **6420084998**

Status : **Answered**

Chosen Option : **B**

**Q.51**

Consider the following expression:  $x[i] = (p + r) * -s[i] + u/w$ . The following sequence shows the list of triples representing the given expression, with entries missing for triples (1), (3), and (6).

(0)	+	p	r
(1)			
(2)	uminus	(1)	
(3)			
(4)	/	u	w
(5)	+	(3)	(4)
(6)			
(7)	=	(6)	(5)

Which one of the following options fills in the missing entries CORRECTLY?

**Options**

- A. (1) []= s i      (3) - (0) (2)      (6) =[] x i
- B. (1) =[] s i      (3) \* (0) (2)      (6) []= x i
- C. (1) =[] s i      (3) \* (0) (2)      (6) []= x (5)
- D. (1) []= s i      (3) - (0) (2)      (6) =[] x (5)

Question Type : MCQ  
 Question ID : 6420085005  
 Status : Answered  
 Chosen Option : C

**Q.52**

A functional dependency  $F: X \rightarrow Y$  is termed as a *useful functional dependency* if and only if it satisfies all the following three conditions:

- $X$  is not the empty set.
- $Y$  is not the empty set.
- Intersection of  $X$  and  $Y$  is the empty set.

For a relation  $R$  with 4 attributes, the total number of possible useful functional dependencies is \_\_\_\_\_


**Given 16**

Answer :

Question Type : NAT  
 Question ID : 6420085018  
 Status : Answered

**Q.53**

Let  $M$  be the 5-state NFA with  $\epsilon$ -transitions shown in the diagram below.

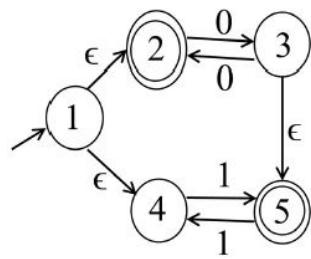

Which one of the following regular expressions represents the language accepted by  $M$ ?

**Options**

- A.  $(00)^* + 1(11)^*$
- B.  $(00)^* + (1 + (00)^*)(11)^*$
- C.  $0^* + (1 + 0(00)^*)(11)^*$
- D.  $0^+ + 1(11)^* + 0(11)^*$

Question Type : MCQ  
Question ID : 6420085003  
Status : Answered  
Chosen Option : B


- Q.54** Consider 4-variable functions  $f_1, f_2, f_3, f_4$  expressed in sum-of-minterms form as given below.

$$f_1 = \sum(0,2,3,5,7,8,11,13)$$

$$f_2 = \sum(1,3,5,7,11,13,15)$$

$$f_3 = \sum(0,1,4,11)$$

$$f_4 = \sum(0,2,6,13)$$

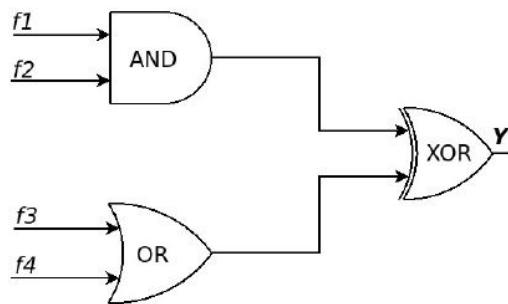

With respect to the circuit given above, which of the following options is/are CORRECT?

**Options**

- A.  $Y = \sum(0,1,2,3,4,5,6,7)$
- B.  $Y = \sum(0,1,2,11,13)$
- C.  $Y = \prod(3,4,5,6,7,8,9,10,12,14,15)$
- D.  $Y = \prod(8,9,10,11,12,13,14,15)$

Question Type : **MSQ**  
 Question ID : **6420085012**  
 Status : **Answered**  
 Chosen Option : **C**

**Q.55**

Which of the following is/are EQUAL to 224 in radix-5 (i.e., base-5) notation?

**Options**

- A. 64 in radix-10
- B. 100 in radix-8
- C. 50 in radix-16
- D. 121 in radix-7

Question Type : **MSQ**  
 Question ID : **6420085011**  
 Status : **Answered**  
 Chosen Option : **A**