

## ASSIGNMENT 4

|              |   |
|--------------|---|
| Date         | 24 Oct 22   |
| Name         | SHANMUGAM B (Team Lead)                             |
| Team ID      | PNT2022TMID28579                                    |
| Project Name | SmartFarmer – IoT Enabled Smart Farming Application |

### QUESTION :-

Write code and connections in wokwi for ultrasonic sensor. Whenever distance is less than 100 cms send "alert" to IBM cloud and display in device recent events.

### CODE :-

```
#include <WiFi.h>
#include <PubSubClient.h>
WiFiClient wifiClient;
String data3;
#define ORG "x0fxss"
#define DEVICE_TYPE "Noder"
#define DEVICE_ID "1234"
#define TOKEN "987654321"
#define speed 0.034
#define led 14
char server[] = ORG ".messaging.internetofthings.ibmcloud.com";
char publishTopic[] = "iot-2/evt/shanmugam_assignment4/fmt/json";
char topic[] = "iot-2/cmd/home/fmt/String";
char authMethod[] = "use-token-auth";
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
PubSubClient client(server, 1883, wifiClient);
```

```
const int trigpin=5;
const int echopin=18;
String command;
String data="";

long duration;
float dist;
```

```

void setup()
{
    Serial.begin(115200);
    pinMode(led, OUTPUT);
    pinMode(trigpin, OUTPUT);
    pinMode(echopin, INPUT);
    wifiConnect();
    mqttConnect();
}

void loop() {
    bool isNearby = dist < 100;
    digitalWrite(led, isNearby);

    publishData();
    delay(500);

    if (!client.loop()) {
        mqttConnect();
    }
}

void wifiConnect() {
    Serial.print("Connecting to "); Serial.print("Wifi");
    WiFi.begin("Wokwi-GUEST", "", 6);
    while (WiFi.status() != WL_CONNECTED) {
        delay(500);
        Serial.print(".");
    }
    Serial.print("WiFi connected, IP address: ");
    Serial.println(WiFi.localIP());
}

void mqttConnect() {
    if (!client.connected()) {
        Serial.print("Reconnecting MQTT client to "); Serial.println(server);
        while (!client.connect(clientId, authMethod, token)) {
            Serial.print(".");
            delay(500);
        }
        initManagedDevice();
        Serial.println();
    }
}

void initManagedDevice() {

```

```

    if (client.subscribe(topic)) {
        // Serial.println(client.subscribe(topic));
        Serial.println("IBM subscribe to cmd OK");
    } else {
        Serial.println("subscribe to cmd FAILED");
    }
}

void publishData()
{
    digitalWrite(trigpin, LOW);
    digitalWrite(trigpin, HIGH);
    delayMicroseconds(10);
    digitalWrite(trigpin, LOW);
    duration=pulseIn(echopin, HIGH);
    dist=duration*speed/2;
    if(dist<100){
        String payload = "{\"Alert Distance\":\"";
        payload += dist;
        payload += "\"}";

        Serial.print("\n");
        Serial.print("Sending payload: ");
        Serial.println(payload);
        if (client.publish(publishTopic, (char*) payload.c_str())) {
            Serial.println("Publish OK");
        }
    }

    if(dist>100){
        String payload = "{\"Distance\":\"";
        payload += dist;
        payload += "\"}";

        Serial.print("\n");
        Serial.print("Sending payload: ");
        Serial.println(payload);
        if(client.publish(publishTopic, (char*) payload.c_str())) {
            Serial.println("Publish OK");
        }else {
            Serial.println("Publish FAILED");
        }
    }
}
}

```

## OUTPUT:-

i) When distance greater than 100 cm

The screenshot shows the Wokwi IoT simulator interface. On the left, the 'sketch.ino' file contains the following code:

```
1 #include <WiFi.h>
2 #include <PubSubClient.h>
3 WiFiClient wifiClient;
4 String data;
5 #define ORG "x0fxss"
6 #define DEVICE_TYPE "Noder"
7 #define DEVICE_ID "1234"
8 #define TOKEN "987654321"
9 #define speed 0.034
10 #define led 14
11 char server[] = ORG ".messaging.internetofthings.ibmcloud.com";
12 char publishTopic[] = "iot-2/evt/shanmugam_assignment4/fmt/json";
13 char topic[] = "iot-2/cmd/home/fmt/String";
14 char authMethod[] = "use-token-auth";
15 char token[] = TOKEN;
16 char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
17 PubSubClient client(server, 1883, wifiClient);
18
19
20
21 const int trigpin=5;
22 const int echopin=18;
23 String command;
24 String data="";
25
26 long duration;
27 float dist;
```

On the right, the 'Simulation' window shows a virtual circuit with an ESP32 microcontroller, an HC-SR04 ultrasonic sensor, and an LED. The output log displays the following messages:


```
Publish OK
Sending payload: {"Distance":121.97}
Publish OK
Sending payload: {"Distance":121.96}
Publish OK
```

## IBM RECENT EVENTS


The screenshot shows the IBM Watson IoT Platform dashboard. The 'Recent Events' tab is selected for device '1234'. The events are listed in a table:

| Event        | Value               | Format | Last Received     |
|--------------|---------------------|--------|-------------------|
| shanmugam... | {"Distance":121.97} | json   | a few seconds ago |
| shanmugam... | {"Distance":121.96} | json   | a few seconds ago |
| shanmugam... | {"Distance":121.96} | json   | a few seconds ago |
| shanmugam... | {"Distance":121.97} | json   | a minute ago      |
| shanmugam... | {"Distance":121.97} | json   | a minute ago      |

ii) When distance less than 100

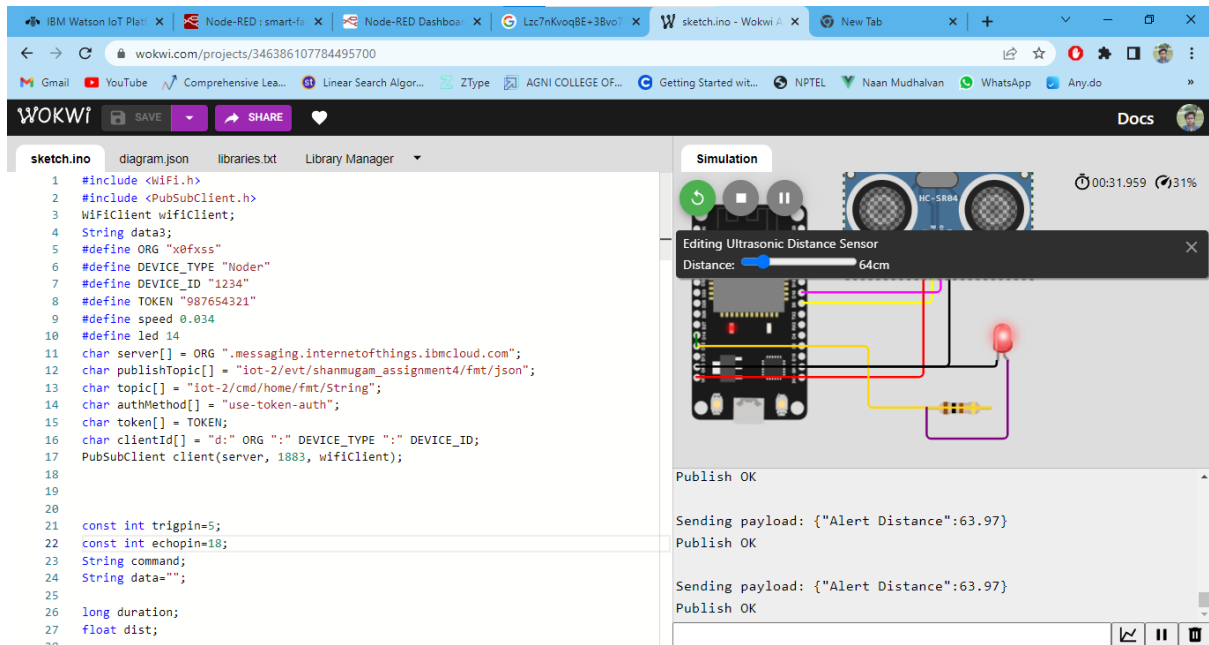

## IBM RECENT EVENTS

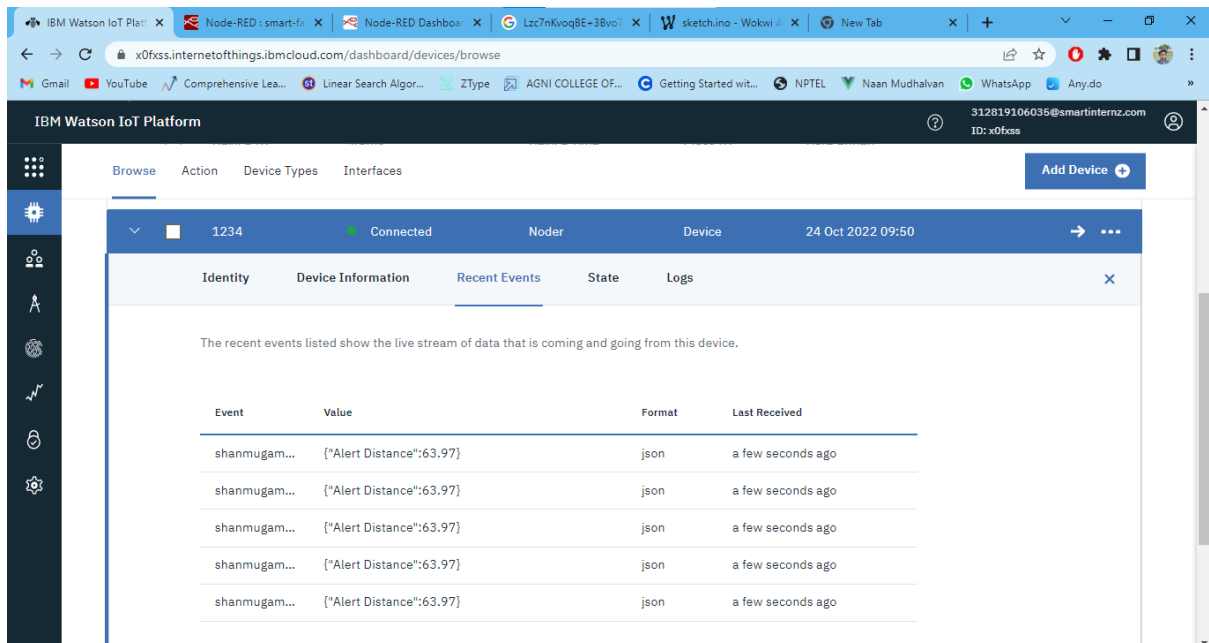

## WOKWI LINK -

<https://wokwi.com/projects/346386107784495700>