

Veri İletişimi ve Bilgisayar Ağları BLM3051

Dr. Öğr. Üyesi Furkan ÇAKMAK



Ders Bilgilendirme Formu - Haftalık Konular

BLM3051
Veri İletişimi
ve Bilgisayar
Ağları - 7


Week #	Date	Subjects
1	20.02.2025	Veri İletişimine Giriş, Mimari Modeller
2	27.02.2025	OSI Referans Modeli, Katmanları, Fonksiyonları
3	06.03.2025	Fiziksel Katman, Sinyalleşme
4	13.03.2025	Paralel ve Seri İletişim, Haberleşme Ortamları ve Teknik Özellikleri, Multiplexing (TDM, FDM)
5	20.03.2025	Hata Tespiti ve Düzeltme Yöntemleri
6	27.03.2025	Veri Bağı Kontrol Teknikleri ve Akış Kontrolü
7	03.04.2025	Senkron ve Asenkron Veri Bağı Protokolleri (BSC, HDLC)
8	10.04.2025	Ara Sınav
9	17.04.2025	LAN Teknolojileri, IEEE 802.3, IEEE 802.4, 802.5, 802.11
10	24.04.2025	Geniş Alan Ağlarında Kullanılan Teknolojiler (X.25, ISDN, FR, ATM, xDSL.)
11	01.05.2025	Emek ve Dayanışma Günü
12	08.05.2025	Ağ Katmanı, Anahtarlama, Bağlantılı ve Bağlantısız Servisler, Statik ve Dinamik Routing
13	15.05.2025	Ağ Katmanında Sıkışıklık, Sebepleri ve Çözümleri, IP (Internetworking Protocol)
14	22.05.2025	ICMP, BOOTP, DHCP, Taşıma Katmanı - UDP (User Datagram Protocol), TCP (Transmission Control Protocol)
15	29.05.2025	Öğrenci Proje Sunumları

Dr. Öğr. Üyesi Furkan ÇAKMAK

Data Link Protocols

BLM3051
Veri İletişimi
ve Bilgisayar
Ağları - 7

- Protocol is a set of rules used to perform the necessary operations during data flow.
 - Synchronous
 - Asynchronous

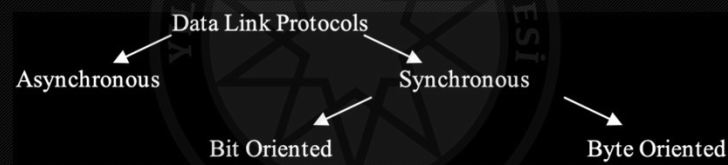

Dr. Öğr. Üyesi Furkan ÇAKMAK

Data Link Controls (DTC)

BLM3051
Veri İletişimi
ve Bilgisayar
Ağları - 7

- Components
 - Software
 - Hardware (UART/USART)
- Tasks
 - Synchronous Transmission
 - Physical Level: Common timing signal
 - Logical Level: Special bit or bit-arrays
 - Flow Control
 - Error Control
 - Transmission Rules
 - Which one is sender/receiver?
 - Whether frames are for data or control purposes

Dr. Öğr. Üyesi Furkan ÇAKMAK

Asynchronous Protocols

BLM3051
Veri İletişimi
ve Bilgisayar
Ağları - 7

- Used for connections made with a modem
- Logical Sync.
 - Start bit
 - End bit
- There may be gaps of variable sizes between data blocks.
- Cons: Additional data
- Cons: Slow transmission
- Most Common Examples:
 - X-Modem
 - Y-Modem
 - Z-Modem
 - Kermit

Dr. Öğr. Üyesi Furkan ÇAKMAK

Synchronous Protocols

BLM3051
Veri İletişimi
ve Bilgisayar
Ağları - 7

- Instead of start and end bits, FLAGS is used
 - Synchronization premise (SYN) bit-arrays
 - Synchronization successor (EOT) bit-arrays
- 2 types:
 - Physical Level Synchronization
 - Common Clock Signal
 - Logical Level Synchronization (in Data Link Layer)
 - FLAGS
- Thanks to the fast transmission
 - Used in LAN, MAN and WAN technologies
- The protocol perceives the data sent as a consecutive byte sequence.
 - According to the coding system used (ASCII or EBCDIC)

Dr. Öğr. Üyesi Furkan ÇAKMAK

Synchronous Protocols - Byte Oriented

BLM3051
Veri İletişimi
ve Bilgisayar
Ağları - 7

- *Character Oriented
- ASCII or EBCDIC coding
- 2 types of frames
 - Control frames
 - Data frames

S Y N	S Y N	S T X	Data	E T X	BCC
-------------	-------------	-------------	------	-------------	-----

Control Chars	Explanation
SYN	Synchronous idle (makes the channel active)
PAD	Frame PAD (used for completion)
DLE	Data Link Escape (Escape char for control chars)
ENQ	Enquiry (Request)
SOH	Start of Heading
STX	Start of Text
ITB	End of Intermediate Block
ETB	End of Transmission Block
ETX	End of Text
EOT	End of Transmission
BCC	Block Check Count (LRC -> 1 byte, CRC -> 2 bytes)
ACK0	Acknowledge Even Numbered Blocks
ACK1	Acknowledge Odd Numbered Blocks
WACK	Wait Before Transmitting
TTD	Temporary Text Delay (While filling buffer in sender side)
RVI	Reverse Interrupt (Request for urgent response)
NUL	(Filling spaces)

Dr. Öğr. Üyesi Furkan ÇAKMAK

Synchronous Protocols - Byte Oriented - Data Frames

BLM3051
Veri İletişimi
ve Bilgisayar
Ağları - 7

S Y N	S Y N	S O H	Header	S T X	Data	E T X	BCC
-------------	-------------	-------------	--------	-------------	------	-------------	-----

Header includes address

S Y N	S Y N	S O H	Header	S T X	Data	E T X	E T X	BCC
-------------	-------------	-------------	--------	-------------	------	-------------	-------------	-----


A control char in the data sent by the sender

Data Transparency ? (in voice and image data)

Dr. Öğr. Üyesi Furkan ÇAKMAK

Synchronous Protocols - Byte Oriented - Data Frames


BLM3051
Veri İletişimi
ve Bilgisayar
Ağları - 7

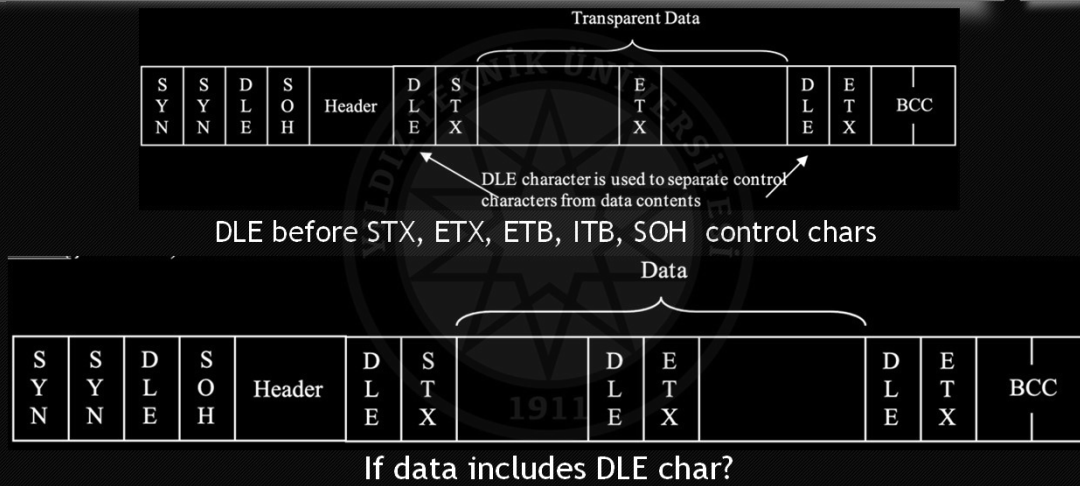

Dr. Öğr. Üyesi Furkan ÇAKMAK

Synchronous Protocols - Byte Oriented - Data Frames


BLM3051
Veri İletişimi
ve Bilgisayar
Ağları - 7

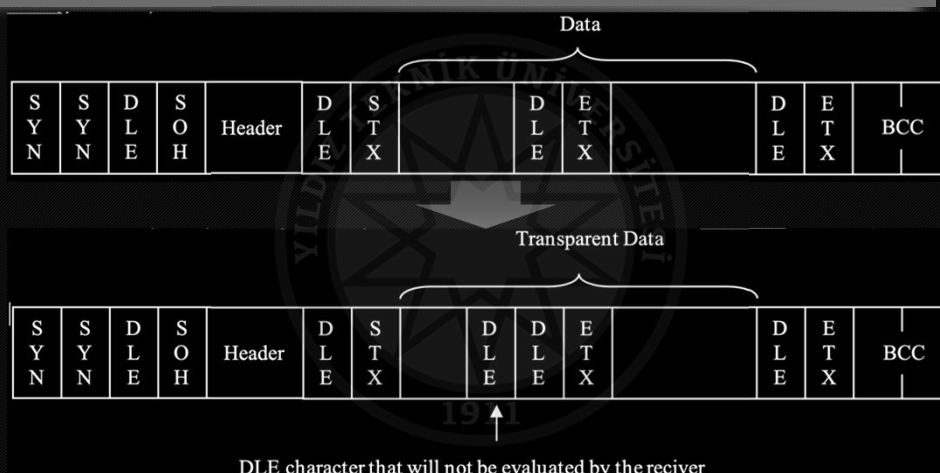

Dr. Öğr. Üyesi Furkan ÇAKMAK

Synchronous Protocols - Byte Oriented - Multi Block Frames


BLM3051
Veri İletişimi
ve Bilgisayar
Ağları - 7

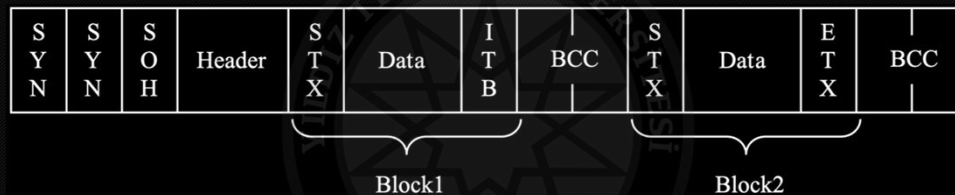

Dr. Öğr. Üyesi Furkan ÇAKMAK

Synchronous Protocols - Byte Oriented - Multi-Frame


BLM3051
Veri İletişimi
ve Bilgisayar
Ağları - 7

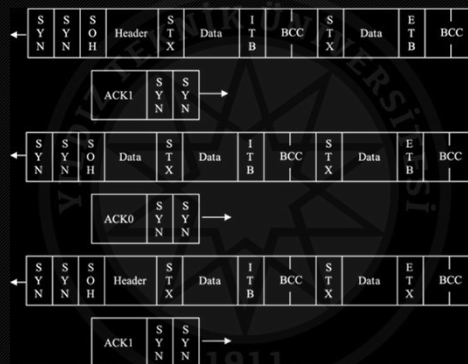

Dr. Öğr. Üyesi Furkan ÇAKMAK

Synchronous Protocols - Byte Oriented - Control Frames

BLM3051
Veri İletişimi
ve Bilgisayar
Ağları - 7

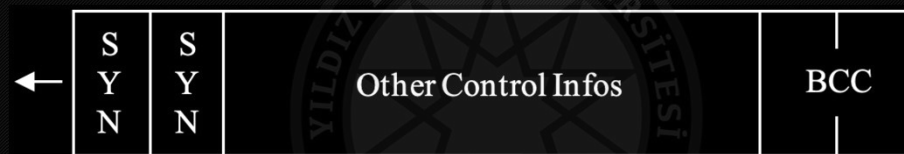

Dr. Öğr. Üyesi Furkan ÇAKMAK

Synchronous Protocols - Byte Oriented - BSC (Binary Synchronous Communication)

BLM3051
Veri İletişimi
ve Bilgisayar
Ağları - 7

- IBM
- Used until the late 1960s
- General Specs:
 - Suitable for point-to-point or multi-point connections
 - Half duplex
 - Use STOP & WAIT for Flow Control and ARQ
 - Code Dependent

Dr. Öğr. Üyesi Furkan ÇAKMAK

Synchronous Protocols - Bit Oriented


BLM3051
Veri İletişimi
ve Bilgisayar
Ağları - 7

- Used more actively than byte oriented protocols
 - Fit more information into a shorter frame size
 - Less faced with data transparency problem
- All bit oriented protocols reference HDLC (High Level Data Link Control)
 - ISO
- General Specs:
 - Suitable for point-to-point or multi-point connection.
 - Support Half duplex and Duplex
 - Use Sliding Windows for Flow Control and ARQ
 - Code Independent

Dr. Öğr. Üyesi Furkan ÇAKMAK

Synchronous Protocols - Bit Oriented

BLM3051
Veri İletişimi
ve Bilgisayar
Ağları - 7

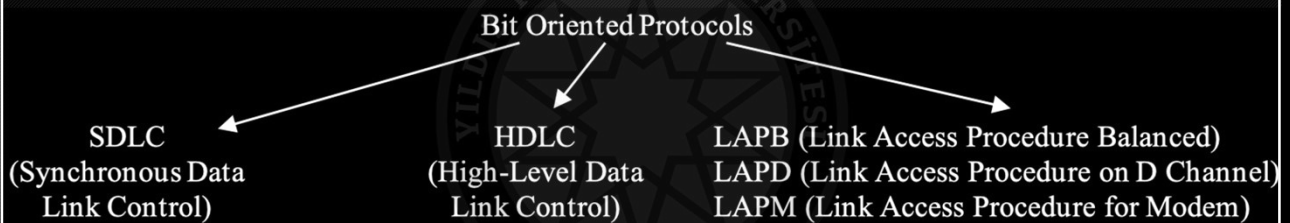

Dr. Öğr. Üyesi Furkan ÇAKMAK

Synchronous Protocols - Bit Oriented - HDLC (High Level Data Link Control)

BLM3051
Veri İletişimi
ve Bilgisayar
Ağları - 7

• Concepts used in HDLC

- Station types
 - Primary
 - Secondary
 - Combined

• Configuration

- Unbalanced
- Balanced (not defined in HDLC)

• Modes of communication

- NRM (Normal Response Mode): Unbalanced. The usual primary/secondary relationship
- ARM (Asynch. Response Mode): Unbalanced. Secondary station transmit data without primary station's permission if line is available.
- ABM (Asynch. Balanced Mode): Balanced


Modes of Communication	NRM	ARM	ABM
Station Types	Primary/Secondary	Primary/Secondary	Combined
Transmission Starter	Primary	Primary/Secondary	Any of them

Dr. Öğr. Üyesi Furkan ÇAKMAK

Synchronous Protocols - Bit Oriented - HDLC Frame Structure

BLM3051
Veri İletişimi
ve Bilgisayar
Ağları - 7

I-Frame	Information	It is used to carry user data and related control information.
S-Frame	Supervisory	It is the type of frame used at the data link layer to perform functions such as error and flow control.
U-Frame	Unnumbered	It is a special purpose management frame used to provide system management.

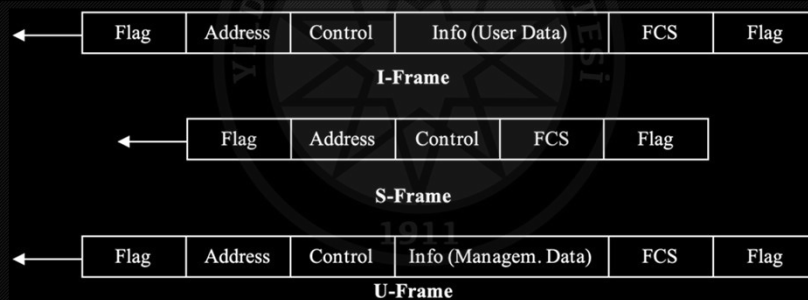

Dr. Öğr. Üyesi Furkan ÇAKMAK

Synchronous Protocols - Bit Oriented - HDLC Frame Structure - FLAG Field


BLM3051
Veri İletişimi
ve Bilgisayar
Ağları - 7

- Consist of 8-bits
 - 01111110
- Determinin start and end point of frames
- Ensure synchronicity
- Critical point for data transparency
 - Bit stuffing
 - Sender add a 0-bit between 1's (like escape char)

Dr. Öğr. Üyesi Furkan ÇAKMAK

Synchronous Protocols - Bit Oriented - HDLC Frame Structure - FLAG Field - Bit Stuffing

BLM3051
Veri İletişimi
ve Bilgisayar
Ağları - 7

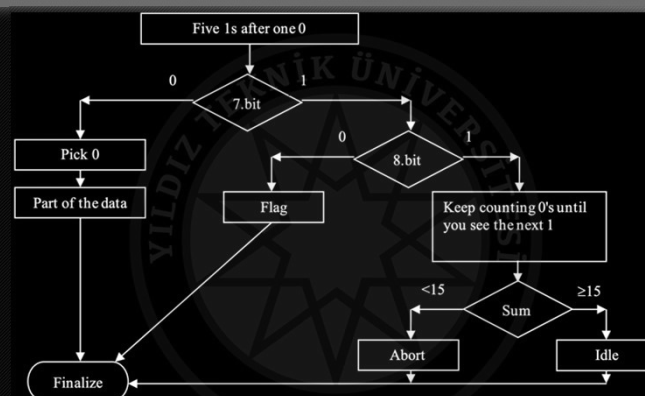

Dr. Öğr. Üyesi Furkan ÇAKMAK

Synchronous Protocols - Bit Oriented - HDLC Frame Structure - ADDRESS Field

BLM3051
Veri İletişimi
ve Bilgisayar
Ağları - 7

- Contains the address of the secondaries.
- Address data is in Network Layer (Third Layer)
 - Used to determine whether;
 - Is it command? or Is it answer?



Single byte addressing



Multi byte addressing

Dr. Öğr. Üyesi Furkan ÇAKMAK


Synchronous Protocols - Bit Oriented - HDLC Frame Structure - CONTROL Field

BLM3051
Veri İletişimi
ve Bilgisayar
Ağları - 7


- 1 or 2 byte length
 - If $w=7$ in sliding window technique, length is 1
 - If $w=127$ in sliding window technique, length is 2
 - In applications with high line delays such as WAN



I-Frame



S-Frame



U-Frame

Dr. Öğr. Üyesi Furkan ÇAKMAK

Synchronous Protocols - Bit Oriented - HDLC Frame Structure - I-Frame

BLM3051
Veri İletişimi
ve Bilgisayar
Ağları - 7

- If $w=7$;
 - Each I-Frame contains 2 three-bit fields for flow and error control.
 - N(S): Sequence number of the sending window
 - Like ACK
 - N(R): Sequence number of the receiving window
 - If last frame is error-free, N(R) contains next frame's number
 - If last frame has errors, N(R) contains number of faulty frame
- If $w=127$
 - Each I-Frame contains 2 seven-bit fields for flow and error control.

0	N(S)	P/F	N(R)
---	------	-----	------

Dr. Öğr. Üyesi Furkan ÇAKMAK

Synchronous Protocols - Bit Oriented - HDLC Frame Structure - S-Frame

BLM3051
Veri İletişimi
ve Bilgisayar
Ağları - 7

- S-Frame means that neither side has data to send to the other.

1	0	Code	P/F	N(R)
---	---	------	-----	------

Code	Abbreviation	Explanation
00	RR	Receive Ready
01	REJ	Reject – (go back n)
10	RNR	Receive Not Ready
11	SREJ	Selective Reject – (selective reject)

Dr. Öğr. Üyesi Furkan ÇAKMAK


Synchronous Protocols - Bit Oriented - HDLC Frame Structure - S-Frame - RR

BLM3051
Veri İletişimi
ve Bilgisayar
Ağları - 7

- It has four basic uses:

- ACK
- POLL
 - $P=1$
- REJECT POLL
 - $F=1$
- ACCEPT SELECT
 - $F=1$

1	0	Code	P/F	N(R)
---	---	------	-----	------

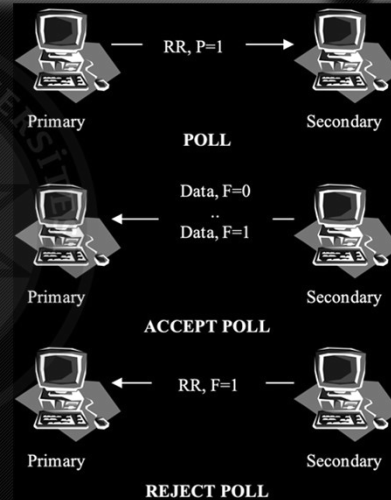

Dr. Öğr. Üyesi Furkan ÇAKMAK


Synchronous Protocols - Bit Oriented - HDLC Frame Structure - S-Frame - RNR

BLM3051
Veri İletişimi
ve Bilgisayar
Ağları - 7

- It has three basic uses:

- ACK
- SELECT
 - $P=1$
 - If primary sends RR and $P=1$, it means POLL.
- REJECT SELECT
 - $F=1$

1	0	Code	P/F	N(R)
---	---	------	-----	------

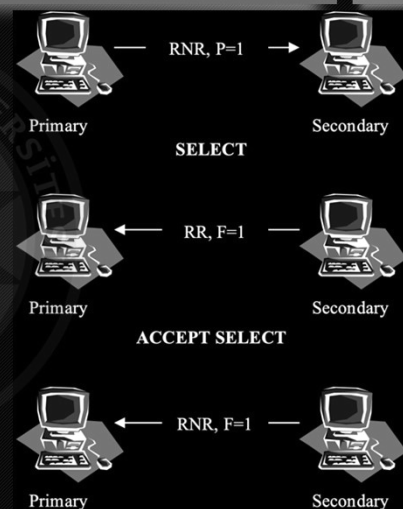

Dr. Öğr. Üyesi Furkan ÇAKMAK

Synchronous Protocols - Bit Oriented - HDLC Frame Structure - S-Frame - REJ, SREJ

BLM3051
Veri İletişimi
ve Bilgisayar
Ağları - 7

- Used to return negative feedback from the receiver
 - REJ: Go Back N ARQ
 - It is used to inform the sender that the frame whose number is written in the N (R) field and the frames that come after it did not reach the receiver or that it received incorrectly, and to ensure that it is sent again.
 - SREJ: Selective Reject ARQ
 - It is used in the N (R) field to inform the sender that the data frame whose number is written on it did not reach the receiver or that it was received incorrectly and to send it again.

Dr. Öğr. Üyesi Furkan ÇAKMAK

Synchronous Protocols - Bit Oriented - HDLC Frame Structure - U-Frame

BLM3051
Veri İletişimi
ve Bilgisayar
Ağları - 7

- Used to provide session control
- The data area is used to carry information required for system management functions
- 1st code field consist of 2 bits
- 2nd code field consist of 3 bits
- $2^5 = 32$ different state
- These states (commands and answers) can be collected in 5 different categories:
 - Mode setting
 - Unnumbered exchange
 - Disconnection
 - Initialization
 - Miscellaneous

1	1	Code	P/F	Code
---	---	------	-----	------

Dr. Öğr. Üyesi Furkan ÇAKMAK

Synchronous Protocols - Bit Oriented - HDLC Frame Structure - U-Frame - Mode Setting

BLM3051
Veri İletişimi
ve Bilgisayar
Ağları - 7

- How will the transmission be?
 - 00-001 (SNRM-Set Normal Response Mode) -> w=7
 - 11-000 (SARM-Set Async. Response Mode) -> w=7
 - 11-100 (SABM-Set Async. Balanced Mode) -> w=7
 - 11-011 (SNRM Extended) -> w=127
 - 11-010 (SARM Extended) -> w=127
 - 11-110 (SABM Extended) -> w=127

Dr. Öğr. Üyesi Furkan ÇAKMAK

Synchronous Protocols - Bit Oriented - HDLC Frame Structure - U-Frame - Unnumbered Exchange

BLM3051
Veri İletişimi
ve Bilgisayar
Ağları - 7

- Data connection information exchange
 - 00-100 (UP-Unnumbered Poll): POLL request
 - 00-000 (UI-Unnumbered Info): exchange of date/time information to be used for sync.
 - UI would be a command or answer.
 - If it is used for command, it transports list of parameters to be used for transmission.
 - If it is used for answer, it carries information that determines the capability of the receiver.
 - 00-110 (UA-Unnumbered Ack): Sent in response to the UP command

Dr. Öğr. Üyesi Furkan ÇAKMAK

Synchronous Protocols - Bit Oriented - HDLC Frame Structure - U-Frame - Disconnection

BLM3051
Veri İletişimi
ve Bilgisayar
Ağları - 7

- There are 3 types of disconnection command.
 - 00-010 (DISC): Sent by the first side to terminate the connection to the other.
 - 00-010 (RD): It is used to notify the request to terminate the connection from the second station to the first.
 - 11-000 (DM): When the address is sent from the specified station to the station wishing to establish the connection, it is sent as negative feedback information to the mode setting command.

Dr. Öğr. Üyesi Furkan ÇAKMAK

Synchronous Protocols - Bit Oriented - HDLC Frame Structure - U-Frame - Initialization

BLM3051
Veri İletişimi
ve Bilgisayar
Ağları - 7

- Used for initializations for all sides.
 - 10-000 with P (SIM-Set Initialization Mode)
 - Command is sent from the first station to the second
 - UI command will be sent in response to SIM command
 - 10-000 with F (RIM-Request Initialization Mode)
 - It means that «I am waiting SIM command»
 - It is used when the second station cannot respond to the mode setting command without receiving the SIM command from the first.

Dr. Öğr. Üyesi Furkan ÇAKMAK

Synchronous Protocols - Bit Oriented - HDLC Frame Structure - U-Frame - Miscellaneous

BLM3051
Veri İletişimi
ve Bilgisayar
Ağları - 7


- 11-001 (RESET)
 - This is usually sent in response to a received FRMR code.
 - Explains that the secondary station must do the same
- 11-101 (XID)
 - Emphasizes that a self-determining information is requested from the secondary station.
 - Like questioning what your address is
- 10-001 (FRMR)
 - Used to determine that a syntax error was encountered in the received frame.

Dr. Öğr. Üyesi Furkan ÇAKMAK

Synchronous Protocols - Bit Oriented - HDLC Frame Structure - S-Frame - P/F (Poll/ Final)

BLM3051
Veri İletişimi
ve Bilgisayar
Ağları - 7

- P/F bit is always 1

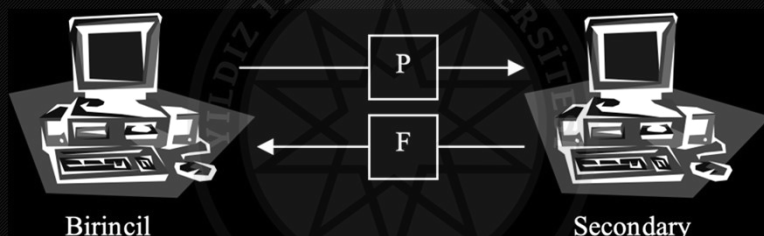


Dr. Öğr. Üyesi Furkan ÇAKMAK

Synchronous Protocols - Bit Oriented - HDLC Mechanism

BLM3051
Veri İletişimi
ve Bilgisayar
Ağları - 7


- I, U and S frames
- 3-phase mechanism
 - One of the sides must install the link
 - in order to be able to exchange data sequentially
 - User data, flow and control information required for error control must be transferred between the two ends.
 - One of the sides terminates the connection

Dr. Öğr. Üyesi Furkan ÇAKMAK

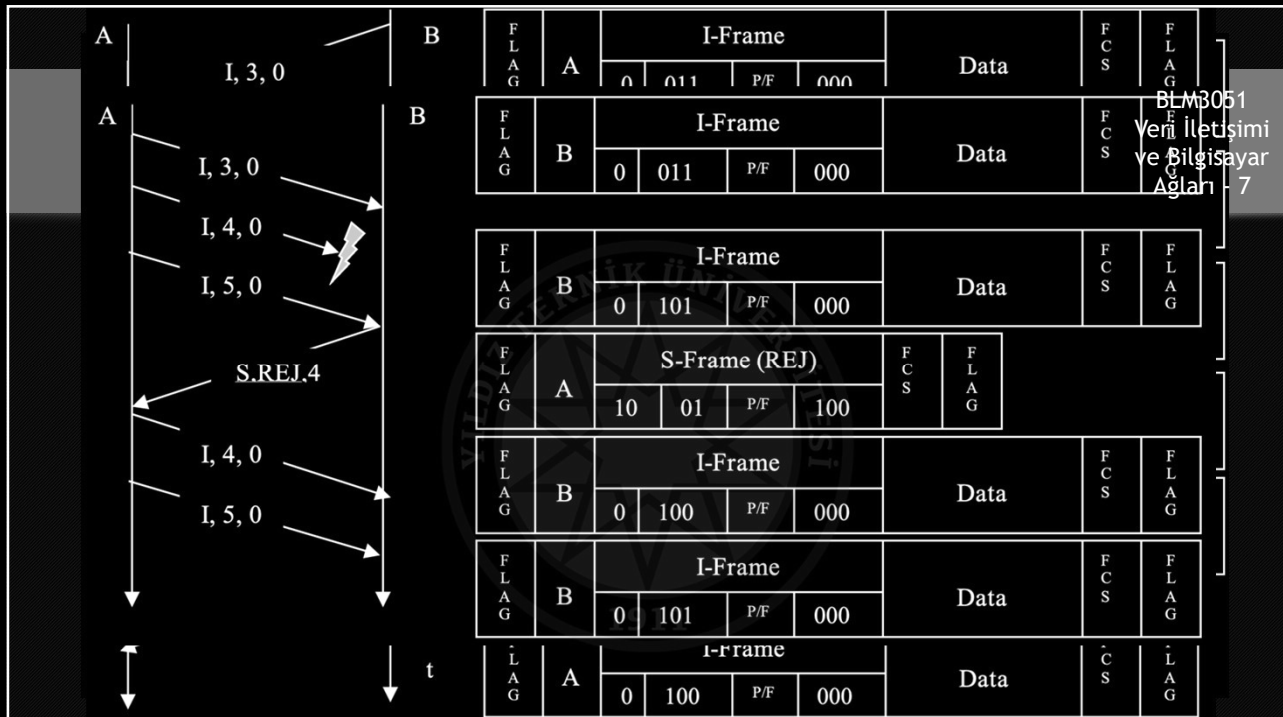

Synchronous Protocols - Bit Oriented - HDLC Mechanism - Multi-Point


BLM3051
Veri İletişimi
ve Bilgisayar
Ağları - 7

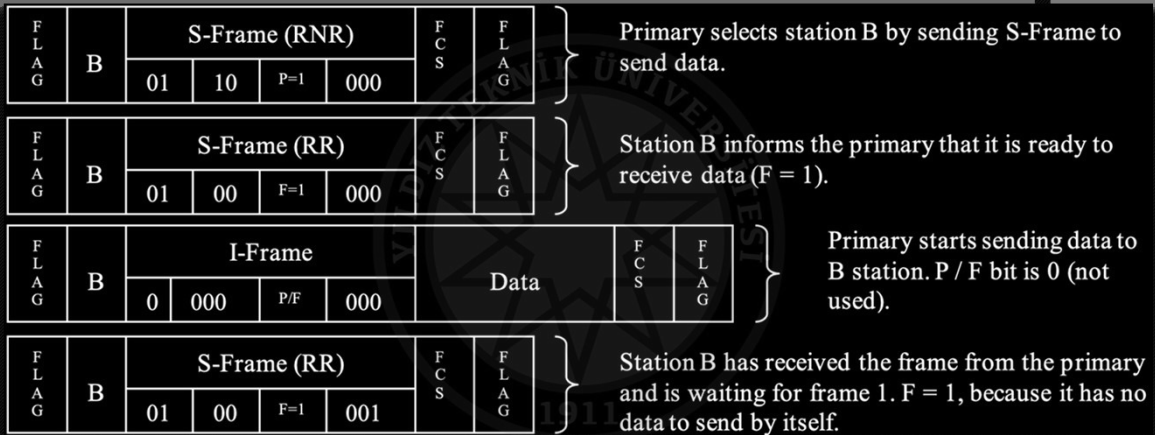

Dr. Öğr. Üyesi Furkan ÇAKMAK

Synchronous Protocols - Bit Oriented - HDLC Mechanism - Combined

BLM3051
Veri İletişimi
ve Bilgisayar
Ağları - 7

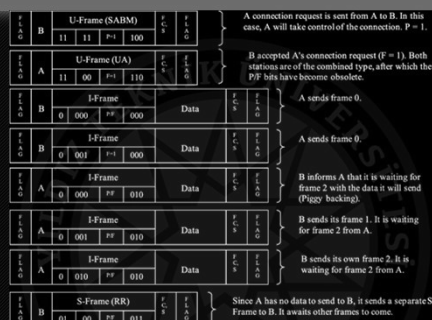

Dr. Öğr. Üyesi Furkan ÇAKMAK

Thank you for listening...

BLM3051
Veri İletişimi
ve Bilgisayar
Ağları - 7



Dr. Öğr. Üyesi Furkan ÇAKMAK