
DSC interface – Mosfet version

J1: 3-position 5.08 mm screw terminal, 22-16 AWG alarm wire

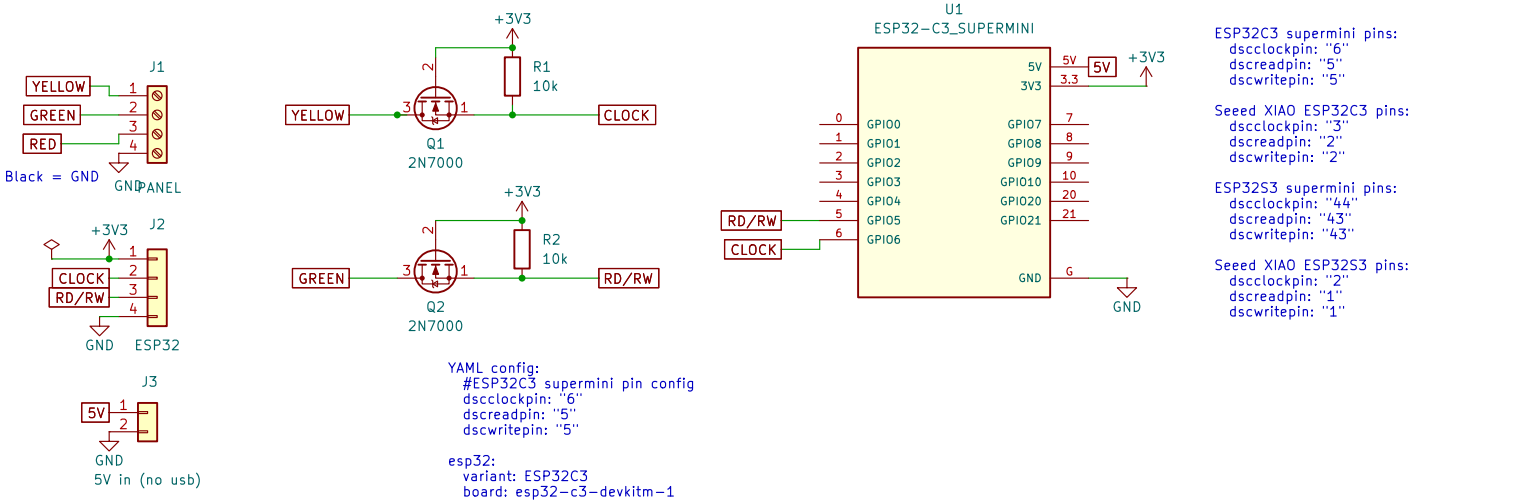

ESP32C3 supermini pins:
  dscclockpin: "6"
  dscreadpin: "5"
  dscwritepin: "5"

Seeed XIAO ESP32C3 pins:
  dscclockpin: "3"
  dscreadpin: "2"
  dscwritepin: "2"

ESP32S3 supermini pins:
  dscclockpin: "44"
  dscreadpin: "43"
  dscwritepin: "43"

Seeed XIAO ESP32S3 pins:
  dscclockpin: "2"
  dscreadpin: "1"
  dscwritepin: "1"

YAML config:
  #ESP32C3 supermini pin config
  dscclockpin: "6"
  dscreadpin: "5"
  dscwritepin: "5"

esp32:
  variant: ESP32C3
  board: esp32-c3-devkitm-1

Notes:
i: resistors r1,r2 connection can be omitted as the internal gpio will be set as input_pullup
ii: q1,q2 can be substituted for other low power N-channel Mosfets. Be careful of pin locations as some are reversed such as with the bs170.
iii: the yellow and green lines from the panel already have builtin 10k pullup resistors so none are needed on the interface.