

ECP (Honeywell/Ademco) interface – BJT version


J1: 4-position 5.08 mm screw terminal, 22-16 AWG alarm wire




Black = GND





Yellow in: 12V to 3.3V (inverting)

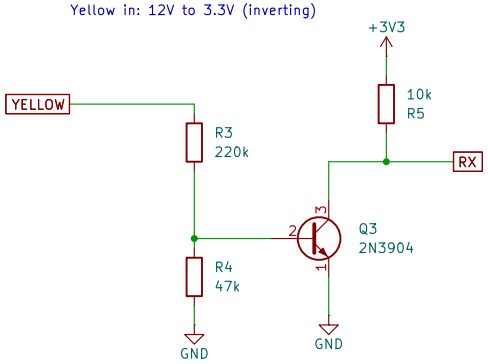

Green monitor: 12V to 3.3V (inverting)

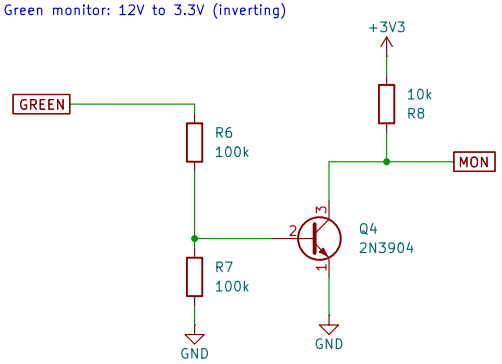

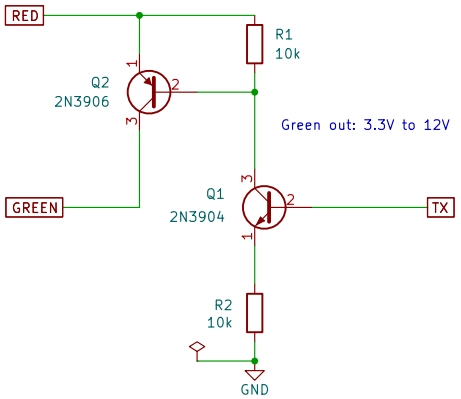

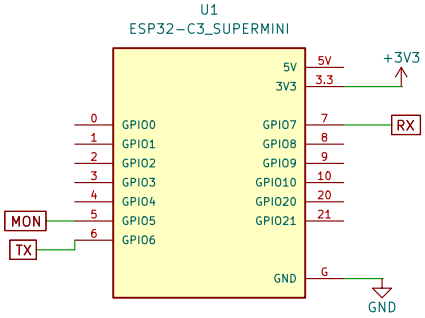

YAML config:

```
  invert_mon: "false"
  invert_rx: "false"
  invert_tx: "true"
  input_mode_rx: INPUT
  input_mode_mon: INPUT

  #ESP32C3 supermini pin config
  rxpin: 7
  txpin: 6
  monitorpin: 5

esp32:
  variant: ESP32C3
  board: esp32-c3-devkitm-1
```

Notes:
Since the internal logic already inverts the incoming data the above settings will be the reverse to what the circuit does.
i: resistors R5,R8 and the 3.3V connection can be omitted but you will need to set:
   input_mode_rx: INPUT_PULLUP
   input_mode_mon: INPUT_PULLUP
ii: q1,q2,q3 and q4 can be substituted for other common small signal transistors.
iii: you can substitute resistor values but keep it within about 10% of the value up or down. You may go down to 4.7k for all 10k resistors.
iv: Q2 2N3906 PNP, Q1/Q3/Q4 2N3904 NPN. TO-92 pin order E-B-C assumed, check datasheet.
v: RX and MON are pulled up to the ESP32 3.3V by R5 and R8.
   Yellow idles high (panel 10k pull-up, low ~0.7V).
   Green idles low (panel 10k pull-down, 0V).

ESP32C3 supermini pins:
rxpin: 7
txpin: 6
monitorpin: 5

Seeed XIAO ESP32C3 pins:
rxpin: 4
txpin: 3
monitorpin: 2

ESP32S3 supermini pins:
rxpin: 43
txpin: 44
monitorpin: 1

Seeed XIAO ESP32S3 pins:
rxpin: 3
txpin: 2
monitorpin: 1