




(/)

L298N Motor Driver Module

13 April 2020 - 0 Comments

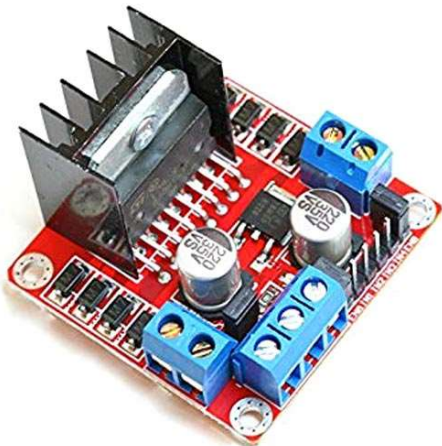

(/sites/default/files/components/L298N-Motor-Driver-Module.jpg)


L298N Motor Driver Module

[Click the image to enlarge it]

This **L298N Motor Driver Module** is a high power motor driver module for driving DC and Stepper Motors. This module consists of an L298 motor driver IC and a 78M05 5V regulator. **L298N Module** can control up to 4 DC motors, or 2 DC motors with directional and speed control.

L298N Module Pin Configuration:

Pin Name	Description
IN1 & IN2	Motor A input pins. Used to control the spinning direction of Motor A
IN3 & IN4	Motor B input pins. Used to control the spinning direction of Motor B

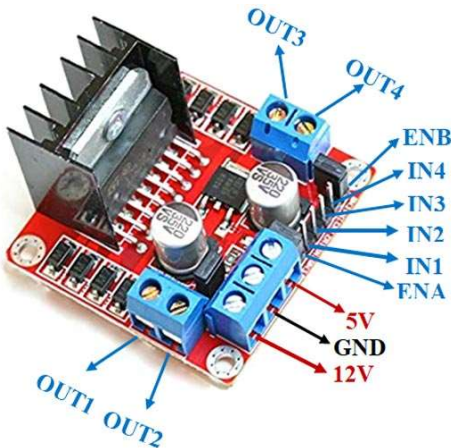

(/sites/default/files/component_pin/L298N-Module-Pinout.jpg)

L298N Motor Driver Module Pinout



(/)

OUT1 & OUT2	Output pins of Motor A
OUT3 & OUT4	Output pins of Motor B
12V	12V input from DC power Source
5V	Supplies power for the switching logic circuitry inside L298N IC
GND	Ground pin

L298 Module Features & Specifications:

- Driver Model: L298N 2A
- Driver Chip: Double H Bridge L298N
- Motor Supply Voltage (Maximum): 46V
- Motor Supply Current (Maximum): 2A
- Logic Voltage: 5V
- Driver Voltage: 5-35V
- Driver Current: 2A
- Logical Current: 0-36mA
- Maximum Power (W): 25W
- Current Sense for each motor
- Heatsink for better performance
- Power-On LED indicator


Alternate Driver Modules: TMC2209 (<https://components101.com/index.php/modules/tmc2209-stepper-motor-driver-module>), DRV8825 (<https://components101.com/index.php/modules/drv8825-stepper-motor-driver-module>), A4988, L9110S, DRV8711

Related Components: LM298 Motor Driver IC, 78M05 Voltage Regulator, Capacitors (<https://components101.com/index.php/capacitors>), Resistors (<https://components101.com/index.php/resistors>), Heat Sink

Brief about L298N Module



(/)

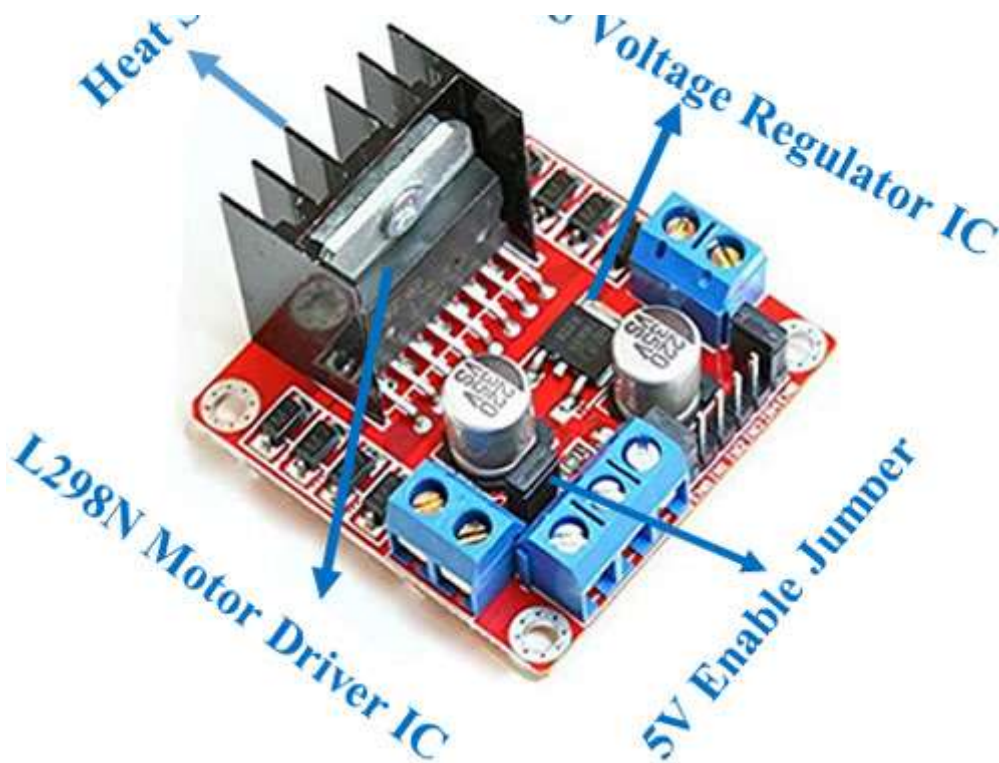


78M05 Voltage regulator will be enabled only when the jumper is placed. When the power supply is less than or equal to 12V, then the internal circuitry will be powered by the voltage regulator and the 5V pin can be used as an output pin to power the microcontroller. The jumper should not be placed when the power supply is greater than 12V and separate 5V should be given through 5V terminal to power the internal circuitry.

ENA & ENB pins are speed control pins for Motor A and Motor B while IN1& IN2 and IN3 & IN4 are direction control pins for Motor A and Motor B.

Internal circuit diagram of L298N Motor Driver module is given below:



(/)

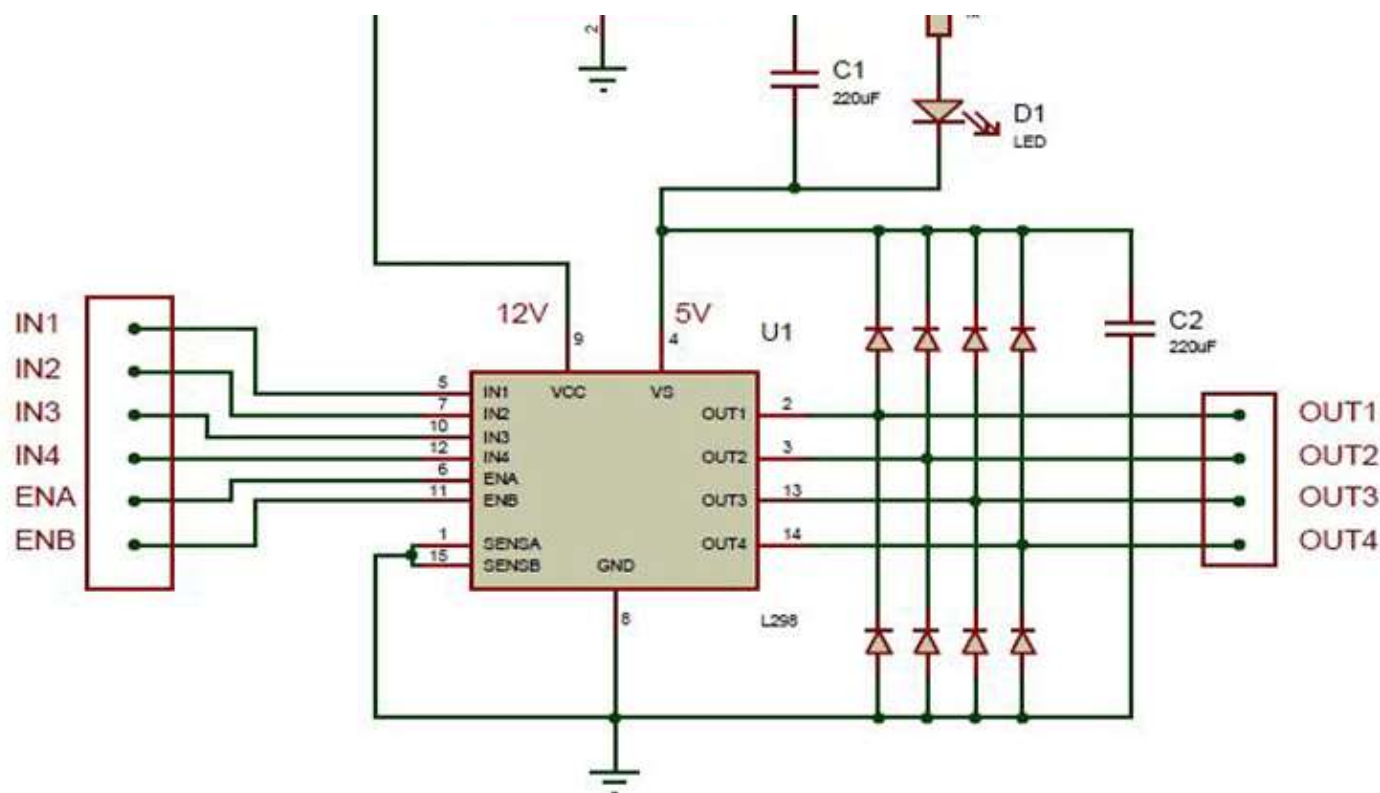

Applications of L298N Module

- Drive DC motors.
- Drive stepping motors
- In Robotics

Component Datasheet

L298N Motor Driver Module Datasheet

(https://components101.com/sites/default/files/component_datasheet/L298N-Motor-Driver-Datasheet.pdf)

Tags

MOTOR DRIVER (/TAGS/MOTOR-DRIVER)

STEPPER MOTOR DRIVER (/TAGS/STEPPER-MOTOR-DRIVER)

Get Our Weekly Newsletter!



(/)

Name**Subscribe**

(<https://bit.ly/35nm527>) **STM32F2 Series High-Performance Microcontrollers** (<https://bit.ly/3mmr1N9>)

STM32F2 MCUs use advanced 90 nm NVM process technology with an adaptive real-time memory accelerator

(<https://bit.ly/37jKsQl>) **STM32F4 Series High-Performance Microcontrollers** (<https://bit.ly/37jKsQl>)

STM32F4 MCUs leverage NVM technology to reach the highest benchmark scores for Cortex®-M-based MCUs

(<https://bit.ly/2KHxW0z>) **STM32F7 Series Very High-Performance Microcontrollers** (<https://bit.ly/2KHxW0z>)

STM32F7 devices deliver the maximum theoretical performance of the ARM® Cortex®-M7 Core

(<https://bit.ly/3mIKFJe>) **STM32 Development Boards** (<https://bit.ly/3mIKFJe>)

STM32 development boards implement the full range of device peripherals and features of STM32 MCUs

(<https://bit.ly/33pg6uH>) **STM32F0 Entry-Level ARM® Cortex®-M0 Microcontrollers** (<https://bit.ly/33pg6uH>)

STM32F0 MCUs offer real-time performance and low-power operation for cost-sensitive applications

(<https://bit.ly/33uwtWP>) **STM32F1 Series Mainstream Microcontrollers** (<https://bit.ly/33uwtWP>)

STM32F1 MCUs are ideal for an array of applications in the industrial, medical, and consumer markets

(<https://bit.ly/2Jlctz4>) **STM32F3 Series Mixed-Signal Microcontrollers** (<https://bit.ly/2Jlctz4>)

STM32F3 MCUs combine a 32-bit ARM® Cortex®-M4 core with a high number of integrated peripherals

(<https://bit.ly/39szmv5>) **STM32F32 Ecosystem** (<https://bit.ly/39szmv5>)



(/)



([https://www.pcbway.com/pcb-assembly.html?](https://www.pcbway.com/pcb-assembly.html?from=c101.com)

from=c101.com)

(<https://www.7pcb.com/>)



(<https://www.ourpcb.com/pcb-assembly>)



(/)

Quote in 24 Hrs!


Professional One-Stop Custom Wire Harness Manufacturer, You Can Definitely Trust.

Order Now



(<https://www.wiringo.com/wiring-harness.html>)

LATEST POSTS

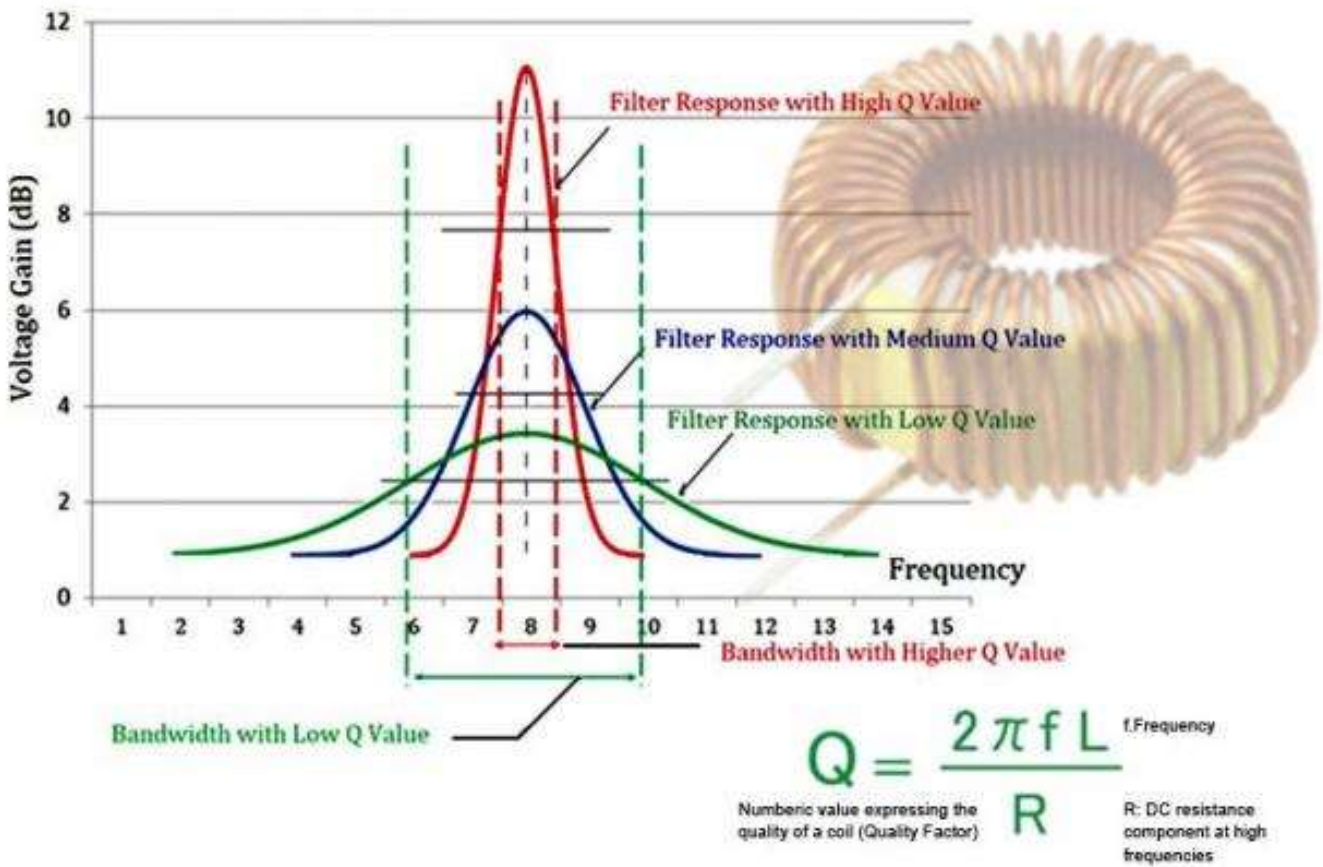


(/articles/how-does-quality-factor-impact-the-performance-of-an-inductor)

How does Quality Factor or Q-Factor Impact the Performance of an Inductor (/articles/how-does-quality-factor-impact-the-performance-of-an-inductor)



(/)

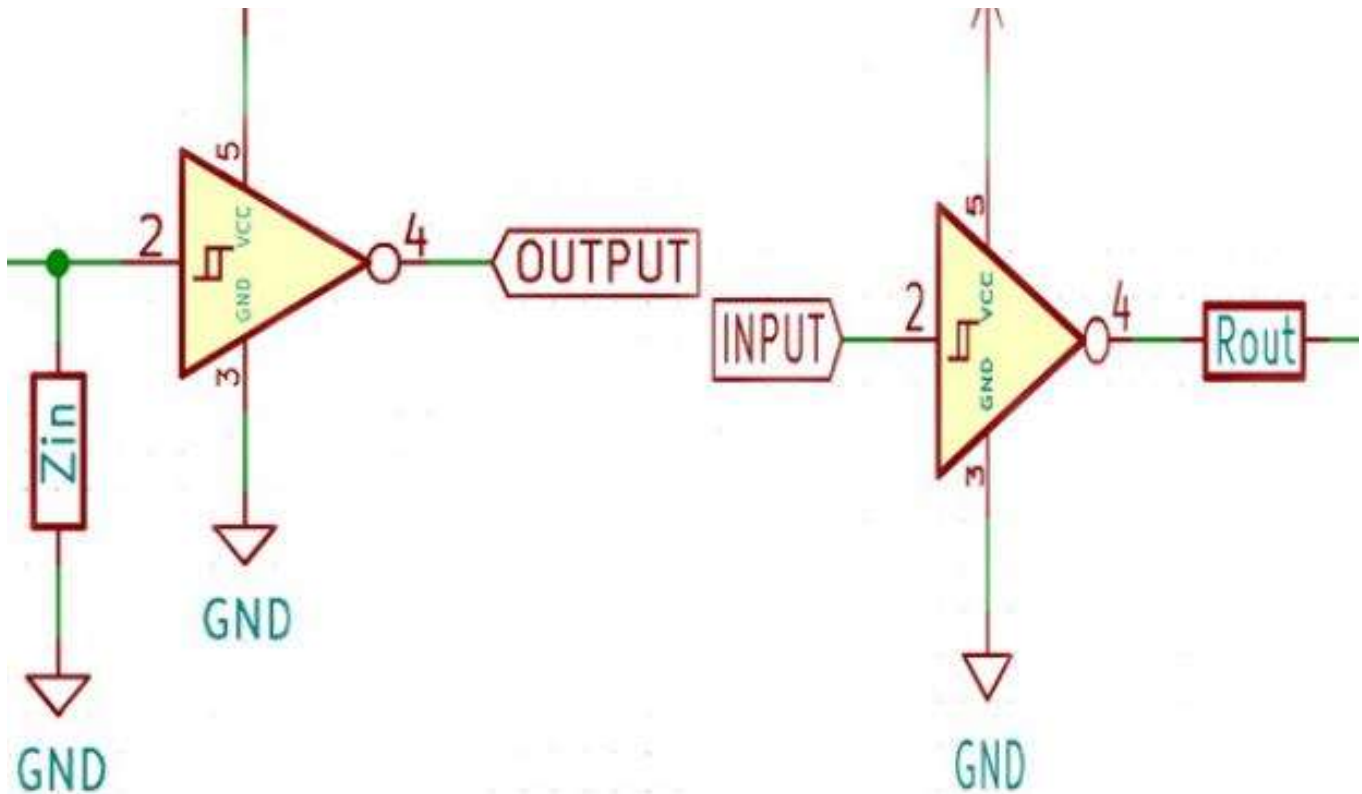


(/articles/how-does-input-impedance-and-output-impedance-affect-the-performance-of-an-operational-amplifier)

How does Input Impedance and Output Impedance Affect the Performance of an Operational Amplifier (/articles/how-does-input-impedance-and-output-impedance-affect-the-performance-of-an-operational-amplifier)



(/)

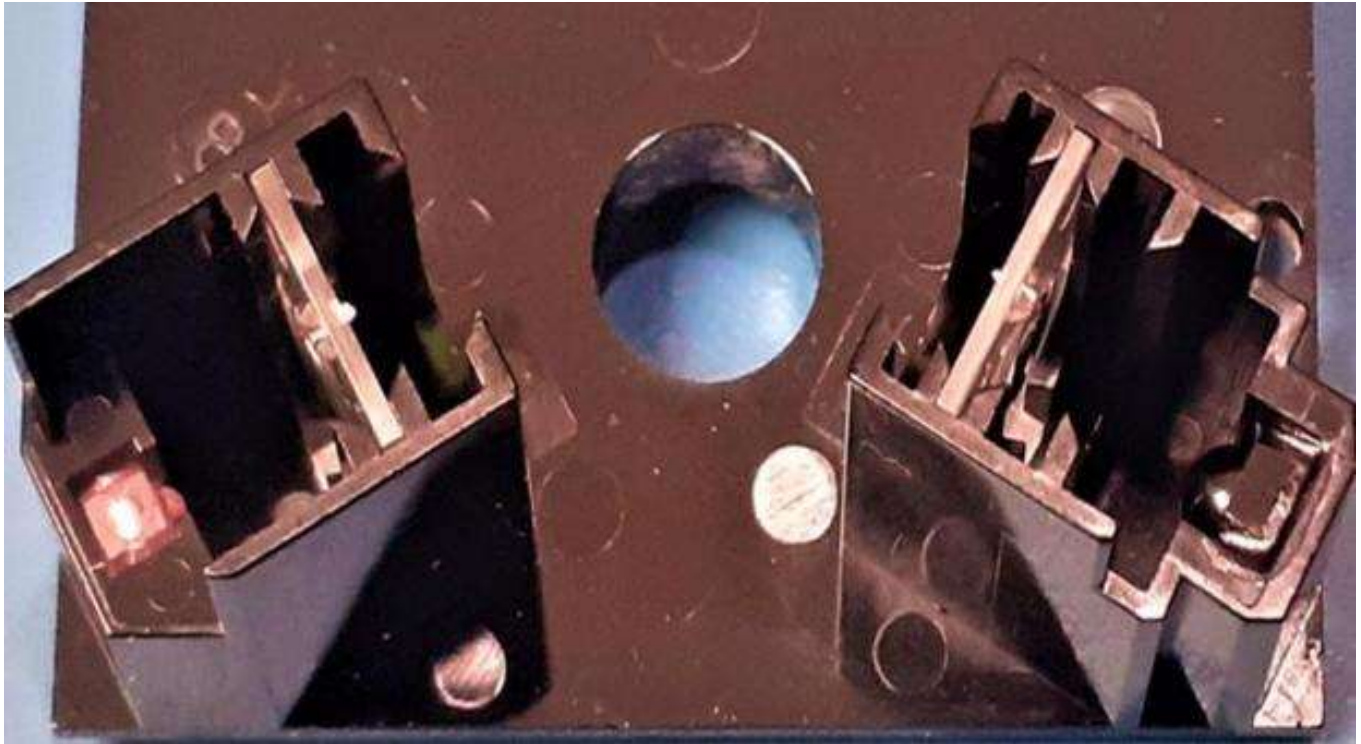

(/sensors/optical-dust-sensor-pinout-features-applications-working-datasheet)

Optical Dust Sensor - GP2Y1010AU0F (/sensors/optical-dust-sensor-pinout-features-applications-working-datasheet)

Components101 is a resource dedicated for electronics design engineers, covering product news, analysis and articles on latest electronics components.

IMPORTANT LINKS

- > [Contact](#)



(/)

- > [Cookie Policy](#)

POPULAR TAGS

[Power Electronics \(/tags/power-electronics\)](/tags/power-electronics)

[Automotive \(/tags/automotive\)](/tags/automotive)

[New Product \(/tags/new-product\)](/tags/new-product)

[NPN Transistor \(/tags/npn-transistor\)](/tags/npn-transistor)

[MOSFET \(/tags/mosfet\)](/tags/mosfet)

[IoT \(/tags/iot\)](/tags/iot)

SUBSCRIBE TO OUR NEWSLETTER

email address

Subscribe

Copyright 2020 © Components101. All rights reserved