

Blocks 1–2: USB-C (power + data), TP4057 charger with charge pause

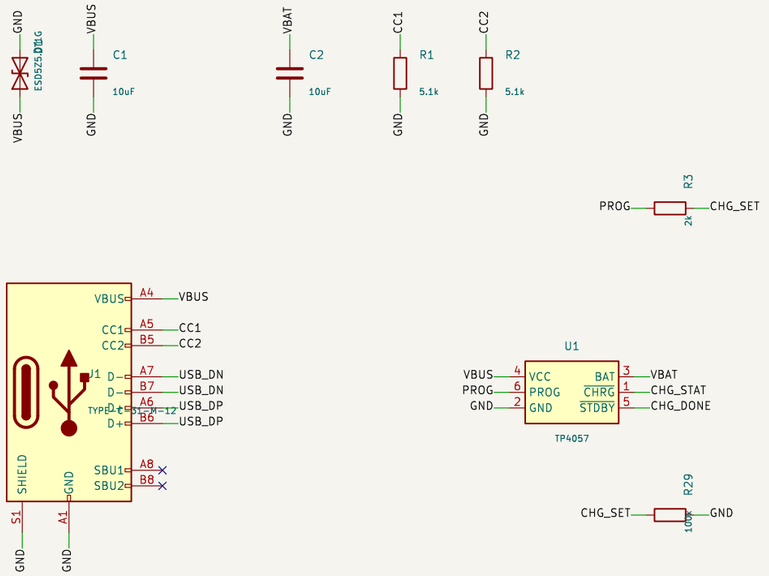


USB-C: Rd 5.1 k on CC1 and CC2 (5 V sink). D+/D− go to the ESP32-C3 native USB (flashing, console).
TP4057: R3 2.0 k returns PROG to CHG_SET (GPIO20): low = approx. 500 mA, floating = 10 mA trickle via R29, high = charger off (only while USB is present). CHRG/STDBY are read by GPIO4/GPIO5 (internal pull-ups).

Block 4: synchronous buck LED driver with cascaded current loop

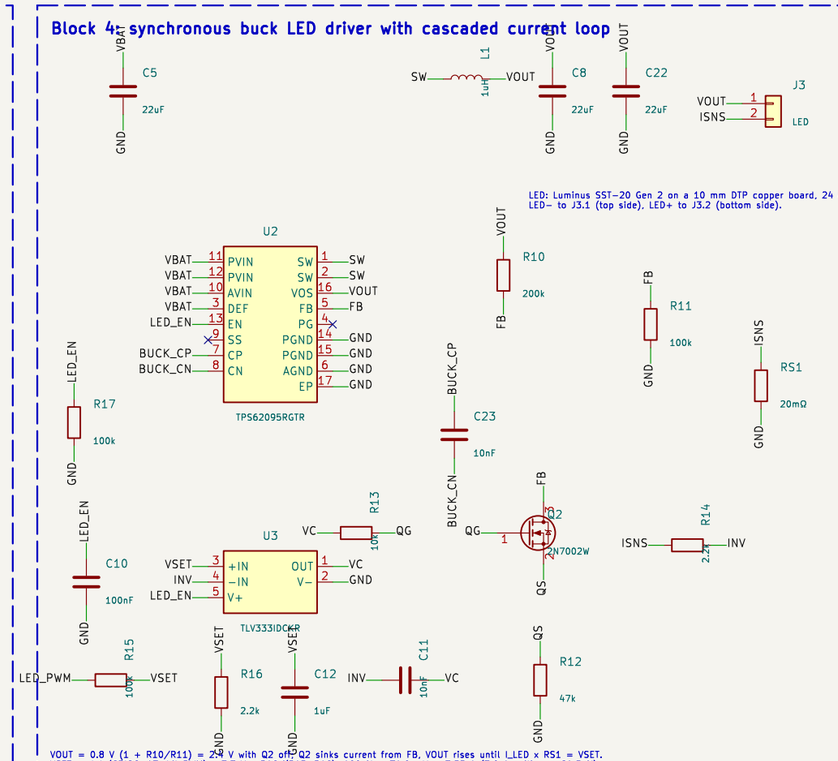


VOUT = 0.8 V (1 + R10/R11) = 2.8 V with Q2 off. Q2 sinks current from FB. VOUT rises until I_LED x RS1 = VSET.
VSET = duty(GPIO6, 13-bit PWM) x 3.3 V x R16/(R15+R16): 100 % = 71.0 mV = 3.55 A (3.0 A ceiling = 84.5 %).
U3 is powered from LED_EN. Kelvin: R14 from the top of RS1; R16, C12 and U3 pin 2 return to RS1's ground pad.

Block 6: ESP32-C3-MINI-1 (BLE, USB), NTC, VBAT sense, J6

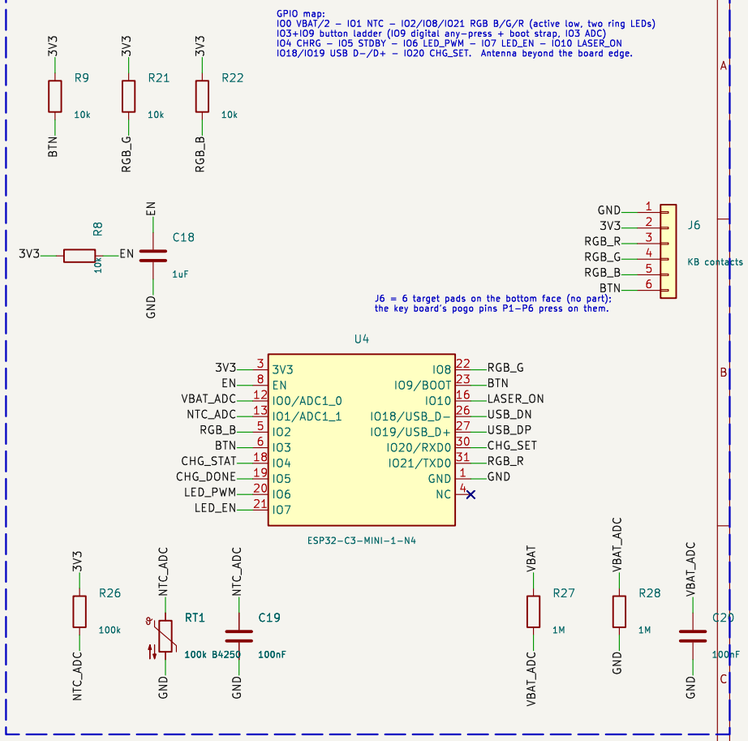


Block 3: cell pads, 3.3 V LDO, VBUS-edge reset

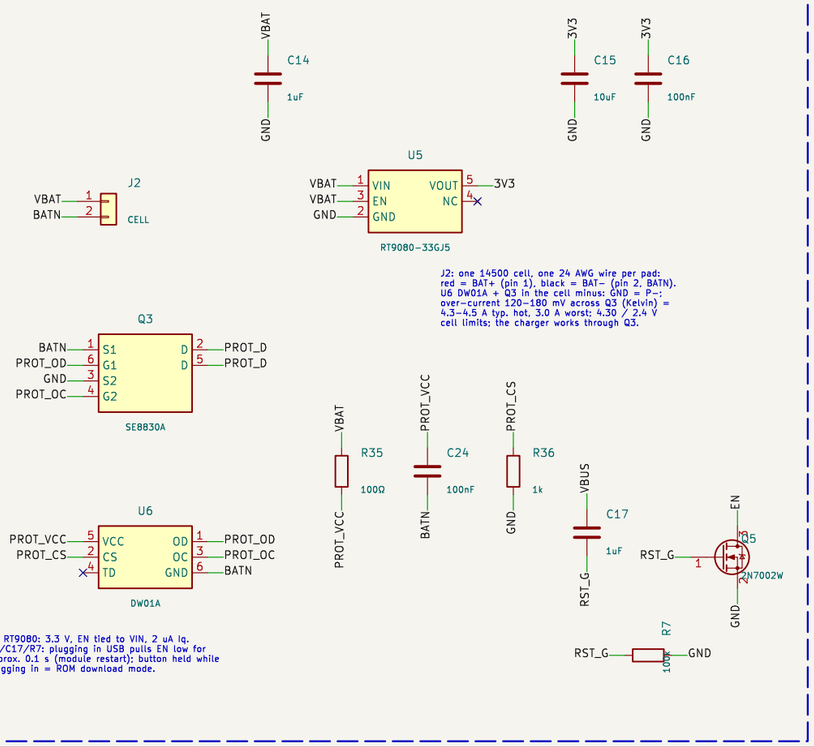


U5 RT9080: 3.3 V, EN tied to VIN, 2 uA Iq.
Q5/C17/R7: plugging in USB pulls EN low for approx. 0.1 s (module restart); button held while plugging in = ROM download mode.

Block 5: laser load switch with hardware interlock (gate path)

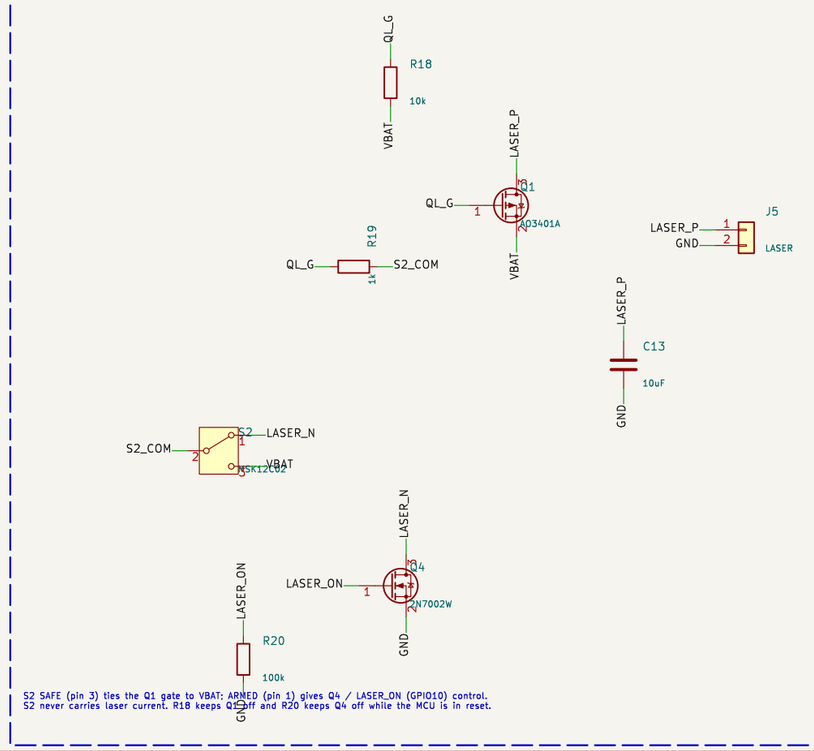

S2 SAFE (pin 3) ties the Q1 gate to VBAT; ARMED (pin 1) gives Q4 / LASER_ON (GPIO10) control.
S2 never carries laser current. R18 keeps Q1 off and R20 keeps Q4 off while the MCU is in reset.

Block 7: KEY BOARD (own PCB): buttons, ring LEDs, pogo pins

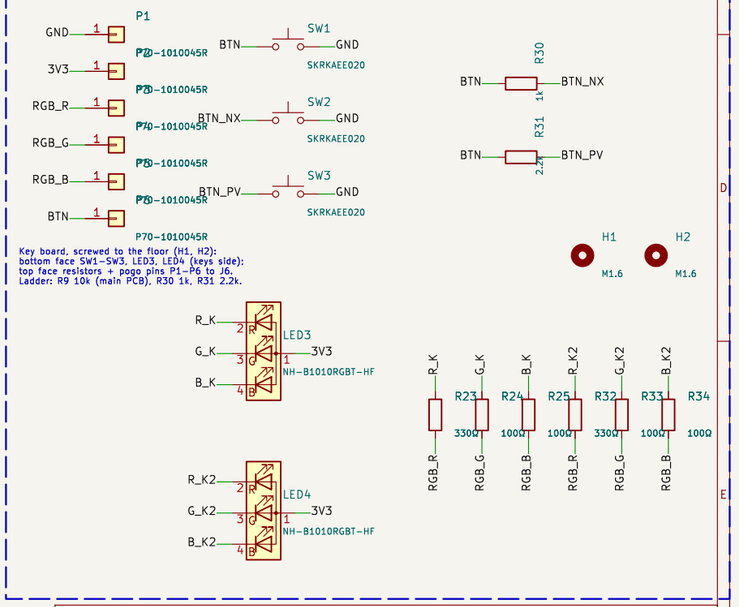

KiCad 7 projects kicad/FlashKa_main and kicad/FlashKa_keys; JLCPCB files in production/
Main PCB (blocks 1–6) and key board (block 7); source: tools/kicad/flashka_parts.py – nets connect

LuxLibre

Sheet: /
File: FlashKa_main.kicad_sch

Title: FlashKa Keychain v0.7

Size: A3	Date: 2026-10-21	**Rev: v0.7**
KiCad E.D.A.	kicad-cli 7.0.11+dfsg-1build4	Id: 1/1