



2. Headlight bulb socket conduct


- Install the bulb to the headlight socket.
- Connect the Pocket Tester ($\Omega \times 1$) to the headlight coupler (Black, Yellow and Green).

Tester (+) Lead → Yellow ② Lead

Tester (–) Lead → Black ① Lead

Tester (+) Lead → Green ③ Lead

Tester (–) Lead → Black ① Lead

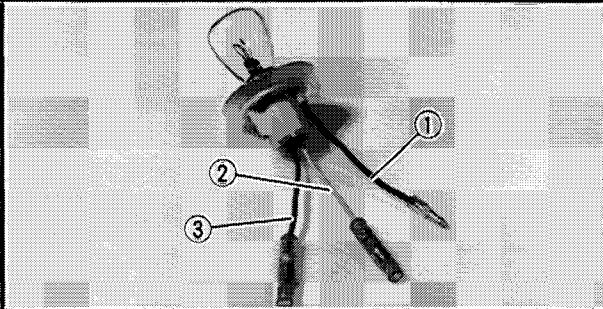

- Check the bulb socket for continuity.

CONTINUITY DOES NOT
EXIST ON ONE CIRCUIT.

Bulb socket is faulty, replace it.



CONTINUITY EXISTS
ON BOTH CIRCUITS.

3. "LIGHTS" (Dimmer) switch conduct.

- Disconnect the "LIGHTS" (Dimmer) switch coupler ① (Yellow/Red, Blue and Black) and headlight leads ② (Yellow and Green).
- Connect the Pocket Tester ($\Omega \times 1$) to the coupler and leads as shown.

A

Tester (+) Lead → Yellow/Red ⑤ Lead

Tester (–) Lead → Yellow ③ Lead

B

Tester (+) Lead → Yellow/Red ⑤ Lead

Tester (–) Lead → Green ④ Lead

