




Tester (+) Lead → Blue ① Lead
Tester (-) Lead → Black ② Lead

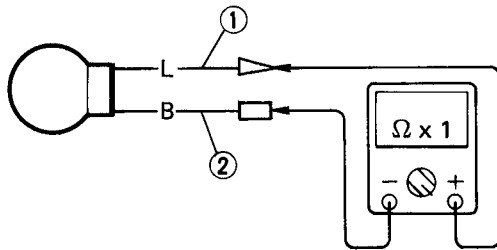

- Check the bulb socket for continuity.

NOCONTINUITY



Bulb socket is faulty, replace it.

CONTINUITY

3. "LIGHTS" (Dimmer) switch conduct

- Disconnect the "LIGHTS" (Dimmer) switch coupler ① (Yellow/Red, Blue and Black).
- Connect the Pocket Tester ($\Omega \times 1$) to the coupler as shown.

Tester (+) Lead → Blue ② Lead
Tester (-) Lead → Yellow/Red ③ Lead

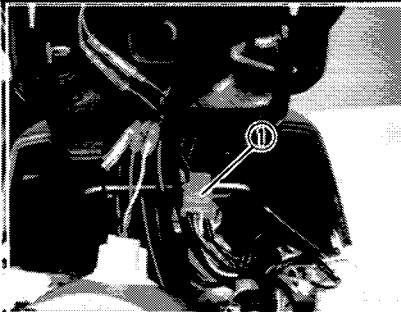

- Turn the "LIGHTS" (Dimmer) switch to "OFF", "LO" and "HI".
- Check the "LIGHTS" (Dimmer) switch for continuity.

BAD CONDITION

"LIGHTS" (Dimmer) switch is faulty, replace it.

Switch position	Good condition	Bad condition		
OFF	X	○	X	○
HI or LO	○	X	X	○
○: Continuity X: Nocontinuity				

GOOD CONDITION

*

7