
Conditional flowchart

Situation 2

Construct the flowchart to find the sum of given two numbers. (To achieve this, first the two numbers have to be received and kept in two places, under two names. Then the sum of them is to be found and printed. The flow chart for this is given in figure beside.)

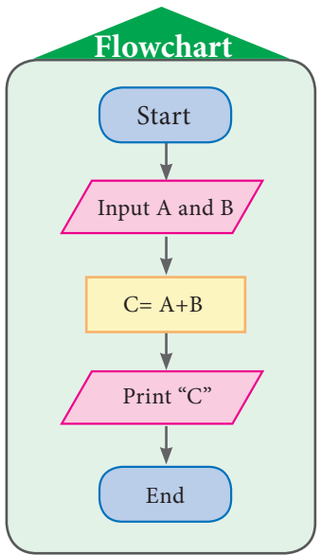

In the above flow chart, there is a special meaning in writing C = A + B. Here, the value of C indicates the sum of A and B values. For example, if we input **A = 325** and **B = 486** then the value of C will be printed as **811**. Let us learn more from following examples.

Example 6.2

Construct the flow chart to find whether the given number is a positive integer or negative integer or zero and write step by step process.


Solution

In this question we are asked to find the given integer **x** is a positive number or a negative number or a zero. For that, first we have to assign the value of **x** and check whether **x** is greater than 0. If '**yes**', we will print "**x is a Positive number".** If '**no**' then we will check again if the value of **x** is less than **0**. If 'yes', we will print "**x is a Negative number".** If 'no', then we will print "**x = zero".**

Step by Step process:

Step by Step process

- assign the value of **x**
- check **x > 0**
- if 'yes' print
- "**x is a Positive number**"
- check again **x < 0**
- if 'yes' print
- "**x is a Negative number**"
- if 'no' print **"x is equal to zero".**

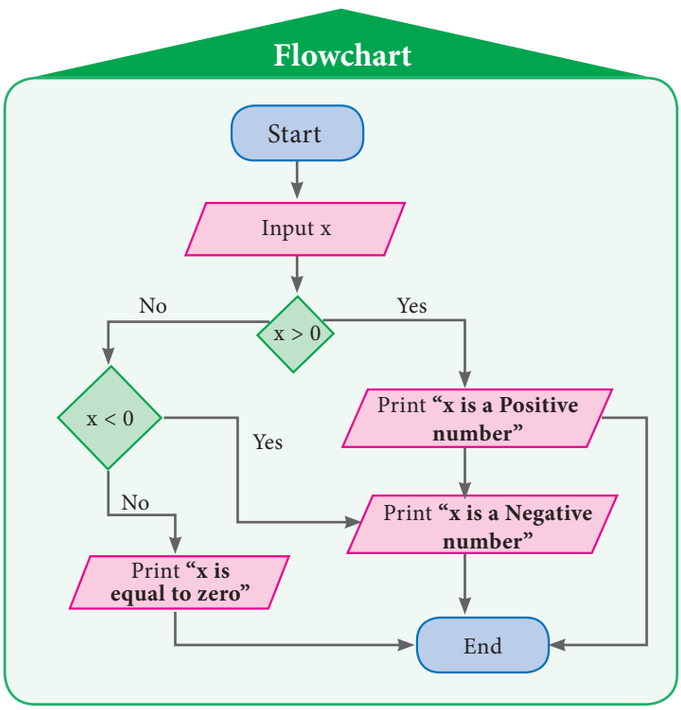

7th_Maths_IP_CH6.indd 120 05-11-2019 17:37:37