
We know that electricity is conducted by metals. This activity shows that liquids also conduct electricity. When electric current is passed through a conducing solution, some chemical reactions take place in the solution. This chemical reactions produce electrons which conduct electricity. This is called chemical effect of electric current. The decomposition of molecules of a solution into positive and negative ions on passing an electric current through it, is called electrolysis. Electrolysis has a number of applications. It is used in extraction and purification of metals. The most general use of electrolyte is electroplating.

Electroplating

Electroplating is one of the most common applications of chemical effects of electric current. The process of depositing a layer of one metal over the surface of another metal by passing electric current in called electroplating.

Activity 6

Take a glass jar and fill it with copper sulphate solution. Take a copper metal plate and connect it to the positive terminal of battery. Connect an iron spoon to the negative terminal of the battery. Now, dip them in the copper sulphate solution. When electric current is passed through the copper sulphate solution, you will find that a thin layer of copper metal is deposited on the iron spoon and an equivalent amount of copper is lost by the copper plate.

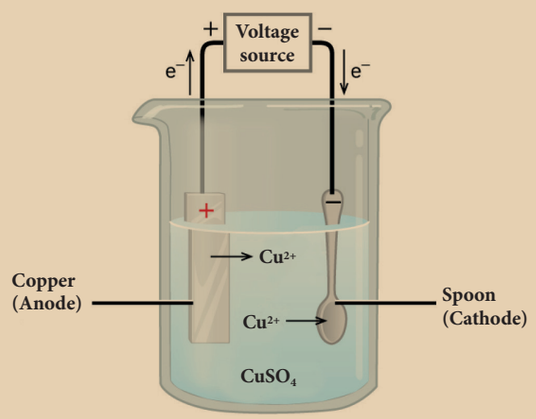


Electro plating is applied in many fields. We use iron in bridges and automobiles to provide strength. However, iron tends to corrode and rust. So, a coating of zinc is deposited on iron to protect it from corrosion and formation of rust. Chromium has a shiny appearance. It does not corrode. It resists scratches. But, chromium is expensive and it may not be economical to make the whole object out of chromium. So, the objects such as car parts, bath taps, kitchen gas burners, bicycle handlebars, wheel rims are made from a cheaper metal and only a coating of chromium is deposited over it.

5.8.2 Heating effect of current

Activity 7

Take a battery, a bulb, a switch and few connecting wires. Make an electric circuit as shown in the figure. Keep the switch in the 'OFF' position. Does the bulb glow? Now move the electric switch to the 'ON' position and let the bulb glow for a minute or so. Touch the bulb now. Do you feel the heat?



When electric current passes through a conductor, there is a considerable 'friction' between the moving electrons and the molecules of the conductor. During this process, electrical energy is transformed to heat energy. This is known as heating effect of electric current. The heat produced depends on the amount of resistance offered by the wire.

Copper wire offers very little resistance and does not get heated up quickly. On the other hand, thin wires of tungsten or nichrome which are used in bulbs offer high resistance and gets heated up quickly. This is

8th_Science_Unit-5_EM.indd 55 12/1/2022 3:24:58 PM