
4.4.2 Chemical effect

Activity 3



Take a beaker half filled with copper sulphate solution. Take a carbon rod from a used dry cell. Wind a wire on its upper end. Take a thick copper wire, clean it well and flatten it with a hammer. Immerse both the copper wire and carbon rod in the copper sulphate solution. Connect the carbon rod to the negative terminal of an electric cell and copper wire to the positive terminal of the cell. Also ensure that the copper and the carbon rod do not touch each other, but are close enough. Wait and watch. After some time you would find fine copper deposited over the carbon rod. This is called as electroplating. This is due to the chemical effect of current.

So far we have come across the cases in which only the electrons can conduct electricity. But, here when current passes through electrolyte like copper sulphate solution, both the electron and the positive copper ion conduct electricity. **The process of conduction of electric current through solutions is called 'electrolysis'. The solution through which the electricity passes is called 'electrolyte'.** The positive terminal inserted in to the solution is called 'anode' and the negative terminal 'cathode'. In the above experiment, copper wire is anode and carbon rod is cathode.

DO YOU KNOW?

Extremely weak electric current is produced in the human body by the movement of charged particles. These are called synaptic signals. These signals are produced by electro-chemical process. They travel between brain and the organs through nervous system.

4.4.3 Magnetic effect of electricity

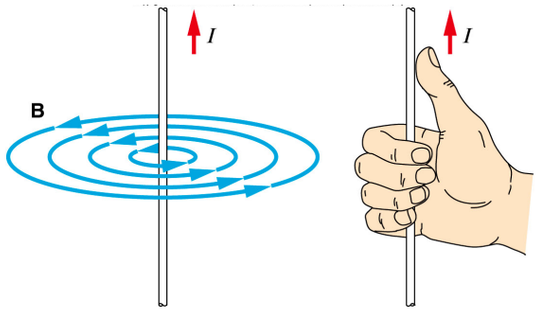


Figure 4.12 Direction of current and magnetic field

A wire or a conductor carrying current develops a magnetic field perpendicular to the direction of the flow of current. This is called magnetic effect of current. The discovery of the scientist Oersted and the 'right hand thumb rule' are detailed in the chapter on Magnetism and Electromagnetism in this book.

Direction of current is shown by the right hand thumb and the direction of magnetic field is shown by other fingers of the same right hand (Fig. 4.12).

4.5 Types of current

There are two distinct types of electric currents that we encounter in our everyday life: direct current (dc) and alternating current (ac).

4.5.1 Direct current

We know current in electrical circuits is due to the motion of positive charge from higher potential to lower potential or electron from lower to higher electrical potential. Electrons move from negative terminal of the battery to positive of the battery. Battery is used to maintain a potential difference between the two ends of the wire. Battery is one of the sources for dc current. The dc is due to the unidirectional flow of electric charges. Some other sources of dc are solar cells, thermocouples etc. The graph depicting the direct current is shown in Figure 4.13.

IX_SCI_EM_Unit-04_PHY.indd 46 12/7/2022 5:01:32 PM