one brush is at all times in contact with the arm moving up in the field while the other is in contact with the arm moving down. Thus, a unidirectional current is produced. The generator is thus called a DC generator (Figure 5.19).

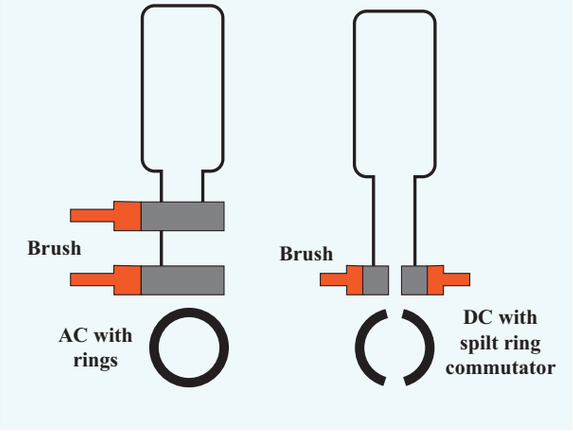


Figure 5.19 Comparison of AC and DC generators

5.9 Transformer

Transformer is a device used for converting low voltage into high voltage and high voltage into low voltage. It works on the principle of electromagnetic induction. It consists of primary and secondary coil insulated from each other. The alternating current flowing through the primary coil induces magnetic field in the iron ring. The magnetic field of the iron ring induces a varying emf in the secondary coil.

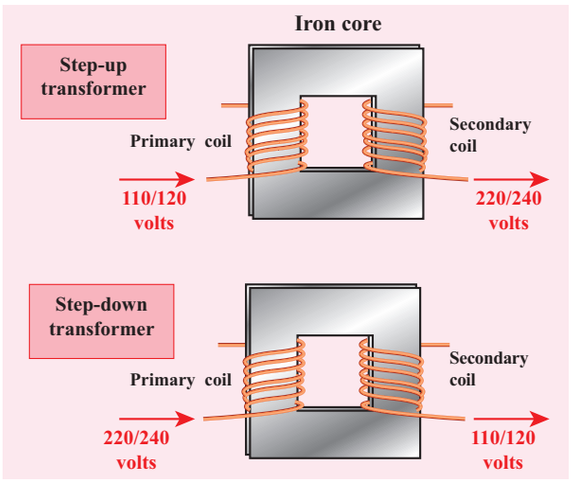


Figure 5.20 Step up and step down transformers

Depending upon the number of turns in the primary and secondary coils, we can step-up or step-down the voltage in the secondary coil as shown in Figure 5.20.

Step up transformer: The transformer used to change a low alternativing voltage to a high alternating voltage is called a step up transformer. ie Vs > Vp. In a step up transformer, the number of turns in the secondary coil is more than the number of turns in the primary coil (Ns > Np).

Step down transformer: The transformer used to change a high alternating voltage to a low alternating voltage is called a step down transformer (Vs < Vp). In a step down transformer, the number of turns in the secondary coils are less than the number of turns in the primary coil (Ns < Np).



A step up transformer increases the voltage but it decreases the current and vice versa. Basically there will be loss of energy in a transformer in the form of heat, sound etc.

The formulae pertaining to the transformers are given in the following equations.

$$\frac{\text{Number of primary turns } N_p}{\text{Number of secondary turns } N_s} = \frac{\text{Primary voltage } V_p}{\text{Secondary voltage } V_s}$$

$$\frac{\text{Number of secondary turns } N_s}{\text{Number of primary turns } N_p} = \frac{\text{Primary current } I_p}{\text{Secondary current } I_s}$$

A transformer cannot be used with the direct current (DC) source because, current in the primary coil is constant (ie. DC). Then there will be no change in the number of magnetic field lines linked with the secondary coil and hence no emf will be induced in the secondary coil.

IX_SCI_EM_Unit-05_PHY.indd 61 30/11/2022 19:23:01