


**Figure 5.8** Force on a current carrying conductor kept in magnetic field

If a current, I is flowing through a conductor of length, L kept perpendicular to the magnetic field B, then the force F experienced by it is given by the equation,

$$F = I\ L\ B$$

The above equation indicates that the force is proportional to current through the conductor, length of the conductor and the magnetic field in which the current carrying conductor is kept.

**Note:** The angle of inclination between the current and magnetic field also affects the magnetic force. When the conductor is perpendicular to the magnetic field, the force will be maximum (=BIL). When it is parallel to the magnetic field, the force will be zero.

The force is always a vector quantity. A vector quantity has both magnitude and direction. It means we should know the direction in which the force would act. The direction is often found using what is known as Fleming's Left hand Rule (formulated by the scientist John Ambrose Fleming).

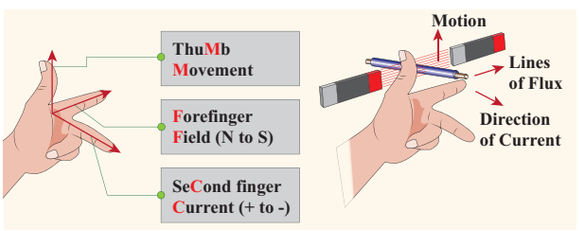



**Figure 5.9** Fleming's left hand rule

The law states that while stretching the three fingers of left hand in perpendicular manner with each other, if the direction of the current is denoted by the middle finger of the left hand and the second finger is for direction of the magnetic field, then the thumb of the left hand denotes the direction of the force or movement of the conductor (Fig. 5.9)

**Problem 1**

A conductor of length 50 cm carrying a current of 5 A is placed perpendicular to a magnetic field of induction $2\times10^{-3}$ T. Find the force on the conductor.

**Solution:**

Force on the conductor = ILB

$$= 5 \times 50 \times 10^{-2} \times 2 \times 10^{-3}$$

$$= 5 \times 10^{-3}\ \text{N}$$

**Problem 2**

A current carrying conductor of certain length, kept perpendicular to the magnetic field experiences a force F. What will be the force if the current is increased four times, length is halved and magnetic field is tripled?

**Solution:**

$F = I\ L\ B = (4I) \times (L/2) \times (3\ B) = 6\ F$

Therefore, the force increases six times.

## 5.5 Force on parallel current carrying conductors

We have seen that a current carrying conductor has a magnetic field around it. If we place another conductor carrying current parallel to the first one, the second conductor will experience a force due to the magnetic field of the first conductor. Similarly, the first conductor will experience a force due to the magnetic field of the second conductor. These two forces will be equal in magnitude and opposite in direction.



IX_SCI_EM_Unit-05_PHY.indd 56 30/11/2022 19:22:57