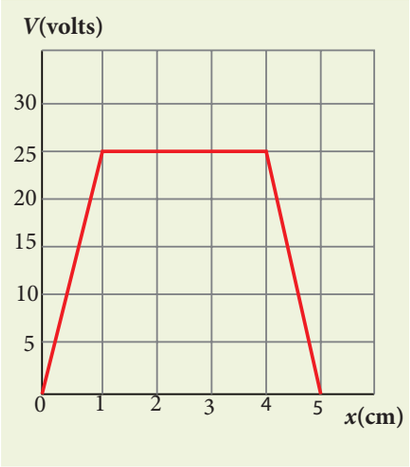


Solution


In the given problem, since the potential depends only on x, we can use $\vec{E} = -\frac{dV}{dx}\hat{i}$ (the other two terms $\frac{\partial V}{\partial y}$ and $\frac{\partial V}{\partial z}$ are zero)

From 0 to 1 cm, the slope is constant and so $\frac{dV}{dx} = 25\,\text{V cm}^{-1}$. So $\vec{E} = -25\,\text{V cm}^{-1}\hat{i}$

From 1 to 4 cm, the potential is constant, V = 25 V. It implies that $\frac{dV}{dx} = 0$. So $\vec{E} = 0$

From 4 to 5 cm, the slope $\frac{dV}{dx} = -25\,\text{V cm}^{-1}$. So $\vec{E} = +25\,\text{V cm}^{-1}\hat{i}$.

The plot of electric field for the various points along the x axis is given below.

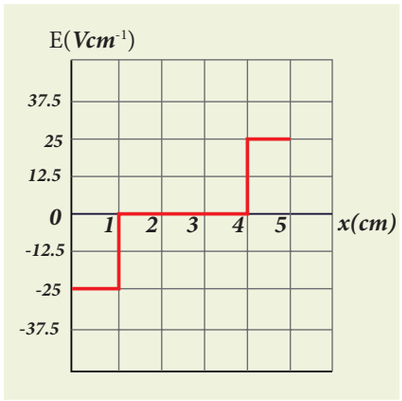

1.5.6 Electrostatic potential energy for collection of point charges

The electric potential at a point at a distance r from point charge q_1 is given by

$$V = \frac{1}{4\pi\epsilon_\circ}\frac{q_1}{r}$$

This potential V is the work done to bring a unit positive charge from infinity to the point. Now if the charge q_2 is brought from infinity to that point at a distance r from q_1, the work done is the product of q_2 and the electric potential at that point. Thus we have

$$W = q_2 V$$

This work done is stored as the electrostatic potential energy U of a system of charges q_1 and q_2 separated by a distance r. Thus we have

$$U = q_2 V = \frac{1}{4\pi\epsilon_\circ}\frac{q_1 q_2}{r} \qquad (1.45)$$

The electrostatic potential energy depends only on the distance between the two point charges. In fact, the expression (1.45) is derived by assuming that q_1 is fixed and q_2 is brought from infinity. The equation (1.45) holds true when q_2 is fixed and q_1 is brought from infinity or both q_1 and q_2 are simultaneously brought from infinity to a distance r between them.

Three charges are arranged in the following configuration as shown in Figure 1.28.

To calculate the total electrostatic potential energy, we use the following procedure. We bring all the charges one by one and arrange them according to the configuration as shown in Figure 1.28.

12th Physics_Vol-1_Unit 1_English Medium.indd 33 08-12-2022 11:03:22