current is known as Joule's heating effect. Just as current produces thermal energy, thermal energy may also be suitably used to produce an electromotive force. This is known as thermoelectric effect.

2.6.1 Joule's law

If a current I flows through a conductor kept across a potential difference V for a time t, the work done or the electric potential energy spent is

$$W = VIt \qquad (2.66)$$

In the absence of any other external effect, this energy is spent in heating the conductor. The amount of heat(H) produced is

$$H = VIt \qquad (2.67)$$

For a resistance R,

$$H = I^2Rt \qquad (2.68)$$

This relation was experimentally verified by Joule and is known as Joule's law of heating. It states that **the heat developed in an electrical circuit due to the flow of current varies directly as**

(i) the square of the current
(ii) the resistance of the circuit and
(iii) the time of flow.

EXAMPLE 2.27

Find the heat energy produced in a resistance of 10 Ω when 5 A current flows through it for 5 minutes.

Solution

$R = 10\ \Omega$, $I = 5$ A, $t = 5$ minutes $= 5 \times 60$ s

$H = I^2Rt$

$= 5^2 \times 10 \times 5 \times 60$

$= 25 \times 10 \times 300$

$= 25 \times 3000$

$= 75000$ J (or) 75 kJ

2.6.2 Application of Joule's heating effect

1. Electric heaters

Electric iron, electric heater, electric toaster shown in Figure 2.30 are some of the home appliances that utilize the heating effect of current. In these appliances, the heating elements are made of nichrome, an alloy of nickel and chromium. Nichrome has a high specific resistance and can be heated to very high temperatures without oxidation.

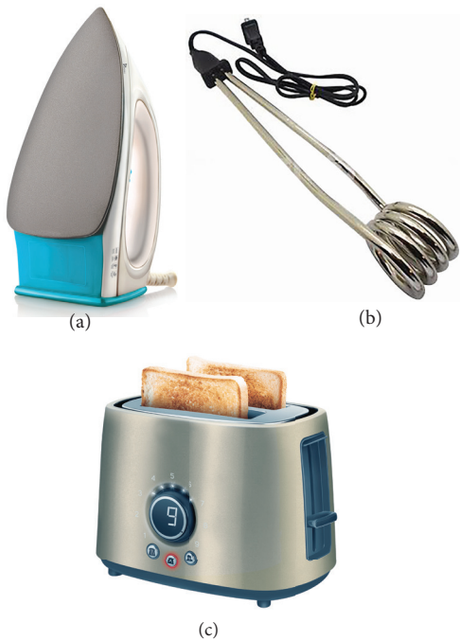


Figure 2.30 (a) Electric Iron box, (b) electric heater (c) electric Toaster

EXAMPLE 2.28

An electric heater of resistance 10 Ω connected to 220 V power supply is immersed in the water of 1 kg. How long the electrical heater has to be switched on to increase its temperature from 30°C to 60°C. (Specific heat capacity of water is $s = 4200$ J kg^{-1} K^{-1})

12th Physics_Vol-1_Unit 2_English Medium.indd 112 12-12-2022 17:25:40