




...

Open with

Q.1

Implement Inter-VLAN Routing

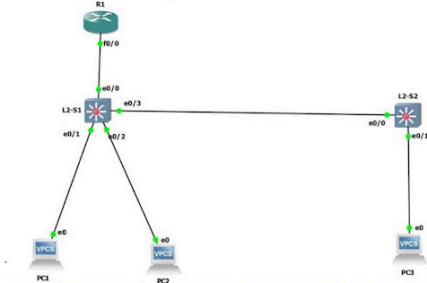

(40)

Device	Interface	IP Address	Subnet Mask	Default Gateway
R1	E0/0.5	192.168.5.1	255.255.255.0	N/A
	E0/0.10	192.168.10.1	255.255.255.0	
S1	VLAN 5 (E0/1) VLAN 10 (E0/2) TRUNK (E0/3)	-	-	-
S2	VLAN 5 (E0/1) TRUNK (E0/0)	-	-	-
PC-1	NIC	192.168.5.5	255.255.255.0	192.168.5.1
PC-2	NIC	192.168.10.1	255.255.255.0	192.168.10.1
PC-3	NIC	192.168.5.10	255.255.255.0	192.168.5.1

Journal

(05)

Viva

(05)






...

Open with

Q.1

Implement Inter-VLAN Routing

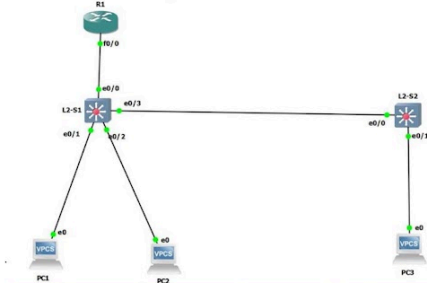

(40)

Device	Interface	IP Address	Subnet Mask	Default Gateway
R1	E0/0/0	192.168.5.1	255.255.255.0	N/A
	E0/0/10	192.168.10.1	255.255.255.0	
S1	VLAN 5 (E0/1) VLAN 10 (E0/2) TRUNK (E0/3)	-	-	-
S2	VLAN 5 (E0/1) TRUNK (E0/0)	-	-	-
PC-1	NIC	192.168.5.5	255.255.255.0	192.168.5.1
PC-2	NIC	192.168.10.1	255.255.255.0	192.168.10.1
PC-3	NIC	192.168.5.10	255.255.255.0	192.168.5.1

Journal

(05)

Viva

(05)

