
We know that $\Phi_B = BA\cos\theta$

$$\Phi_B = 4.1 \times 10^{-5} \times 3 \times \cos 43^{\circ}$$
$$= 4.1 \times 10^{-5} \times 3 \times 0.7314$$
$$= 89.96\ \mu\text{Wb}$$

EXAMPLE 4.2

A circular loop of area $5 \times 10^{-2}\ m^2$ rotates in a uniform magnetic field of 0.2 T. If the loop rotates about its diameter which is perpendicular to the magnetic field as shown in figure. Find the magnetic flux linked with the loop when its plane is (i) normal to the field (ii) inclined 60° to the field and (iii) parallel to the field.

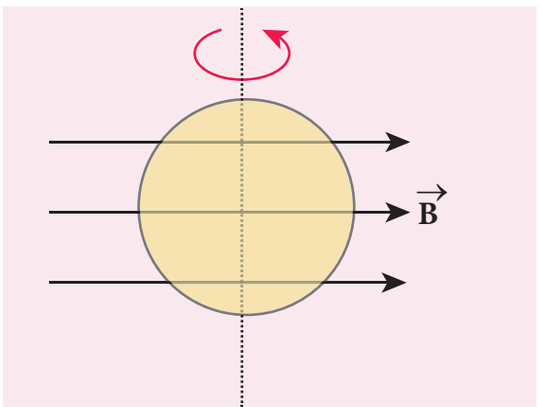

Solution

$A = 5 \times 10^{-2}\ m^2$; $B = 0.2$ T

(i) $\theta = 0^{\circ}$;

$$\Phi_B = BA\cos\theta = 0.2 \times 5 \times 10^{-2} \times \cos 0^{\circ}$$
$$\Phi_B = 1 \times 10^{-2}\ \text{Wb}$$

(ii) $\theta = 90^{\circ} - 60^{\circ} = 30^{\circ}$;

$$\Phi_B = BA\cos\theta = 0.2 \times 5 \times 10^{-2} \times \cos 30^{\circ}$$
$$\Phi_B = 1 \times 10^{-2} \times \frac{\sqrt{3}}{2} = 8.66 \times 10^{-3}\ \text{Wb}$$

(iii) $\theta = 90^{\circ}$;

$$\Phi_B = BA\cos 90^{\circ} = 0$$

4.1.3 Faraday's Experiments on Electromagnetic Induction

First Experiment

Consider a closed circuit consisting of a coil *C* of insulated wire and a galvanometer *G* (Figure 4.2(a)). The galvanometer does not indicate deflection as there is no electric current in the circuit.

When a bar magnet is inserted into the stationary coil, with its north pole facing the coil, there is a momentary deflection in the galvanometer. This indicates that an electric current is set up in the coil (Figure 4.2(b)). If the magnet is kept stationary inside the

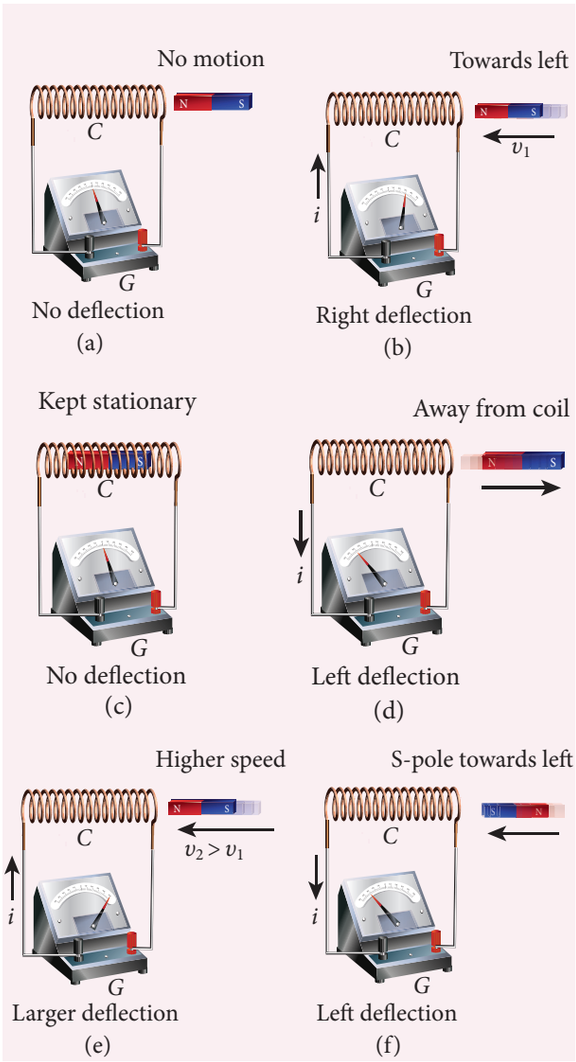


Figure 4.2 Faraday's first experiment

12th Physics_Vol-1_Unit 4_English Medium.indd 197 23-12-2022 17:56:33