**Note**

Interestingly, sine waves are very common in nature. The periodic motions like waves in water, swinging of pendulum are associated with sine waves. Thus sine wave seems to be nature's standard. Also refer unit 11 of XI physics text book.

## 4.7.2 Mean or Average value of AC

The current and voltage in a DC system remain constant over a period of time so that there is no problem in specifying their magnitudes. However, an alternating current or voltage varies from time to time. Then a question arises how to express the magnitude of an alternating current or voltage. Though there are many ways of expressing it, we limit our discussion with two ways, namely mean value and RMS (Root Mean Square) value of AC.

### Mean or Average value of AC

We have learnt that the magnitude of an alternating current in a circuit changes from one instant to other instant and its direction also reverses for every half cycle. During positive half cycle, current is taken as positive and during negative cycle it is negative. Therefore mean or average value of symmetrical alternating current over one complete cycle is zero.

Therefore the average or mean value is measured over one half of a cycle. These electrical terms, average current and average voltage, can be used in both AC and DC circuit analysis and calculations.

**The average value of alternating current is defined as the average of all values of current over a positive half-cycle or a negative half-cycle.**

The instantaneous value of sinusoidal alternating current is given by the equation $i = I_m \sin\omega t$ or $i = I_m \sin\theta$ (where $\theta = \omega t$) whose graphical representation is given in Figure 4.36.

The sum of all currents over a half-cycle is given by area of positive half-cycle (or negative half-cycle). Therefore,

$$I_{av} = \frac{\text{Area of positive half-cycle (or negative half-cycle)}}{\text{Base length of half-cycle}} \qquad (4.31)$$

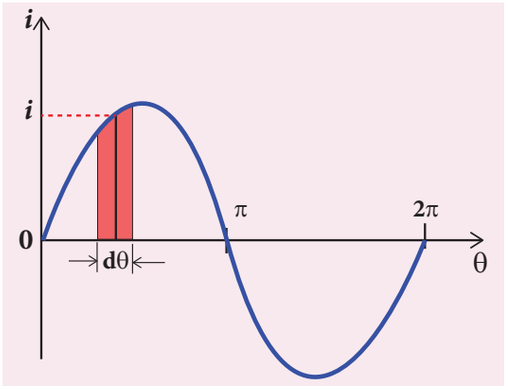



**Figure 4.36** Sine wave of an alternating current

Consider an elementary strip of thickness $d\theta$ in the positive half-cycle of the current wave (Figure 4.41). Let $i$ be the mid-ordinate of that strip.

Area of the elementary strip = $i\, d\theta$

Area of positive half-cycle

$$= \int_0^{\pi} i d\theta = \int_0^{\pi} I_m \sin\theta d\theta$$

$$= I_m\left[-\cos\theta\right]_0^{\pi} = -I_m\left[\cos\pi - \cos 0\right] = 2I_m$$

The base length of half-cycle is π. Substituting these values in equation (4.31), we get

$$\text{Average value of AC, } I_{av} = \frac{2I_m}{\pi}$$

$$I_{av} = 0.637\, I_m \qquad (4.32)$$



12th Physics_Vol-1_Unit 4_English Medium.indd 234 23-12-2022 17:57:56