Hence the average value of AC is 0.637 times the maximum value I_m of the alternating current. For negative half-cycle, $I_{av} = -0.637\, I_m$.

Note

For example, if we consider n currents in a half-cycle of AC, namely $i_1, i_2, \ldots i_n$, then average value is given by

$$I_{av} = \frac{\text{Sum of all currents over half-cycle}}{\text{Number of currents}}$$

$$I_{av} = \frac{i_1 + i_2 + \ldots + i_n}{n}$$

4.7.3 RMS value of AC

The term RMS refers to time-varying sinusoidal currents and voltages which is not used in DC systems.

The root mean square value of an alternating current is defined as the square root of the mean of the squares of all currents over one cycle. It is denoted by I_{RMS}. For alternating voltages, the RMS value is given by V_{RMS}.

The alternating current $i = I_m \sin\omega t$ or $i = I_m \sin\theta$, is represented graphically in Figure 4.37. The corresponding squared current wave is also shown by the dotted lines.

The sum of the squares of all currents over one cycle is given by the area of one cycle of squared wave. Therefore,

$$I_{RMS} = \sqrt{\frac{\text{Area of one cycle of squared wave}}{\text{Base length of one cycle}}} \qquad (4.33)$$

An elementary area of thickness $d\theta$ is considered in the first half-cycle of the squared current wave as shown in Figure 4.37. Let i^2 be the mid-ordinate of the element.

Area of the element = $i^2 d\theta$

Area of one cycle of squared wave

$$= \int_0^{2\pi} i^2 d\theta$$

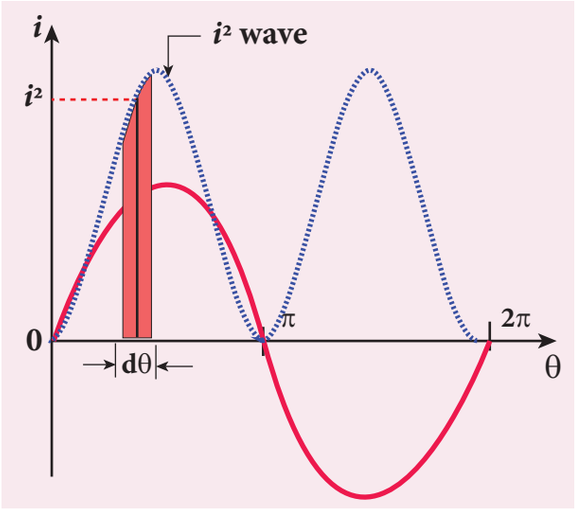


Figure 4.37 Squared wave of AC

$$= \int_0^{2\pi} I_m^2 \sin^2\theta d\theta = I_m^2 \int_0^{2\pi} \sin^2\theta d\theta \qquad (4.34)$$

$$= I_m^2 \int_0^{2\pi} \left[\frac{1-\cos 2\theta}{2}\right] d\theta$$

since $\sin^2\theta = \frac{1-\cos 2\theta}{2}$

$$= \frac{I_m^2}{2}\left[\int_0^{2\pi} d\theta - \int_0^{2\pi} \cos 2\theta d\theta\right]$$

$$= \frac{I_m^2}{2}\left[\theta - \frac{\sin 2\theta}{2}\right]_0^{2\pi}$$

$$= \frac{I_m^2}{2}\left[\left(2\pi - \frac{\sin 2\times 2\pi}{2}\right) - \left(0 - \frac{\sin 0}{2}\right)\right]$$

$$= \frac{I_m^2}{2} \times 2\pi = I_m^2 \pi \qquad [\because \sin 0 = \sin 4\pi = 0]$$

The base length of one cycle is 2π. Substituting these values in equation (4.33), we get

12th Physics_Vol-1_Unit 4_English Medium.indd 235 23-12-2022 17:58:01