

www.tntextbooks.in

EXAMPLE 3.14

The magnetic field shown in the figure is due to the current carrying wire. In which direction does the current flow in the wire?.

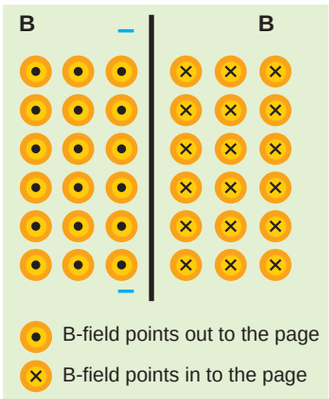

Solution

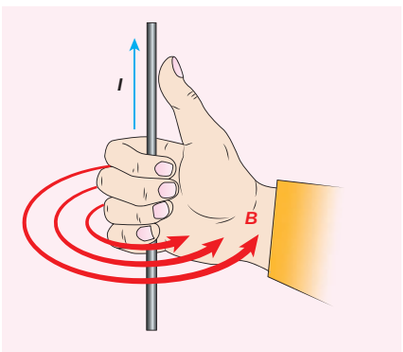

Using right hand rule, current flows upwards.

3.8 BIOT - SAVART LAW

Soon after the Oersted's discovery, both Jean-Baptiste Biot and Felix Savart in 1819 did quantitative experiments on the force experienced by a magnet kept near current carrying wire and arrived at a mathematical expression that gives the magnetic field at some point in space in terms of the current that produces the magnetic field. This is true for any shape of the conductor.

3.8.1 Definition and explanation of Biot- Savart law

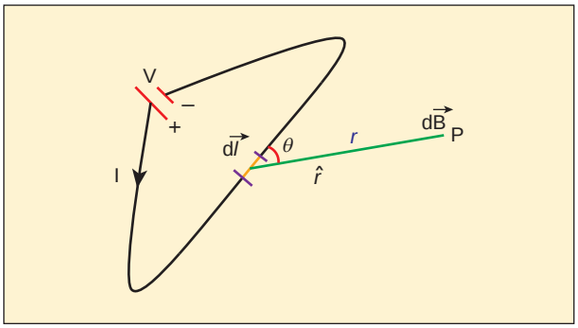


Figure 3.37 Magnetic field at a point P due to current carrying conductor

Biot and Savart experimentally observed that the magnitude of magnetic field $d\vec{B}$ at a point P (Figure 3.37) at a distance r from the small elemental length taken on a conductor carrying current varies

(i) directly as the strength of the current I
(ii) directly as the magnitude of the length element $d\vec{l}$
(iii) directly as the sine of the angle (say,θ) between $d\vec{l}$ and $\hat{r}$.
(iv) inversely as the square of the distance between the point P and length element $d\vec{l}$.

This is expressed as

$$dB \propto \frac{Idl}{r^2}\sin\theta$$

$$dB = k\frac{I\,dl}{r^2}\sin\theta$$

where $k = \frac{\mu_\circ}{4\pi}$ in SI units and k = 1 in CGS units. In vector notation,

$$d\vec{B} = \frac{\mu_\circ}{4\pi}\frac{I\,d\vec{l}\times\hat{r}}{r^2} \qquad (3.37)$$

Here vector $d\vec{B}$ is perpendicular to both I $d\vec{l}$ (pointing the direction of current flow)

UNIT-3(XII-Physics_Vol-1).indd 162 04-03-2019 10:34:13