


ANALOGUE BOARD REV A FOR PICO 2 / ESP32-P4 OR TEENSY 4.1, CORE SET WITH MIDI — COMPUTE MODULES AND PIN MAP

Both footprints sit on the one board, wired to the same nets; only one module is fitted.
Every signal into the module is 3.3 V.
The module's own 3.3 V output is not used: the board makes its own +3V3A and +3V3D.
Pico 2: 5 V reaches VSYS through D203 (Schottky, net MOD_5V), VBUS is left to USB.
ESP32-P4-WIFI6 (Pico pinout): firmware must set LDO channel 4 to 3.3 V first (pins 21, 22, 24 are on that bank); bridge JP201 for its supply margin. See docs/analogue_board_esp32p4.md.
Teensy 4.1 (not 5 V tolerant): cut the VIN-VUSB pads before fitting; VIN takes MOD_5V.
Every pin has its hole, so standard full-length headers fit; the ones this board does not use are left open.

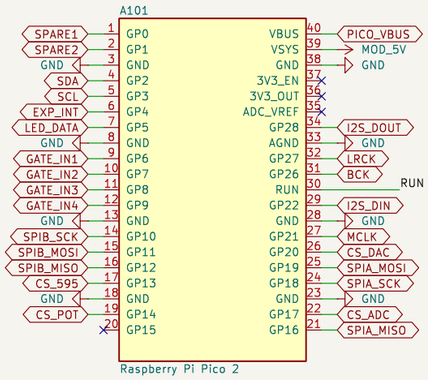

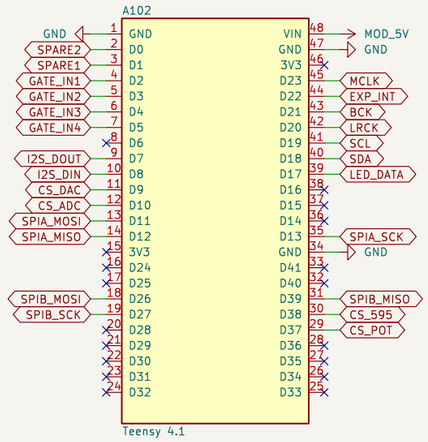



MIDI: bridge SPARE1–MIDI_TX and SPARE2–MIDI_RX (adjacent holes) with a wire or shunt. Left open, SPARE1/2 are plain GPIO.
On a Pico, move the SDK console off UART0 to USB.
RUN: wire a reset button to GND (Pico or ESP32-P4).

PIN MAP

Net	Function	Pico 2	Teensy 4.1	Why this pin
MCLK	I2S master clock to SCKI1/2	GP21 (pin 27)	D23	Pico CLK_GPOUT0 · Teensy MCLK1
BCK	I2S bit clock	GP26 (pin 31)	D21	Pico PIO side-set · Teensy BCLK1
LRCK	I2S word clock	GP27 (pin 32)	D20	Pico PIO side-set +1 · Teensy LRCLK1
I2S_DOUT	I2S data to codec DIN	GP28 (pin 34)	D7	Teensy OUT1A
I2S_DIN	I2S data from codec DOUT	GP22 (pin 29)	D8	Teensy IN1
SPIA_SCK	Converter bus clock	GP18 (pin 24)	D13	Pico SPI0 SCK · Teensy SCK
SPIA_MOSI	Converter bus data out	GP19 (pin 25)	D11	Pico SPI0 TX · Teensy MOSI
SPIA_MISO	Converter bus data in (ADS8688)	GP16 (pin 21)	D12	Pico SPI0 RX · Teensy MISO
CS_ADC	ADS8688 chip select	GP17 (pin 22)	D10	Pico SPI0 CSn · Teensy CS
CS_DAC	DAC8568 SYNC	GP20 (pin 26)	D9	
SPIB_SCK	Panel bus clock	GP10 (pin 14)	D27	Pico SPI1 SCK · Teensy SCK1
SPIB_MOSI	Panel bus data out	GP11 (pin 15)	D26	Pico SPI1 TX · Teensy MOSI1
SPIB_MISO	Panel bus data in (MCP3208)	GP12 (pin 16)	D39	Pico SPI1 RX · Teensy MISO1 (alt pin)
CS_595	74HCT595 latch (RCLK)	GP13 (pin 17)	D38	
CS_POT	MCP3208 chip select	GP14 (pin 19)	D37	
SDA	I2C data	GP2 (pin 4)	D18	Pico I2C1 SDA · Teensy SDA (Wire)
SCL	I2C clock	GP3 (pin 5)	D19	Pico I2C1 SCL · Teensy SCL (Wire)
EXP_INT	TCA9555 interrupt, active low	GP4 (pin 6)	D22	
GATE_IN1	Gate input 1	GP6 (pin 9)	D2	
GATE_IN2	Gate input 2	GP7 (pin 10)	D3	
GATE_IN3	Gate input 3	GP8 (pin 11)	D4	
GATE_IN4	Gate input 4	GP9 (pin 12)	D5	
LED_DATA	WS2812 data (buffered to 5 V)	GP5 (pin 7)	D17	Teensy TX4 (WS2812Serial)
SPARE1	Spare GPIO 1, or MIDI out (link hole)	GP0 (pin 1)	D1	Pico UART0 TX · Teensy TX1
SPARE2	Spare GPIO 2, or MIDI in (link hole)	GP1 (pin 2)	D0	Pico UART0 RX · Teensy RX1
MOD_5V	Module 5 V in	VSYS (pin 39)	VIN	Schottky D203; Q201 bypass if JP201
PICO_VBUS	Module USB 5 V sense	VBUS (pin 40)	—	Q201 gate: off with USB plugged in
RUN	Module reset	RUN (pin 30)	—	To hole J101–5

SHEETS

Power
Power entry, buck, linear rails, test points
File: power.kicad_sch

Codec & audio
PCM3060, two audio ins, two audio outs
File: codec_audio.kicad_sch

CV jacks & ADC
ADS8688, DG412 jack switches, CV holes
File: cv_io.kicad_sch

CV DAC
DAC8568 and the eight ±5 V output stages
File: cv_dac.kicad_sch

Pots & gate outs
MCP3208 pots, 74HCT595 gate outputs
File: pots_gates.kicad_sch

Expander, I2C & LEDs
TCA9555 buttons, EEPROM, Qwiic, WS2812
File: expander_i2c.kicad_sch

Gate ins
LM393 gate inputs
File: gate_in.kicad_sch

Edge strips
n8synth edge strips, fiducials
File: edge_strips.kicad_sch

TRS MIDI
MIDI in (H11L1) and out (5 V buffered), Type A
File: midi.kicad_sch

Generated by tools/analogue_board/build.py shared_core: edit the generator, not these files
Analogue board for Pico 2 / ESP32-P4 or Teensy 4.1, core set with MIDI. Spec: docs/analogue_board
Eight4aWish · CC BY-SA 4.0
Sheet: /
File: analogue_board_shared_core.kicad_sch


Title: Compute modules and pin map

Size: A3	Date: 2026-10-16	**Rev: A**
KiCad E.D.A. 9.0.7		Id: 1/10

POWER

±12 V enter through a 2×5 shrouded header (the bus +5 V is not used). Each rail: series Schottky, ferrite, 10 µF + 100 nF. +5VD comes from a forced-PWM buck (no light-load pulse skipping in the audio band); +5VA from a linear regulator on its own; each 3.3 V rail from its own LDO. A 0 Ω link after every regulator lets a faulty rail be isolated and its current measured.


Eurorack power entry (pin 1 = −12 V, red stripe)

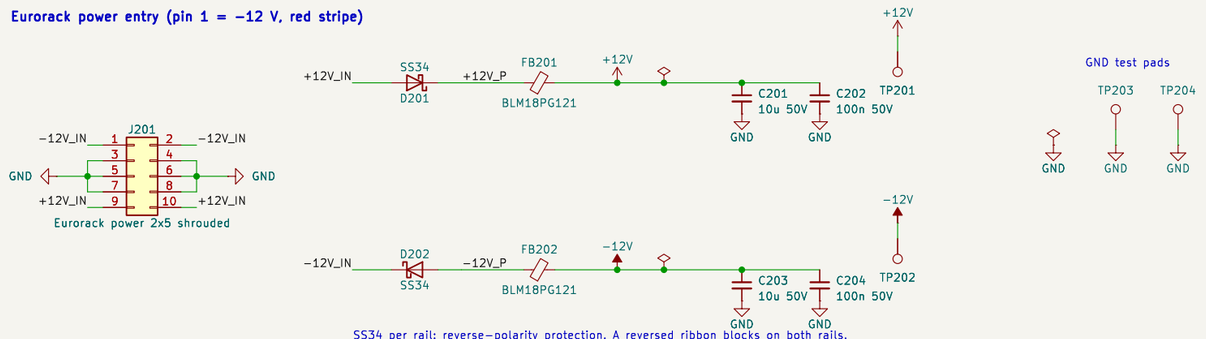


SS34 per rail: reverse-polarity protection. A reversed ribbon blocks on both rails. 3 A parts: +12 V can reach ≈0.75 A with an ESP32-P4 and a lit LED chain.

+5VD: TPS54308 forced-PWM buck, 350 kHz (TPS54202 is a pin- and value-compatible fallback)


Vout = 0.596 V × (1 + 15k/2k) = 5.07 V; L and Cout from TI's table for 5 V. Input: own ferrite and 2 × 10 µF, keeping the 350 kHz input ripple off the ±12 V rail the op-amps share. EN divider 510k/75k: starts at ≈9.2 V, stops at ≈8.1 V, so the digital 5 V never runs while the analogue 5 V (L78M05) is down: TI's power-up order for the codec.

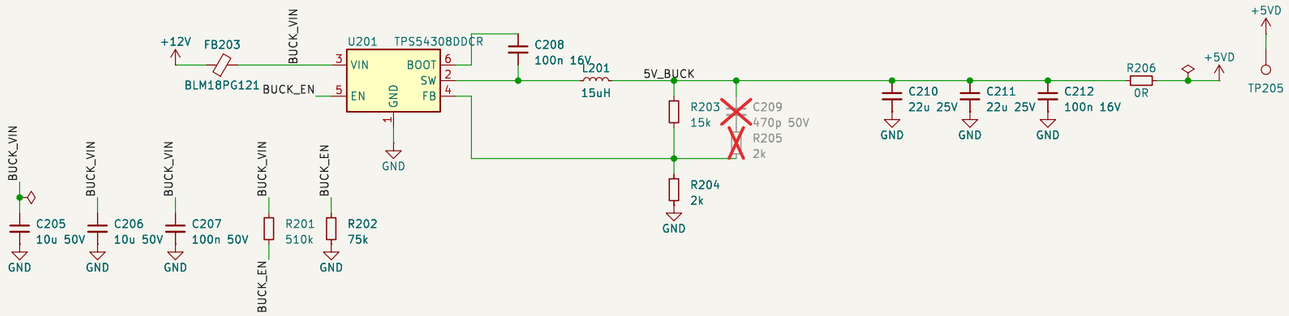


+5VA: L78M05 from +12 V, its own regulator (PCM3060 VCC, ADS8688 AVDD, +3V3A LDO)

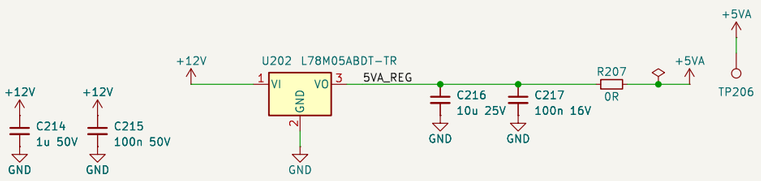

+3V3A: XC6206 from +5VA (DAC8568, MCP3208, pot reference via POT_REF)

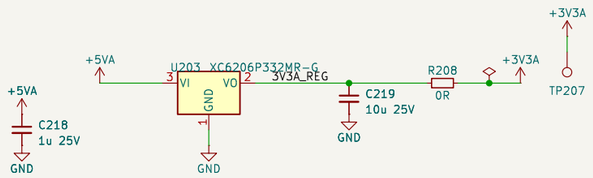


+3V3D: XC6206 from +5VD (codec VDD, ADS8688 DVDD, logic, Qwiic, MIDI)

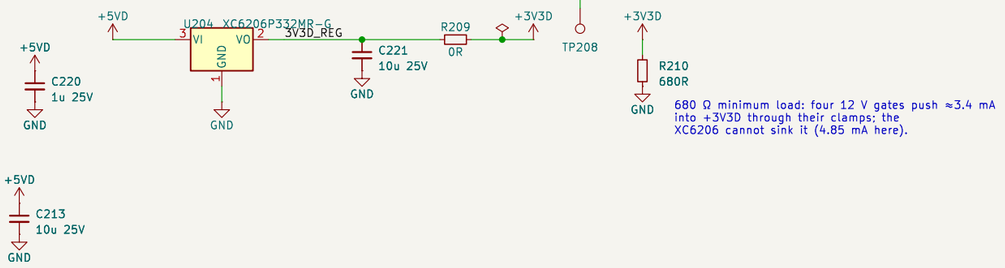

MOD_5V: +5VD through a Schottky to Pico VSYS / ESP32-P4 VCC_5V / Teensy VIN

Q201 bypasses D203 when JP201 is bridged, for the ESP32-P4, whose regulator needs ≥ 4.5 V at 0.5–0.7 A. Its gate follows the Pico/P4 VBUS pin (pin 40): with USB plugged in the FET turns off, as in the Pico 2 datasheet's VSYS circuit. Leave JP201 open for a Pico 2 or a Teensy.

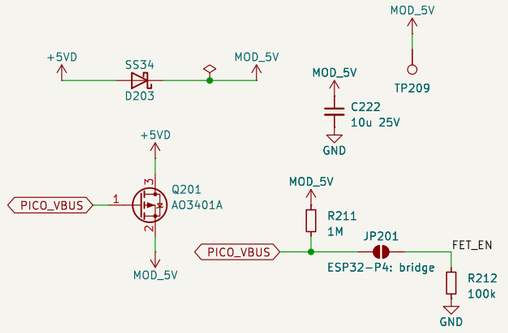

Load estimate: +12 V ≈ 120 mA typical; with an ESP32-P4 (0.45–0.7 A at 5 V) plus a lit LED chain, ≈0.75 A. −12 V ≈ 25 mA. XC6206: 200 mA each; +3V3D ≈ 50 mA.

Generated by tools/analogue_board/build.py shared_core: edit the generator, not these files.
Analogue board for Pico 2 / ESP32-P4 or Teensy 4.1, core set with MIDI. Spec: docs/analogue_board_spec.md

Eight4aWish · CC BY-SA 4.0


Sheet: /Power/
File: power.kicad_sch

Title: Power


Size: A3	Date: 2026-10-16	**Rev: A**
KiCad E.D.A. 9.0.7		Id: 2/10


CODEC AND AUDIO

PCM3060 in hardware-control mode, the same straps as Mutable Beads: MODE 220 kΩ to DGND = parallel control with differential outputs; FMT low = 24-bit I2S, IFMD low = ADC and DAC both slaves, DEMP low = no de-emphasis. One I2S bus feeds both halves. RST is pulled up, so the codec starts by itself; CODEC_RST also reaches a hole (J303) so firmware can hold it in reset, as Beads does. Full scale is 20 Vpp in and out; firmware runs about 6 dB below. VCC via a ferrite from +5VA, VDD via 5.1 Ω from +3V3D: each with its own 10 µF + 100 nF.

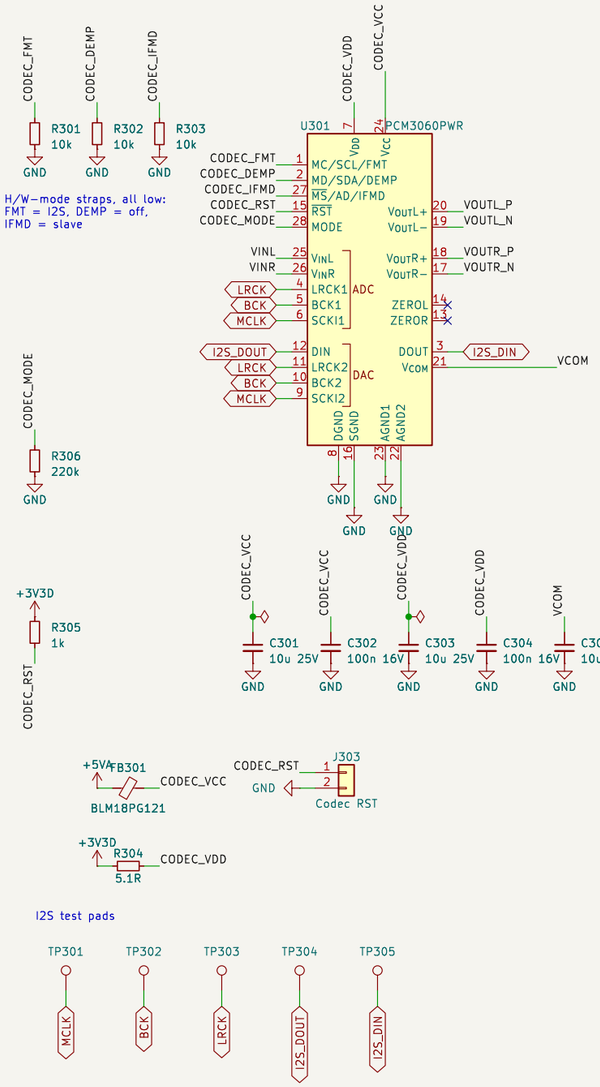



AUDIO INPUTS: 22 Vpp → 3 Vpp (codec full scale). AC-coupled, inverting (firmware flips the sign). ±12 V stays inside the codec rails, so the BAT54S clamps only act on faults. 100 nF on each + input decouples VCOM (12.5 kΩ source) at the op-amp, as the Patch SM does.

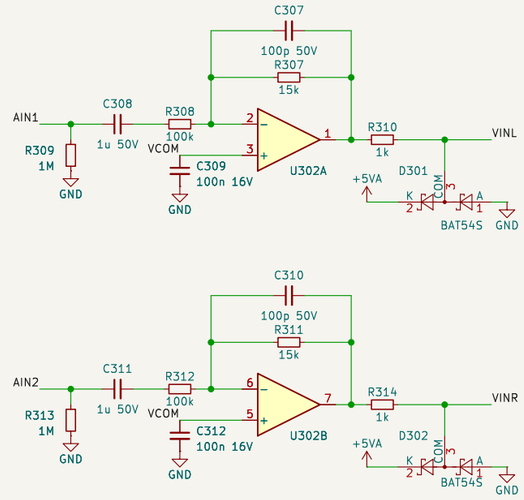



AUDIO OUTPUTS: balanced second-order MFB low-pass (Beads' topology), gain 30k/12k = 2.5, so 8 Vpp → 20 Vpp, DC-coupled, non-inverting (VOUT+ to the + side). 1 nF C0G across the two nodes and 100 pF from each op-amp input: f0 ≈ 65 kHz, Q ≈ 0.73, flat to 20 kHz (Basic parts except the 1 nF C0G). 1 kΩ 1206 out survives output-to-output patching.

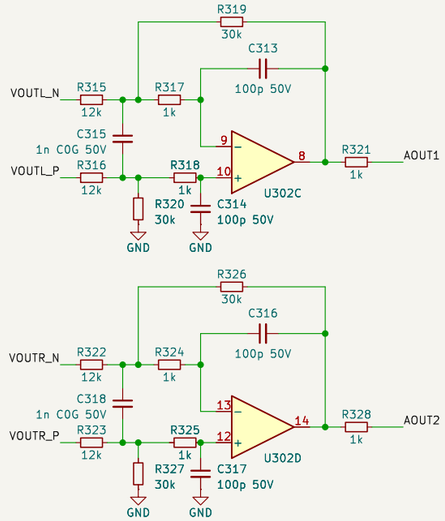



Generated by tools/analogue_board/build.py shared_core: edit the generator, not these files
Analogue board for Pico 2 / ESP32-P4 or Teensy 4.1, core set with MIDI. Spec: docs/analogue_board

Eight4aWish · CC BY-SA 4.0


Sheet: /Codec & audio/
File: codec_audio.kicad_sch


Title: Codec & audio


Size: A3	Date: 2026-10-16	**Rev: A**
KiCad E.D.A. 9.0.7		Id: 3/10


CV JACKS AND ADC

ADS8688: 8 channels, 16-bit, 1 MΩ inputs with ±10.24 / ±5.12 V ranges per channel (firmware default ±10.24 V), OVP ±20 V.
Each CV jack: 15 V TVS at the hole, read through 1 kΩ with 1 nF at the ADC pin (TI's EVM). 100 kΩ to ground, but the ADC's 1 MΩ returns to an internal bias, so an UNPATCHED input reads ≈ +0.2 V (no jack detect since 2026-10-16).
CV1-6 are bidirectional: a DG412 switch (on at logic 1) joins the DAC stage through 1 kΩ (1206); with it on the ADC reads the jack itself. 4.7 kΩ pull-downs beat the TCA9555's internal pull-ups: every jack starts as an input.

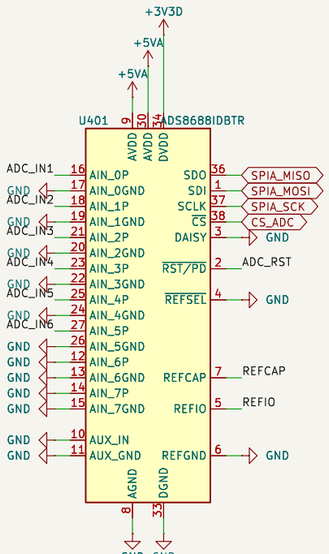

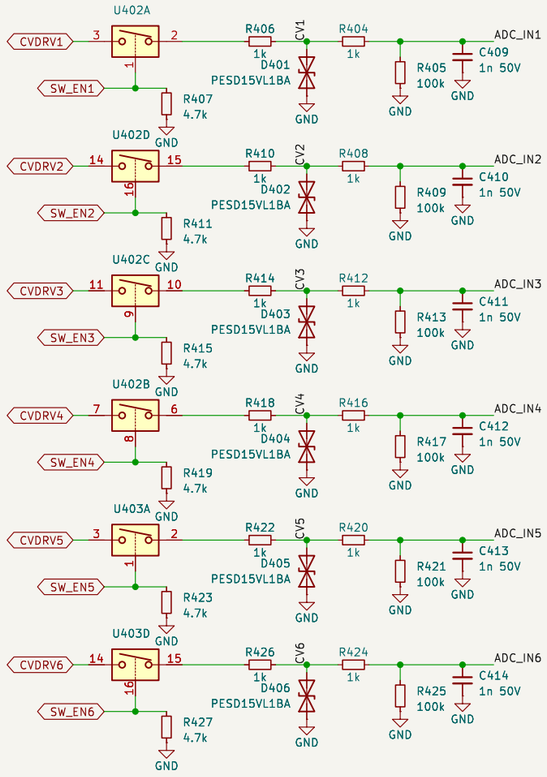

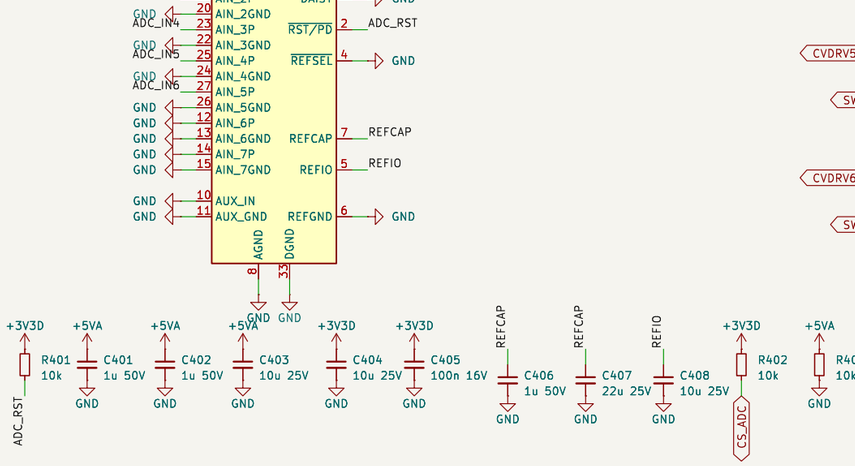


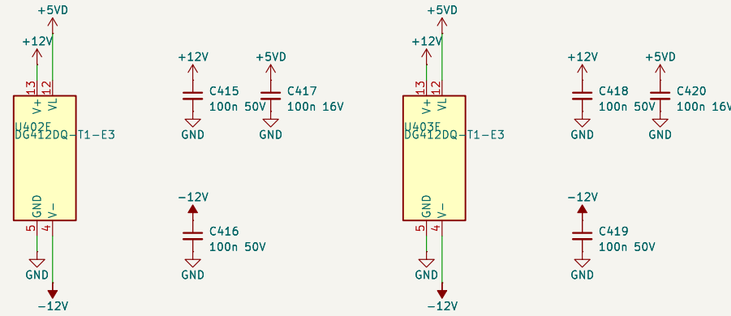


Spare switches (U403 SW3, SW4): off, both sides grounded



Converter bus test pads

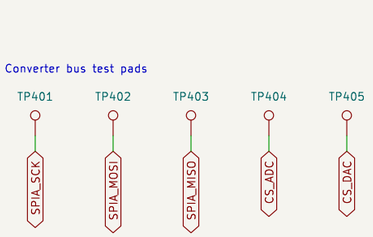



ADC channels 7 and 8 are unused on this board: inputs grounded.

DAISY, REFSEL, AUX low: stand-alone, internal reference, AUX channel unused.
REFCAP 1 µF + 22 µF and REFIO 10 µF as TI's layout example.


Generated by tools/analogue_board/build.py shared_core: edit the generator, not these files.
Analogue board for Pico 2 / ESP32-P4 or Teensy 4.1, core set with MIDI. Spec: docs/analogue_board.md

Eight4aWish · CC BY-SA 4.0


Sheet: /CV jacks & ADC/		
File: cv_io.kicad_sch		
Title: CV jacks & ADC		
Size: A3	Date: 2026-10-16	**Rev: A**
KiCad E.D.A. 9.0.7		Id: 4/10

CV DAC

DAC8568 grade A: 0–2.5 V from its internal reference (off at power-up), outputs reset to zero. Each stage: non-inverting gain 1 + 33k/10k = 4.3, offset by OFFSET_REF = VREF × 22k/34k through the 10 kΩ: Vout = 4.3·Vdac − 5.34 V, so −5.34 V … +5.41 V, putting ±5 V inside the DAC's specified codes (0 V at code ≈ 32544). The offset tracks the DAC's own reference, as in Performer, O&C, Marbles and Stages. CVO7/8: the 1 kΩ sits inside the loop (feedback from the jack side, as Mutable does), so the jack holds its voltage under load. CV1–6 go through the DG412 switch; firmware corrects their load sag using the ADC, which reads the jack. ±10 V variant (not Rev A): Rf 75k, divider 15k/20k, all Basic: gain 8.5, OFFSET_REF 1.429 V, −10.71 … +10.54 V; needs ≥ 10 kΩ loads. The TL074H can swing it.

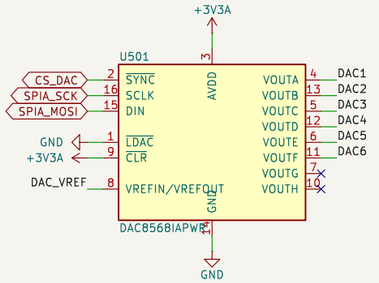


LDAC low: each write updates its output.
CLR high: clear pin unused.

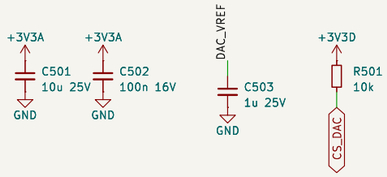



OFFSET_REF = VREF × 22k/(12k + 22k) = 1.618 V, buffered


1 nF (not 1 µF): the offset must track VREF quickly, or enabling the reference glitches every output.

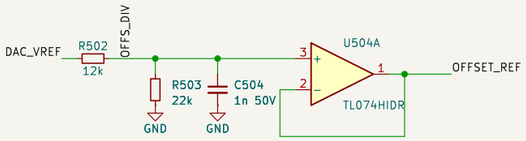


Spare U504 sections: followers with + to GND



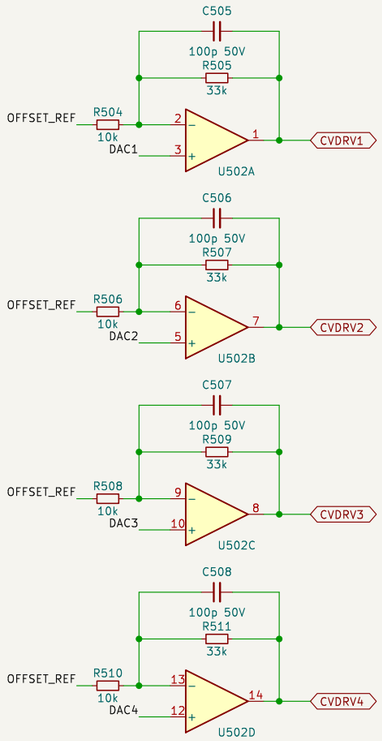

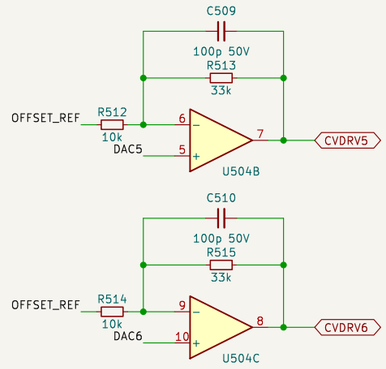

CVDRV1–6 go to the DG412 switches (sheet CV jacks & ADC). CV5–6 run on U504 B and C.

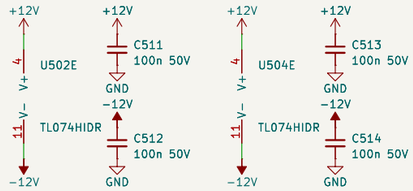

Generated by tools/analogue_board/build.py shared_core: edit the generator, not these files.
Analogue board for Pico 2 / ESP32-P4 or Teensy 4.1, core set with MIDI. Spec: docs/analogue_board.
Eight4aWish · CC BY-SA 4.0


Sheet: /CV DAC/
File: cv_dac.kicad_sch


Title: CV DAC


Size: A3	Date: 2026-10-16	**Rev: A**
KiCad E.D.A. 9.0.7		Id: 5/10


POTS AND GATE OUTPUTS


Pots: MCP3208 on +3V3A. Its VREF and the pot tops share POT_REF (100 Ω + 10 µF from +3V3A), so readings are ratiometric and the hand-wired pot leads can't disturb the DAC's supply. Each wiper: 1 kΩ + 100 nF, 1 MΩ to ground so an unwired channel reads 0 (100 kΩ would bend a 100 kΩ pot's response by up to 12 %).
Gate outs: four, one per wiring bank (2026-10-16), from QA–QD of a 74HCT595 at 5 V (VIH 2.0 V, so 3.3 V logic drives it) → 1 kΩ → jack, BAV99 clamps to +5VD and GND. QE–QH are unused; QH' still chains a second 595 from J603.
OE is held high (outputs off) by a pull-up until firmware drives GATE_OE_N low: the 595's register powers up random.

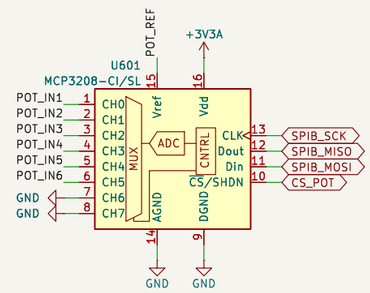


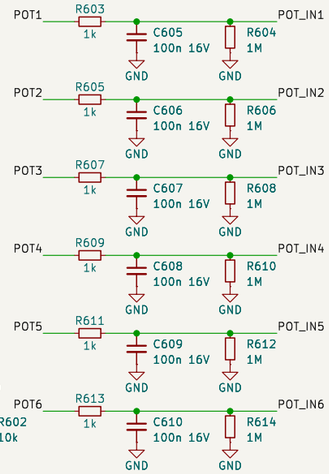

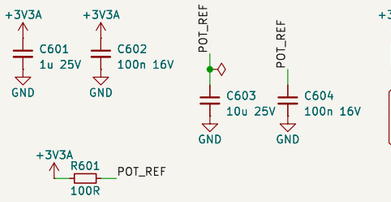

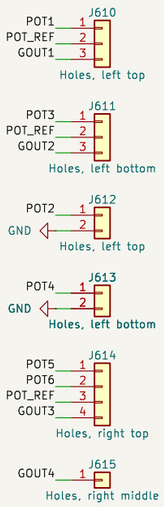


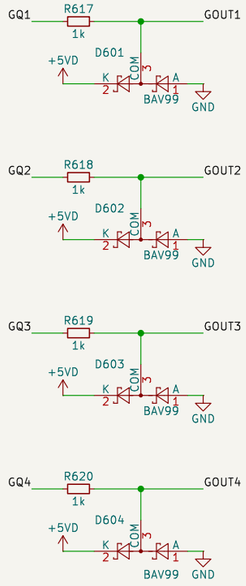


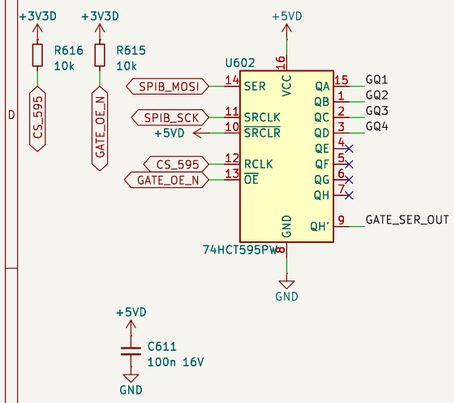

SRCLR tied high. Boot order: OE off, clear the register, then enable (firmware).

Panel bus test pads

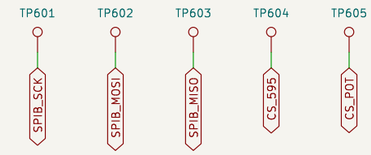



Gate expansion: QH', SRCLK, RCLK, OE

Chain a second 74HCT595 off-board from J603 (74HCT595 only: a 74HC595 at 5 V needs 3.15 V inputs). OE keeps it off at boot too.

Generated by tools/analogue_board/build.py shared_core: edit the generator, not these files.
Analogue board for Pico 2 / ESP32-P4 or Teensy 4.1, core set with MIDI. Spec: docs/analogue_board_spec.md

Eight4aWish · CC BY-SA 4.0


Sheet: /Pots & gate outs/
File: pots_gates.kicad_sch


Title: Pots & gate outs


Size: A3	Date: 2026-10-16	**Rev: A**
KiCad E.D.A. 9.0.7		Id: 6/10

EXPANDER, I2C AND LEDS

TCA9555 at 0x20, M24C64 at 0x50; a Qwiic display is typically 0x3C/0x3D. 2.2 kΩ I2C pull-ups for 400 kHz.
The TCA9555 powers up with every line an input pulled high internally (~100 kΩ): switch enables and the gate
OE are defined by the pulls on their own sheets. Buttons and switches use P07 and P10–P17: hole → 1 kΩ → node with
10 kΩ to +3V3D and 100 nF (10 nF on SW5–SW8) → expander pin, as EuroPi does. A button pulls its hole to GND.
ENCODERS: wire A and B to gate inputs 3 and 4 (a clean comparator into a direct GPIO; encoder common to a +3V3D hole),
not to the expander: a busy OLED holds the shared I2C bus for ~23 ms and steps get lost. The push switch can use any SW hole.

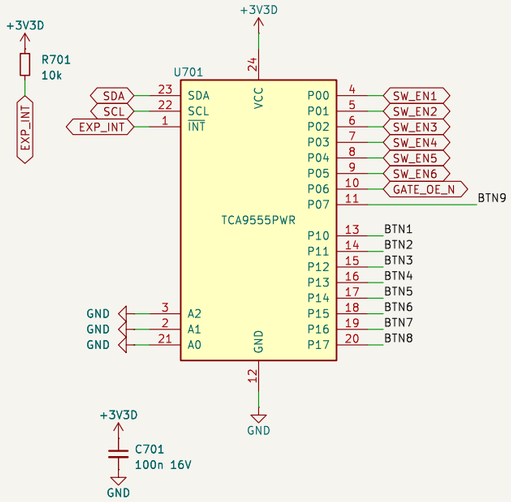


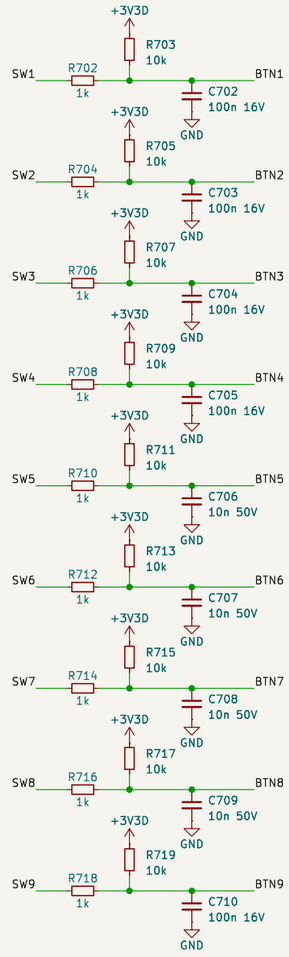


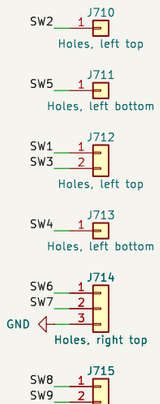



Encoder A/B: use gate inputs
3–4 (see note above); push
switch on any SW hole.

E0–E2 low: 0x50. WC low: writable.










WS2812 data: 3.3 V → 74AHCT1G125 at 5 V → 330 Ω → LED_DIN. LED power from the +5VD holes.

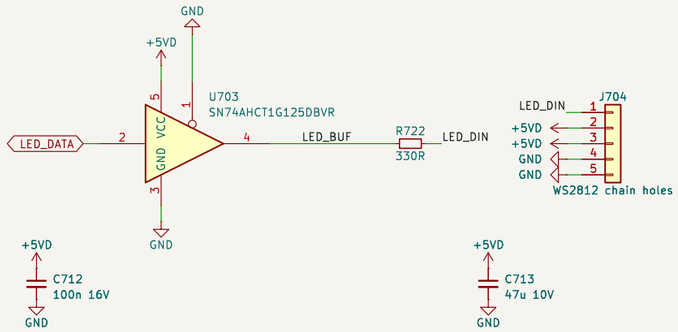

Generated by tools/analogue_board/build.py shared_core: edit the generator, not these files
Analogue board for Pico 2 / ESP32-P4 or Teensy 4.1, core set with MIDI. Spec: docs/analogue_board

Eight4aWish · CC BY-SA 4.0


Sheet: /Expander, I2C & LEDs/
File: expander_i2c.kicad_sch


Title: Expander, I2C & LEDs


Size: A3	Date: 2026-10-16	**Rev: A**
KiCad E.D.A. 9.0.7		Id: 7/10


GATE INPUTS


Adapted from Ogham's clock input (Ogham feeds the comparator's − input; this one is non-inverting, so four channels share one threshold divider): 10 kΩ, BAT54S clamps to +3V3D / GND, 100 kΩ to ground, LM393 against GATE_TH = 1.65 V with 100 kΩ hysteresis. Trips at ≈1.98 V rising, ≈1.67 V falling at the jack. The LM393 runs from +12 V so the clamped input (up to ≈3.6 V) stays inside its common-mode range (VCC − 1.5 V; at 5 V that would be 3.5 V). Open-collector output pulled up to +3V3D: GATE_INn is high while the gate is high, safe for any module. Firmware: catch 100 µs triggers with edge interrupts or PIO. The clamps push up to ≈3.4 mA into +3V3D: the 680 Ω minimum load on the power sheet absorbs it.

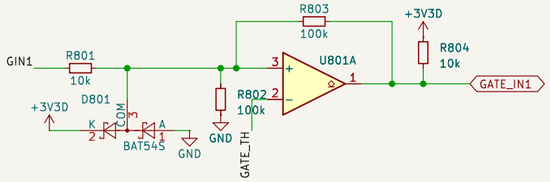

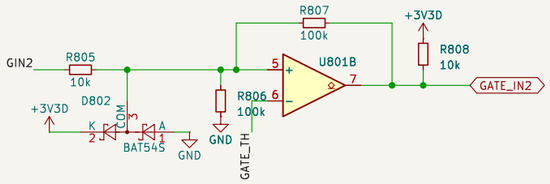


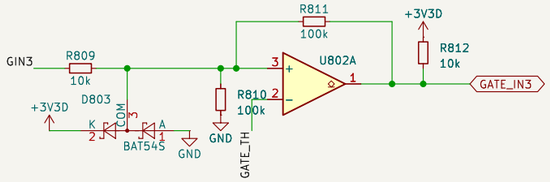


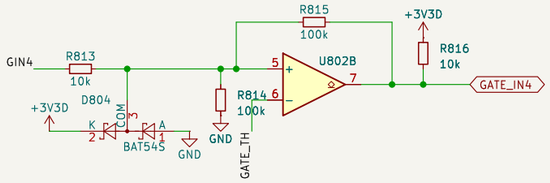



GATE_TH = +3V3D / 2





Generated by tools/analogue_board/build.py shared_core: edit the generator, not these files.
Analogue board for Pico 2 / ESP32-P4 or Teensy 4.1, core set with MIDI. Spec: docs/analogue_board.md

Eight4aWish · CC BY-SA 4.0

Sheet: /Gate ins/
File: gate_in.kicad_sch

Title: Gate ins

Size: A3	Date: 2026-10-16	**Rev: A**
KiCad E.D.A. 9.0.7		Id: 8/10

EDGE STRIPS

Two n8synth-style edge strips, 40 positions each at 2.54 mm. Each position is an outer hole (the deck's header pin, Dn) joined to an inner hole (a wiring point, Wn) by the net DECK_Ln / DECK_Rn: one pin per hole. Nothing else on the board connects to them: each module is wired by hand from the channel holes to the inner holes. Deck cells occupy positions 1–10, 16–25 and 31–40. The right strip serves only the 10HP deck: it has no holes at 11–15 and 26–30, and only the deck hole at 10, 16 and 31.
10HP: the board sits parallel behind the deck and both strips are used. 6HP: the board sits at 90° and only the left strip meets the deck's right-angle header.


Fiducials for JLCPCB assembly


FID901 Fiducial

FID902 Fiducial

FID903 Fiducial

Hardware licence: CC BY-SA 4.0 (LICENSE in hardware/analogue_board).

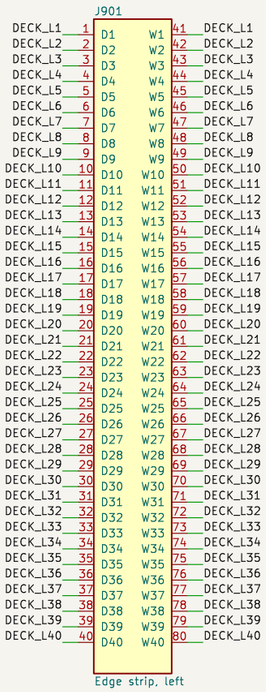

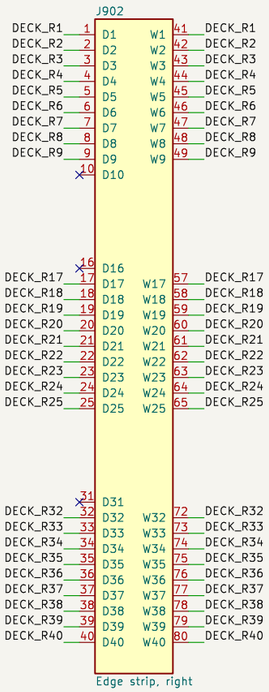

Generated by tools/analogue_board/build.py shared_core: edit the generator, not these files
Analogue board for Pico 2 / ESP32-P4 or Teensy 4.1, core set with MIDI. Spec: docs/analogue_board

Eight4aWish · CC BY-SA 4.0

Sheet: /Edge strips/
File: edge_strips.kicad_sch


Title: Edge strips


Size: A3	Date: 2026-10-16	**Rev: A**
KiCad E.D.A. 9.0.7		Id: 9/10

TRS MIDI IN AND OUT

MIDI 1.0 over 3.5 mm TRS, Type A (MIDI Association RP-054): tip = current sink (DIN pin 5), ring = current source
(DIN pin 4), sleeve = shield (DIN pin 2). Electrical values per CA-033 (2014). Uses the two UART-capable spare pins through
link holes on J101 (SPARE1-MIDI_TX, SPARE2-MIDI_RX): left open, SPARE1/2 stay plain GPIO. Review: docs/analogue_board_review/midi.md


MIDI OUT: 3.3 V UART → 74AHCT1G125 at +5VD → 2 × 100 Ω per leg (1206) → TRS. Idle high = no loop current.
A mono cable shorting ring to sleeve draws 25 mA from the buck; each 100 Ω sees 64 mW.

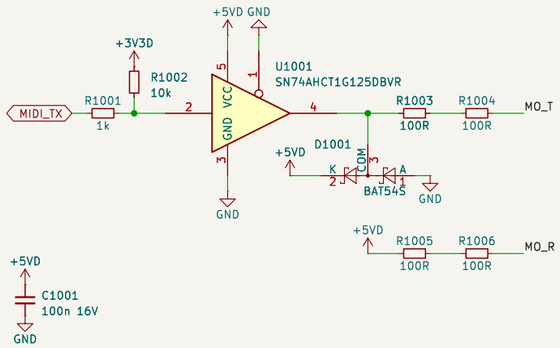



WIRING (two stereo jacks in deck cells):
OUT: tip → MO_T, ring → MO_R, sleeve → the deck's D (ground) pad.
IN: tip → MI_T, ring → MI_R, sleeve → MI_S or open: NOT to D.
Turn MIDI on: link SPARE1-MIDI_TX and SPARE2-MIDI_RX on J101.
Type B gear: swap that jack's tip and ring wires.
Bring-up: loop OUT to IN with a stereo cable: ≈1.2-1.3 V
across the 220 Ω while sending = 5.5-5.9 mA in the loop.
The H11L1 is ≈4 mm tall: place it outside the module footprint.

MIDI IN: ring → 220 Ω → H11L1 LED → tip; 1N4148WS across the LED for reverse polarity. H11L1 switches at 1.6 mA
(a worst-case 3.3 V sender still gives ≈4.5 mA). Output pulled up by 1 kΩ to +3V3D, then 1 kΩ to the link hole.
The IN jack's sleeve is NOT grounded (CA-033: no ground loop): wire it to MI_S (100 nF to ground) or leave it open.

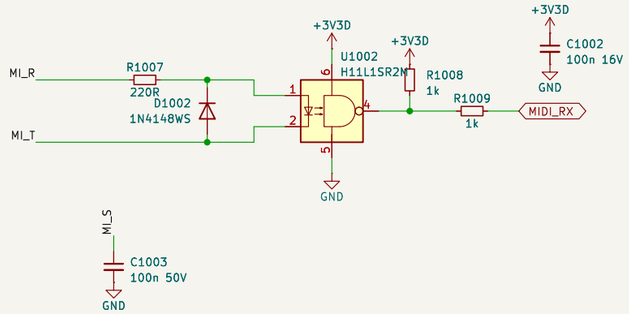

Generated by tools/analogue_board/build.py shared_core: edit the generator, not these files
Analogue board for Pico 2 / ESP32-P4 or Teensy 4.1, core set with MIDI. Spec: docs/analogue_board
Eight4aWish · CC BY-SA 4.0

Sheet: /TRS MIDI/		
File: midi.kicad_sch		
Title: TRS MIDI		
Size: A3	Date: 2026-10-16	**Rev: A**
KiCad E.D.A. 9.0.7		Id: 10/10