

Design Report

GaN phase-leg building block for stacked polyphase bridge traction drives
75 V, 100 A_{rms}, $2 \times$ EPC2361 per switch

PCB-Design project, KTH

7 October 2026 — design study, simulation-based (no hardware yet)

Abstract

This report documents the step-by-step design of a phase-leg building block for a stacked polyphase bridge (SPB) traction drive. Each step states its objective, the options considered, the decision, and the evidence from analysis, Ansys Q3D extraction and LTspice simulation. The design aims at high efficiency (low switching and conduction loss), high power density, and a high switching frequency (smaller DC link and lower current ripple delivered to the machine), while keeping the parasitics small and symmetric so that two paralleled GaN devices share current. Result: 2.65 kW per leg on a 30×28 mm four-layer board (0.31 kW/cm^2), 0.37 nH commutation-loop inductance per cell (Q3D, copper + MLCC ESL), $<0.1\%$ left/right asymmetry, $R_{g,on}/R_{g,off} = 2/0 \Omega$, and 99.58 % estimated efficiency at 50 kHz (99.50 % at 100 kHz).

Key result	Value
Power per leg ($M = 1$, $\cos \varphi = 1$) / maximum ($M = 1.15$)	2.65 / 3.05 kW
Board area, power density (board level, without cooling)	8.5 cm^2 , 0.31 kW/cm^2
Loss at 50 kHz / efficiency (typ. $R_{DS(on)}$, 100°C)	11.12 W / 99.58 %
Efficiency at 100 kHz	99.50 %
Commutation-loop inductance per cell (Q3D, incl. MLCC ESL)	0.374 nH
Peak V_{DS} at 160 A (13 % overload)	83.1 V (QH), 85.1 V (QL)
Gate loop per FET; current imbalance between paralleled FETs	1.70 nH; $<0.1\%$
DC-link (effective) per leg	$77 \mu\text{F}$ ($24 \times 10 \mu\text{F} + 12 \times 1 \mu\text{F}$)

1 Design objectives and flow

Objective	Metric	Target
Efficiency	loss per leg at the rated point	$\geq 99.5\%$ ($\leq 13.3 \text{ W}$)
High switching frequency	f_{sw} at which the target is still met	50 kHz nominal, 100 kHz capable
Winding current ripple	$\Delta i_{pp} \approx V_{dc}/(4Lf_{sw})$	requirement handed to the machine design
Device safety	peak V_{DS} , V_{GS}	$\leq 90 \text{ V}$; $-4 \dots +6 \text{ V}$
Paralleling	dynamic and static current imbalance	as small as the layout allows
Power density	board area per kW	as small as cooling and probing allow

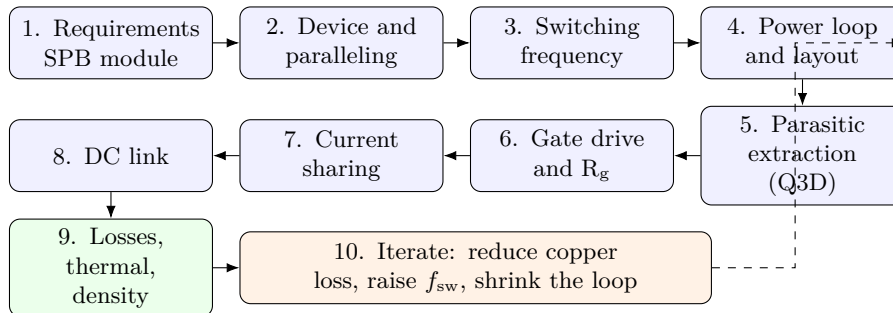


Figure 1: Design flow. Steps 4–7 are coupled through the parasitics: the layout sets the loop and gate inductances, which set the gate resistors, which set the switching loss and the overshoot.

2 Step 1 — Requirements from the SPB system

In an SPB the DC bus is split into N series-stacked modules, each driving its own phase group of a multiphase machine and seeing only V_{dc}/N . With 100 V GaN devices the module bus is set to 75 V ($N \approx 11$ for 800 V), leaving a 15 V design margin for overshoot (90 V) and 25 V to the rating. Phase current 100 A_{rms} (141 A peak); rated power per leg 2.65 kW; efficiency target 99.5 %. The SPB motivates the design objectives: (i) a cheap, fast, low-voltage device class becomes usable for 800 V traction; (ii) the voltage step per module is only 75 V, so dv/dt stress on the winding is much smaller than with a full-bus SiC inverter; (iii) one building block is repeated N times, so its density and efficiency multiply.

3 Step 2 — Device and number in parallel

Device. EPC2361: 100 V, 0.75/1.0 mΩ, $Q_G = 28$ nC, $Q_{rr} = 0$, 3×5 mm, top-side cooling ($R_{thJC} = 0.2$ K/W). Its figure of merit allows fast, low-loss switching at 75 V; the absence of reverse recovery removes the dominant turn-on loss of silicon.

How many in parallel. Conduction loss falls as $1/n$; the current-independent part of the switching energy (output charge) rises with n ; area, loop length and sharing risk grow with n .

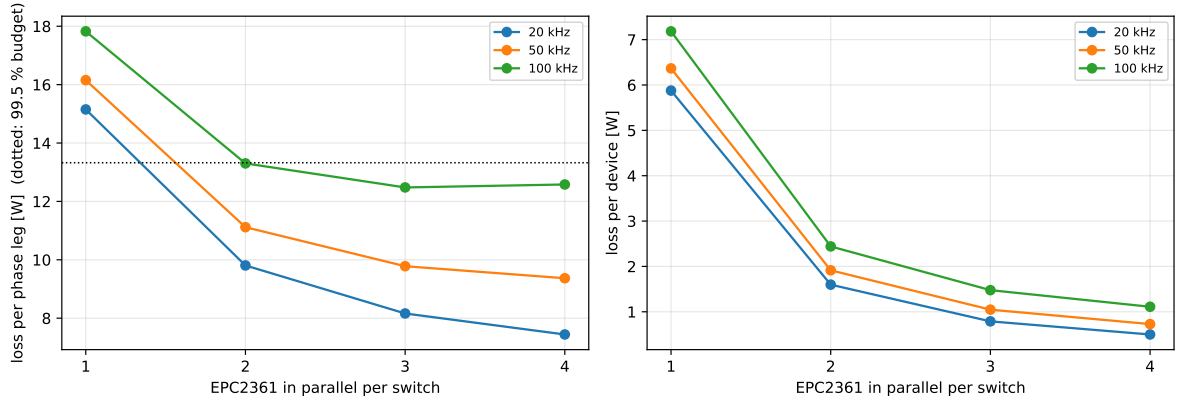


Figure 2: Loss per leg and per device versus the number of EPC2361 per switch (switching energy scaled from the $n = 2$ LTspice fit; copper loss kept constant).

At 50 kHz	$n = 1$	$n = 2$	$n = 3$	$n = 4$
Conduction [W]	11.1	5.5	3.7	2.8
Switching [W]	1.4	1.9	2.4	2.9
Total incl. copper [W] / efficiency [%]	16.2 / 99.39	11.1 / 99.58	9.8 / 99.63	9.4 / 99.65
Loss per device [W]	6.4	1.9	1.0	0.7

Decision: $n = 2$. One device misses the target and dissipates 6.4 W per device. Two meet it with margin. Three or four gain only 1.3–1.7 W while increasing area, loop length and sharing risk. *Note: the scaling assumes the same layout quality for every n ; in reality $n \geq 3$ lengthens the loop.*

4 Step 3 — Switching frequency

A higher f_{sw} shrinks the DC-link capacitance (Step 8) and the current ripple delivered to the machine ($\propto 1/f_{sw}$), but raises the inverter switching loss linearly, by about 0.44 W per 10 kHz for this block (Step 9).

Winding ripple requirement. The machine is not yet defined, so machine-side PWM losses are not evaluated here. The inverter side can, however, state what it requires: the peak-to-peak ripple of a phase is at most $\Delta i_{pp} \approx V_{dc}/(4Lf_{sw})$, where L is the inductance seen by the ripple. For $\Delta i_{pp} \leq 10\%$ of the 141 A peak this means $L \geq 53, 27$ and 13 μH at 25, 50 and 100 kHz, a requirement to be handed to the machine design.

Decision: 50 kHz nominal, 100 kHz capable. 50 kHz halves the DC-link capacitance and the ripple compared with 25 kHz and still leaves margin to the efficiency target; the block reaches 99.50 % at 100 kHz. The final value

is fixed once the machine is selected.

5 Step 4 — Power loop and layout: minimising the parasitics

Constraint. $\Delta V = L_{\text{loop}} di_{\text{cell}}/dt \leq 15 \text{ V}$. With about 40 A/ns through one cell (FET pair) this gives $L_{\text{loop}} \lesssim 0.37 \text{ nH}$.

Measures, each quantified with Q3D:

1. *Vertical (inner-layer) loop.* Forward current on L1, return on L2 directly underneath: flux cancellation. Loop inductance scales with the L1–L2 dielectric: 0.075/0.1/0.2 mm gives 0.30/0.34/0.50 nH (copper). Chosen 0.1 mm (two-ply prepreg, 0.9 kV/mm at 90 V).
2. *Commutation capacitors at the high-side drain.* $6 \times 1 \mu\text{F}$ 0805 per cell in parallel; their ESL adds only about 0.08 nH. Placement variants (single cell, with ESL): bank at QH 0.39 nH, bank between QH and QL 0.38 nH (but switch-node plane on L2), two banks with a close L2/L3 pair 0.33 nH.
3. *Two mirrored cells.* Each FET pair has its own commutation loop and carries half of the load current, so its di/dt is halved; the loop inductance itself is not reduced. Mirror symmetry makes left and right identical ($<0.1\%$).
4. *Dense via rows, no plane cuts under the cells, short wide copper; DC+ and AC brought in on inner planes so that L1 stays compact.*

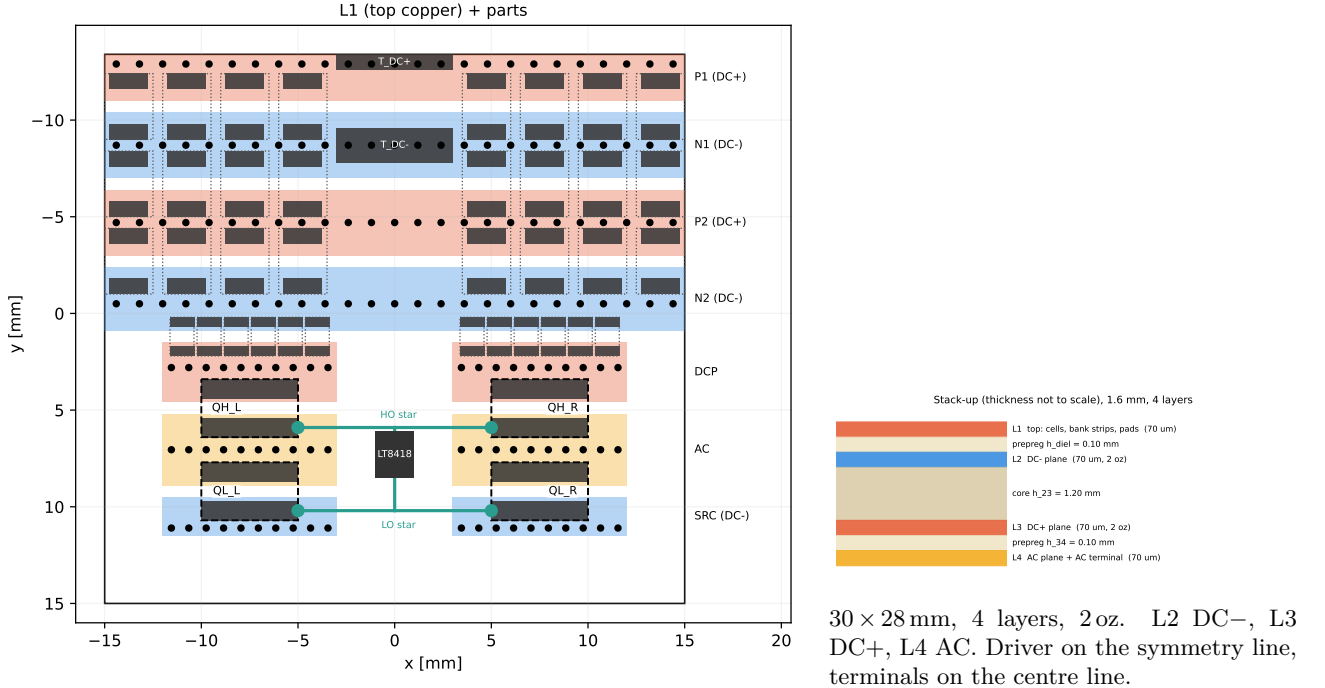


Figure 3: Building-block layout (generated from the same geometry as the Q3D model).

6 Step 5 — Parasitic extraction

Q3D models only the copper; every component is a gap with source and sink terminals on its pads. The resulting partial R/L matrix (21 terminals) is exported to LTspice with coupling coefficients, so the circuit simulation sees the real layout.

Commutation loop per cell (copper / with MLCC ESL)	0.312 / 0.374 nH
Gate loop per FET (one / both driven)	1.70 / 2.21 nH
DC resistance terminal-to-FETs, DC+ / DC- / AC (2 oz)	0.216 / 0.226 / 0.146 mΩ

Loop inductance and paralleling. Each FET sees its own cell loop of 0.374 nH; paralleling does not reduce it. Q3D excites both cells simultaneously (1 A each), so this value already contains the mutual coupling through

the shared bank and planes. Paralleling reduces the current each loop commutates: each cell carries half the load current, so its di/dt and therefore its overshoot are lower. The value excludes the EPC2361 package inductance and post-routing details, so the real loop will be somewhat higher; the DPT ringing frequency will give the measured value.

The extraction also revealed a non-obvious loss: the DC planes carry about $65 A_{\text{rms}}$ of switching-averaged current over 15–20 mm, so the PCB copper costs 4.67 W with 1 oz inner layers and 3.30 W with 2 oz (adopted).

7 Step 6 — Gate drive and gate resistors

Driver requirements (from the design): rating ≥ 95 V (prefer ≥ 110 V); bootstrap clamp (the switch node goes 2–3 V negative in dead time, which would overcharge the bootstrap above the 6 V GaN limit); source ≥ 2 –4 A, sink ≥ 4 A with split outputs; dv/dt immunity ≥ 100 V/ns; delay matching of a few ns.

Driver	Rating	Source / sink	Notes	Verdict
TI LMG1210	200 V	1.5 / 3 A	too weak at 120 A; gate bump 0.95 V at 1Ω	rejected
uPI uP1966E (EPC90156)	85 V	0.7 / 0.4Ω	only about 5 V margin at 75 V	rejected
ADI LT8418	100 V	4 / 8 A ($0.6/0.2 \Omega$)	smart bootstrap, WLCSP	baseline
Infineon	120 V	4 / 4 A ($0.7/0.47 \Omega$)	GaN bootstrap clamp, Miller	strong
2EDL5014AA-U2D			clamp, 2×2 mm TSNP	alternative

Both LT8418 and 2EDL5014AA give practically the same switching (at 160 A, $R_{g,\text{on}} = 2 \Omega$: 82–83 V, bump about 1 V; $E_{\text{off}} + 1.5$ – $3 \mu\text{J}$ with the 2EDL). The 2EDL5014AA offers more voltage margin and easier assembly; its 6–9 Ω bootstrap switch must be checked at high modulation index.

Placement. The driver sits on the symmetry line so that both FETs of each switch are driven through equal stars (1.7 nH per branch), with Kelvin returns from each source pad. The common-source inductance is then only the pad and package part.

Gate resistors. Swept at 160 A: $R_{g,\text{on}}$ trades overshoot and Miller bump (lower bound) against E_{on} (upper bound). $R_{g,\text{off}}$ hardly changes E_{off} (turn-off is load-driven) but weakens hold-off.

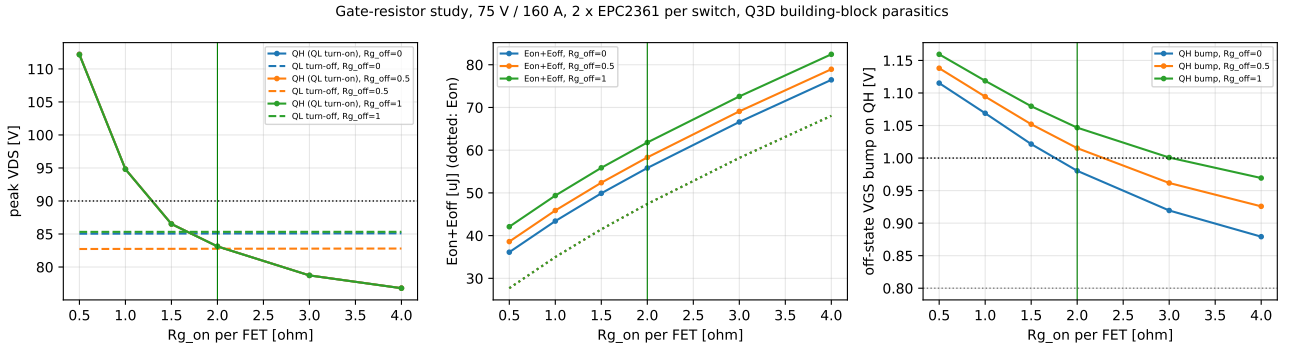


Figure 4: Gate-resistor study (LTspice with Q3D parasitics). Selected $R_{g,\text{on}} = 2 \Omega$, $R_{g,\text{off}} = 0 \Omega$: QH 83.1 V, QL 85.1 V, bump 0.98 V. EPC’s four-parallel motor-drive board uses much larger values (10 Ω on / 2 Ω off) because it deliberately limits dv/dt for the motor; a DPT-oriented power stage can switch faster.

Gate-loop damping: turn-on $R_{\text{tot}} = 3.0 \Omega$ gives $\zeta \approx 2.2$ (no V_{GS} overshoot); turn-off 0.6 Ω gives $\zeta \approx 0.44$ (–1.3 V undershoot, within –4 V).

8 Step 7 — Current sharing

A two-device sensitivity study (one parasitic changed at a time) identified what must be symmetric:

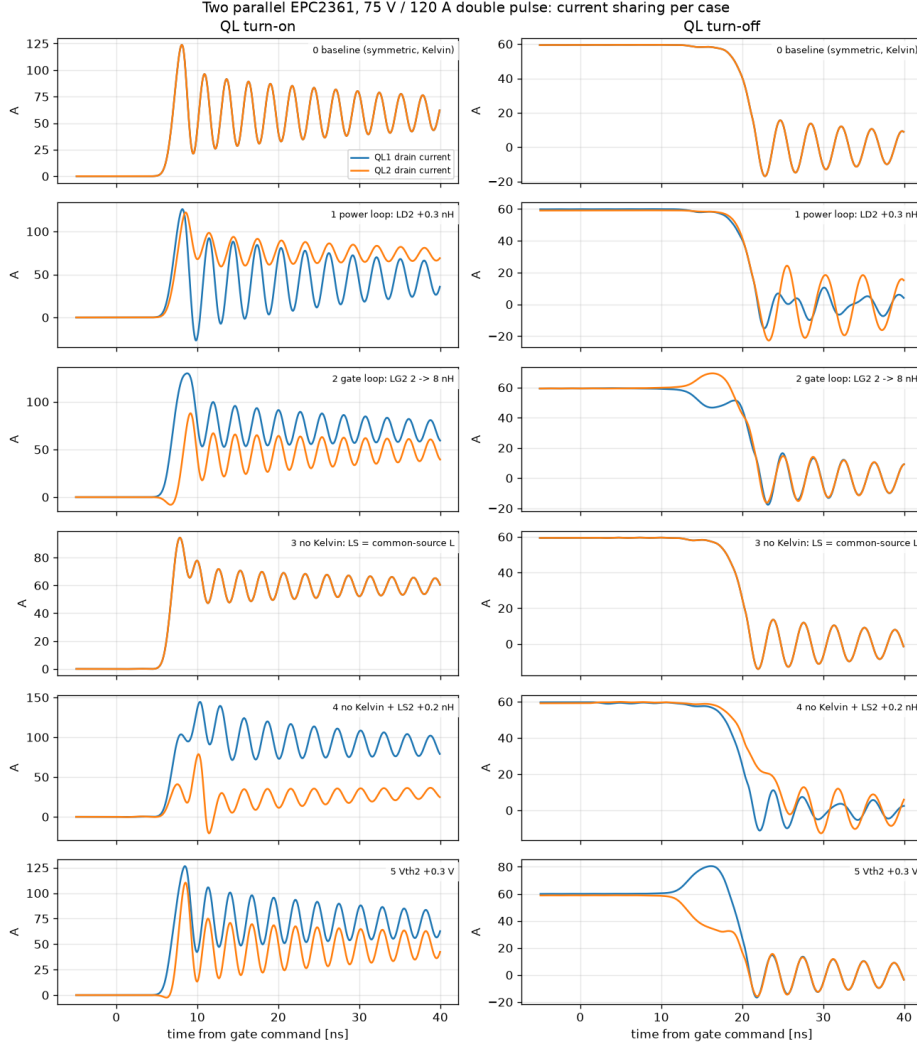


Figure 5: Drain currents of two paralleled EPC2361 at 75 V/120 A for six cases: baseline; drain inductance +0.3 nH (2% imbalance, energy shift); gate loop 2→8 nH (19%, 4:1 E_{on} split); no Kelvin, symmetric (slower, +47% E_{on}); no Kelvin with common-source imbalance (29%); $V_{th} + 0.3$ V (7%, 2:1 E_{off} split).

The gate-loop case explains the centre driver: a mismatch delays one gate by about $\Delta L_G / R_{tot} \approx 2$ ns, half of the 4 ns transition, so one device takes most of the switching. A side-mounted driver would give 2.0 vs 7.7 nH (Q3D); the centre driver gives equal branches. On the building block the two FETs carry 78.53 and 78.63 A at turn-off and their waveforms overlap.

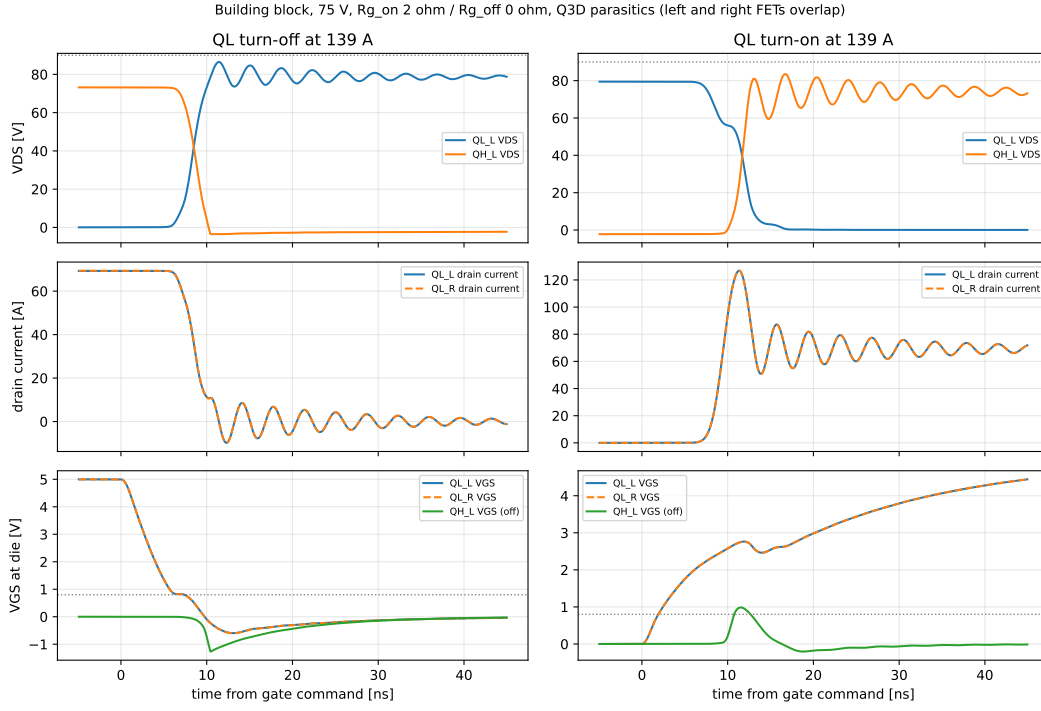


Figure 6: Building-block switching at the rated peak current with the selected resistors; left and right FETs overlap.

9 Step 8 — DC link

Ripple current per leg: up to $50 A_{\text{rms}}$ for a leg on its own, $28.8 A$ at the rated point. Three legs on one bank: up to $65 A$ in total. Required effective capacitance $\approx \hat{I} / (4f_{\text{sw}}\Delta V_{\text{pp}})$: $78 \mu\text{F}$ per leg for $\pm 2\%$ at 50 kHz when three legs share a module link; half at 100 kHz . This is the second benefit of a higher f_{sw} : a smaller and denser DC link. Selected: $24 \times 10 \mu\text{F}$ 1210 + $12 \times 1 \mu\text{F}$ 0805 ($77 \mu\text{F}$ effective); $0.9\text{--}2.1 A_{\text{rms}}$ per capacitor from a Q3D-based current-division analysis. Details: DC-link report.

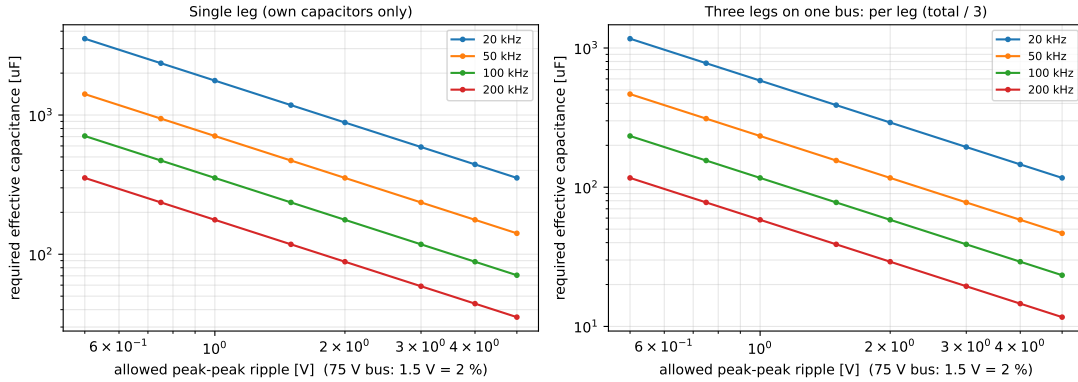


Figure 7: Required effective capacitance versus allowed ripple for 20–200 kHz.

10 Step 9 — Losses, thermal and power density

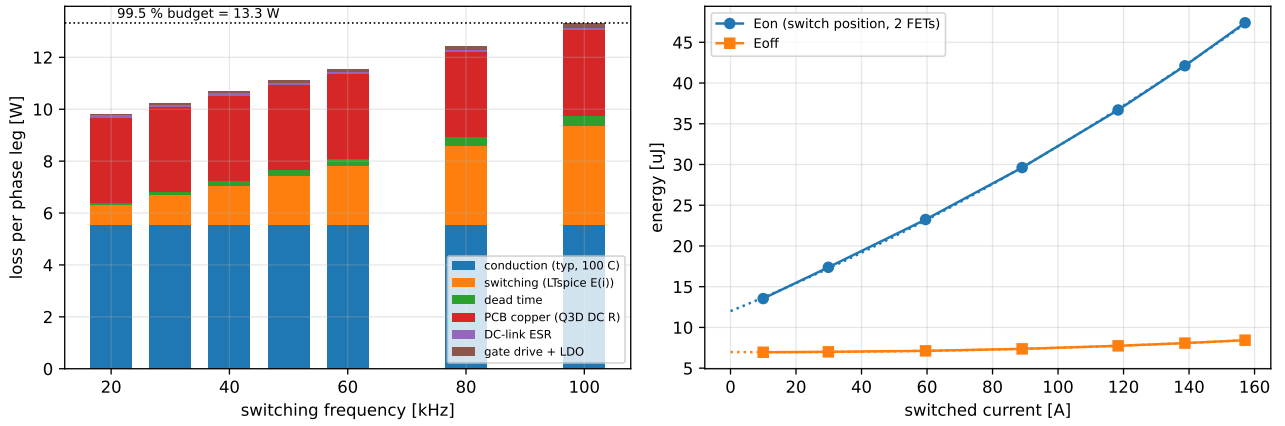


Figure 8: Loss per leg versus f_{sw} and switching energy versus current (LTspice with Q3D parasitics).

At 50 kHz: conduction 5.55 W, PCB copper 3.30 W, switching 1.91 W, dead time 0.20 W, other 0.16 W, total 11.12 W, efficiency 99.58 % (99.51 % with maximum $R_{DS(on)}$). Conduction and copper are about 80 % of the loss, so at 50 kHz cooling and copper matter more than switching speed. This is why the gate resistors could be chosen for safety ($2\ \Omega$) rather than minimum E_{on} .

Thermal: about 1.91 W per device; with 0.2 K/W junction-to-case, about 1.9 K/W TIM and a 60 °C heat sink, $T_j \approx 64\ ^\circ\text{C}$. Power density (board level): 2.65 kW on 8.5 cm², i.e. 0.31 kW/cm² (0.36 kW/cm² at $M = 1.15$), about 764 kW/L including the tallest components but excluding cooling and busbars.

11 Step 10 — Optimisation opportunities for the next iteration

Measure	Expected effect	Cost / risk
DC busbar contacts next to each cell (not above the bank)	copper loss about -1 to -1.5 W	mechanical design
AC contact directly on the L1 AC islands	AC copper loss about -0.7 W	busbar/clip
3–4 oz on L3/L4 only	about -0.9 W	cost; keep L1/L2 thin
L1–L2 prepreg 0.075 mm	loop -12% , allows lower $R_{g,on}$ and E_{on}	fabrication capability, insulation
2EDL5014AA driver	+20 V margin, Miller clamp, easier assembly	bootstrap recharge at high M
Three devices per switch	-1.3 W at 50 kHz	area, loop length, sharing
Raise f_{sw} to 100 kHz	winding ripple and DC link halved	loss at the 99.5 % limit unless the copper measures above are taken

Combining the copper measures (about -2 W) would allow 100 kHz at about 99.57 %, i.e. the same efficiency as today's 50 kHz design with half the winding ripple and half the DC-link capacitance.

12 Verification status and next steps

All results are from analysis, Q3D extraction and LTspice; none are measured. The models were cross-checked against published references where possible: the loop inductance against EPC's 0.35–0.4 nH optimal-layout range, the DC-link formulas against Kolar & Round, and the component choices against EPC9186 and EPC90156. Next steps:

1. Double-pulse board: overshoot vs R_g , E_{on}/E_{off} , per-device current (shunts), high-side gate bump.
2. Route the board, re-extract with Q3D, update the SPICE model.

3. When the machine is selected: check the winding-ripple requirement of Step 3 and evaluate machine-side PWM losses (separate study).
4. Confirm MLCC DC-bias data, driver availability and bootstrap behaviour at high modulation index.
5. Thermal test with the chosen TIM and heat sink.

Decision summary

Decision	Choice	Main reason
Module voltage	75 V	100 V GaN with 15 V overshoot margin
Devices per switch	$2 \times$ EPC2361	meets 99.5 % with margin; knee of the loss curve
Switching frequency	50 kHz (100 kHz capable)	efficiency margin; smaller DC link and ripple; final value after machine selection
Loop	vertical, 0.1 mm L1–L2, caps at QH	0.37 nH per cell (Q3D)
Layout	mirrored cells, centre driver	equal gate stars and loops, <0.1 % mismatch
Driver	LT8418 (2EDL5014AA alternative)	4 A class, bootstrap protection
Gate resistors	2Ω on / 0Ω off	≤ 90 V and ≤ 1 V bump at 160 A
Copper	2 oz all layers	copper loss $4.7 \rightarrow 3.3$ W
DC link	$24 \times 10 \mu\text{F} + 12 \times 1 \mu\text{F}$	± 2 % at 50 kHz on a shared bus