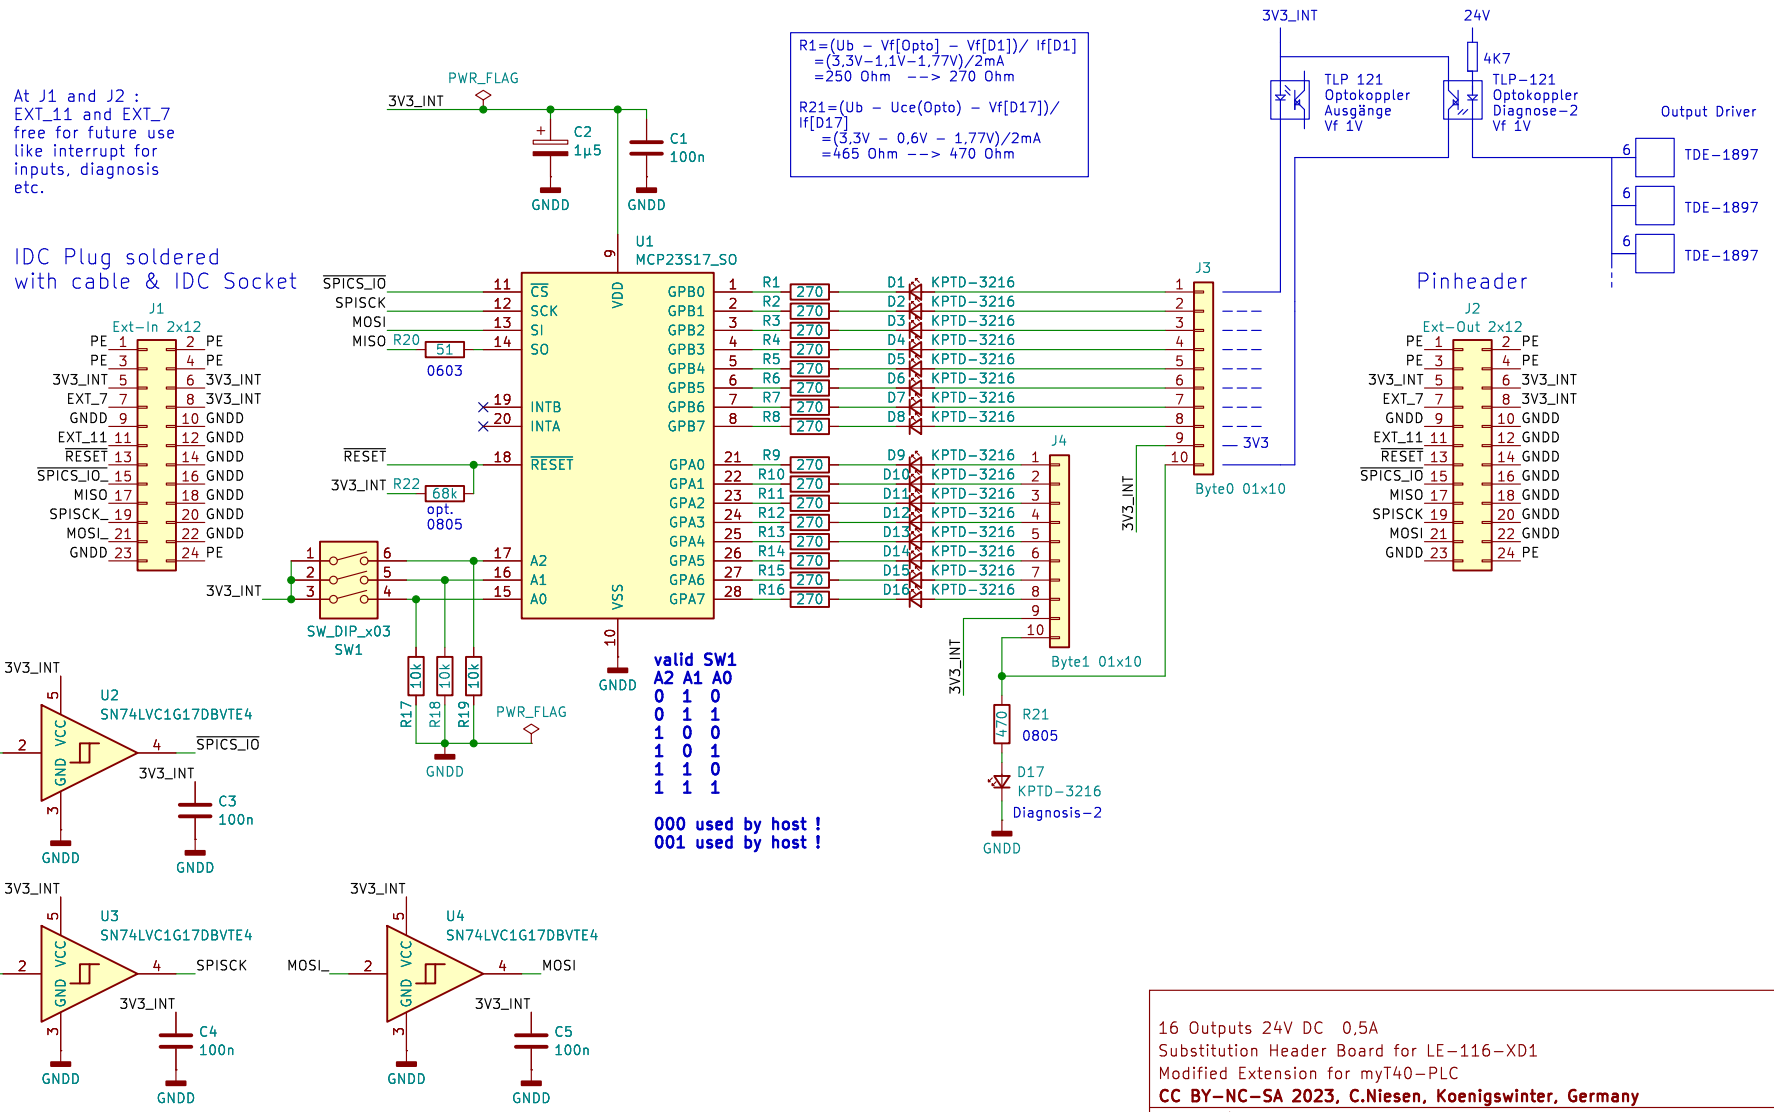
At J1 and J2 :
EXT_11 and EXT_7
free for future use
like interrupt for
inputs, diagnosis
etc.
IDC Plug soldered
with cable & IDC Socket
R1=(Ub – Vf[Opto] – Vf[D1])/ If[D1]
=(3,3V–1,1V–1,77V)/2mA
=250 Ohm –> 270 Ohm
R21=(Ub – Uce(Opto) – Vf[D17])/
If[D17]
=(3,3V – 0,6V – 1,77V)/2mA
=465 Ohm –> 470 Ohm
3V3_INT
24V
4K7
TLP 121
Optokoppler
Ausgänge
Vf 1V
TLP–121
Optokoppler
Diagnose–2
Vf 1V
Output Driver
TDE–1897
TDE–1897
TDE–1897
PWR_FLAG
C2
1µ5
C1
100n
GNDD
U1
MCP23S17_SO
J1
Ext–In 2x12
J2
Ext–Out 2x12
Pinheader
J3
Byte0 01x10
J4
Byte1 01x10
SPICS_IO
SPISCK
MOSI
MISO
R20
51
0603
RESET
R22
68k
opt.
0805
SW_DIP_x03
SW1
R17
R18
R19
10k
valid SW1
A2 A1 0
0 1 0
0 1 1
1 0 0
1 0 1
1 1 0
1 1 1
000 used by host !
001 used by host !
R21
470
0805
D17
KPTD–3216
Diagnosis–2
U2
SN74LVC1G17DBVTE4
U3
SN74LVC1G17DBVTE4
U4
SN74LVC1G17DBVTE4
C3
C4
C5
16 Outputs 24V DC 0,5A
Substitution Header Board for LE–116–XD1
Modified Extension for myT40–PLC
CC BY–NC–SA 2023, C.Niesen, Koenigswinter, Germany
Sheet: /
File: myT40_Ext_116–XD1.kicad_sch
Title: myT40–116–XD1
Size: A4
Date: 2024–01–29
Rev: 1.0.1
KiCad E.D.A. 9.0.4
Id: 1/1