


Visual Studio 2005 C# programming example

Windows XP Pro, Visual Studio 2005 C#, OPOS CO 1.9. ID TECH SO 1.9.52

1. Create a "Windows Application" Project.
2. Insert the "OPOS MSR Control 1.9.00" into the Toolbox: right-click the toolbar "Toolbox" and select the menu item "Choose item ...", and choose "OPOS MSR Control 1.9.00" in the tab "COM Components".

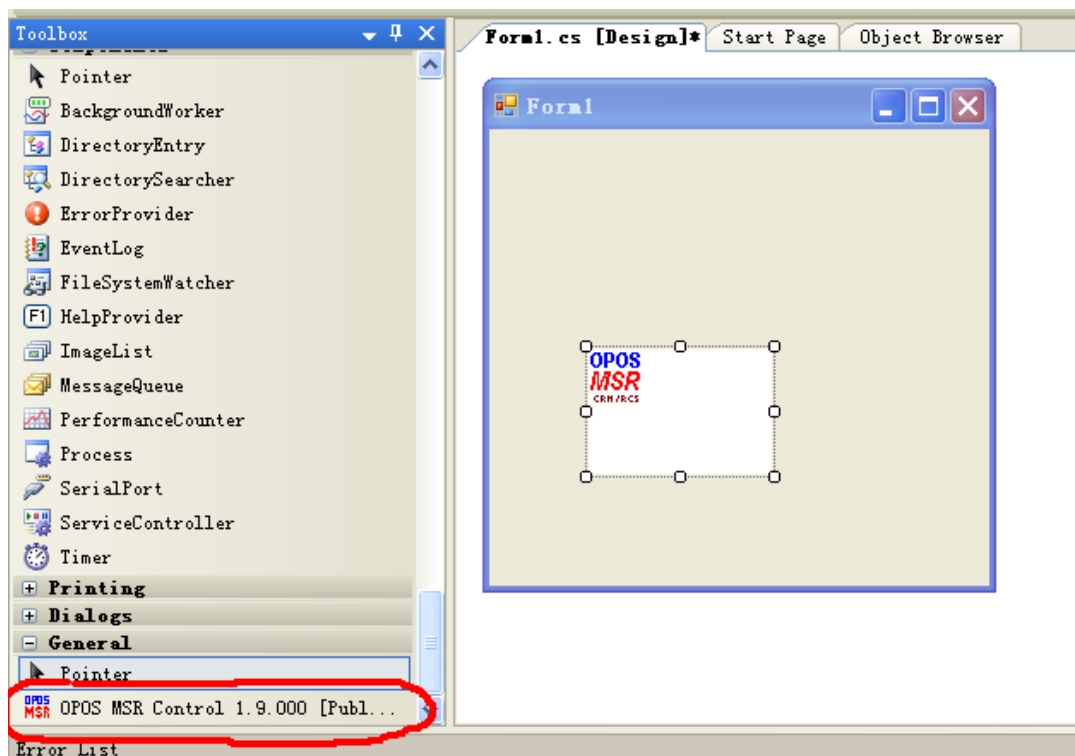

3. Add "OPOS MSR Control" to "Form1", and double-click it to add the "DataEvent" handler code which is automatically generated by the wizard.

```
private void Form1_Load(object sender, EventArgs e)
{
    if (axOPOSMSR1.Open("IDTECH_MMII_USBHID") == 0 /* OPOS_SUCCESS */)
    {
        axOPOSMSR1.ClaimDevice(100);

        axOPOSMSR1.DeviceEnabled = true;

        axOPOSMSR1.DataEventEnabled = true;
    }
}
```

```

    }

}

private void axOPOSMSR1_DataEvent(object sender,
AxOposMSR_1_9_Lib._IOPOSMSREvents_DataEventEvent e)

{

    MessageBox.Show(axOPOSMSR1.Track1Data, "Track 1 data");

    axOPOSMSR1.DataEventEnabled = true;

}

```

4. Running program, and swipe a card with some data in track 1.

