READINGS

Click on Add to table to add on the value for P3.

P1: 40 dB

P2: 69 dB

P3: 44 dB

Note down the readings for P3 using VSWR Meter.

P3: 44 dB

Beam Voltage: 250 V

Reflector Voltage: 180 V

Add To Table | Calculate


Coupling Coefficient:

P1-P3 = -4 dB

Isolation:

P1-P2 = -29 dB

Measurement of Scattering Parameters of Magic Tee

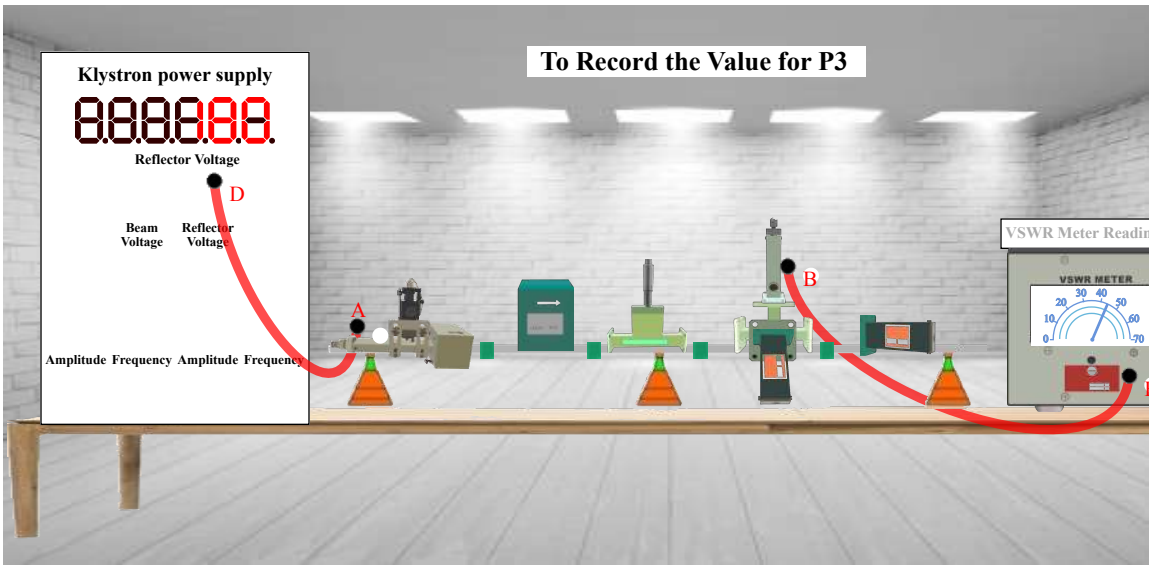

Components | Check Connections | Experiment setup | Print | Reset

© 2023 Virtual Labs, IIT Roorkee

READINGS

Click on Add to table to add on the value for P1.

P1: 40 dB

P2: dB

P3: dB

Note down the readings for P1 using VSWR Meter.


P1: 40 dB

Beam Voltage: 250 V

Reflector Voltage: 180 V

Add To Table

Measurement of Scattering Parameters of Magic Tee

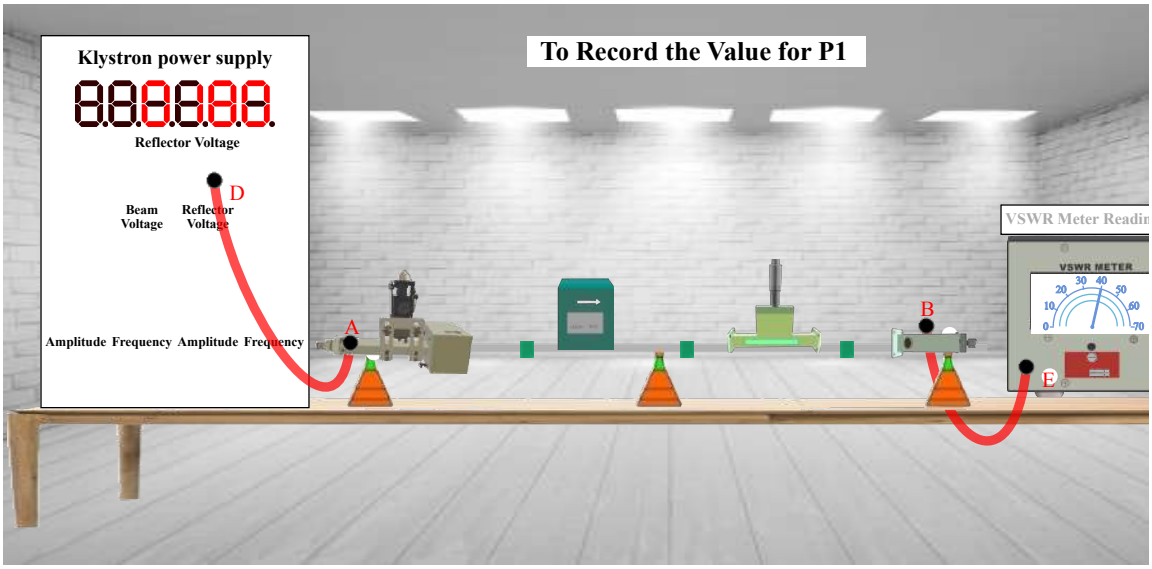

Components | VSWR Meter | Check Connections | Experiment setup | Print | Next | Re

© 2023 Virtual Labs, IIT Roorkee

READINGS

Click on Add to table to add on the value for P2.

P1: 40 dB

P2: 69 dB

P3: dB

Note down the readings for P2 using VSWR Meter.


P2: 69 dB

Beam Voltage: 250 V

Reflector Voltage: 180 V

Add To Table

Measurement of Scattering Parameters of Magic Tee

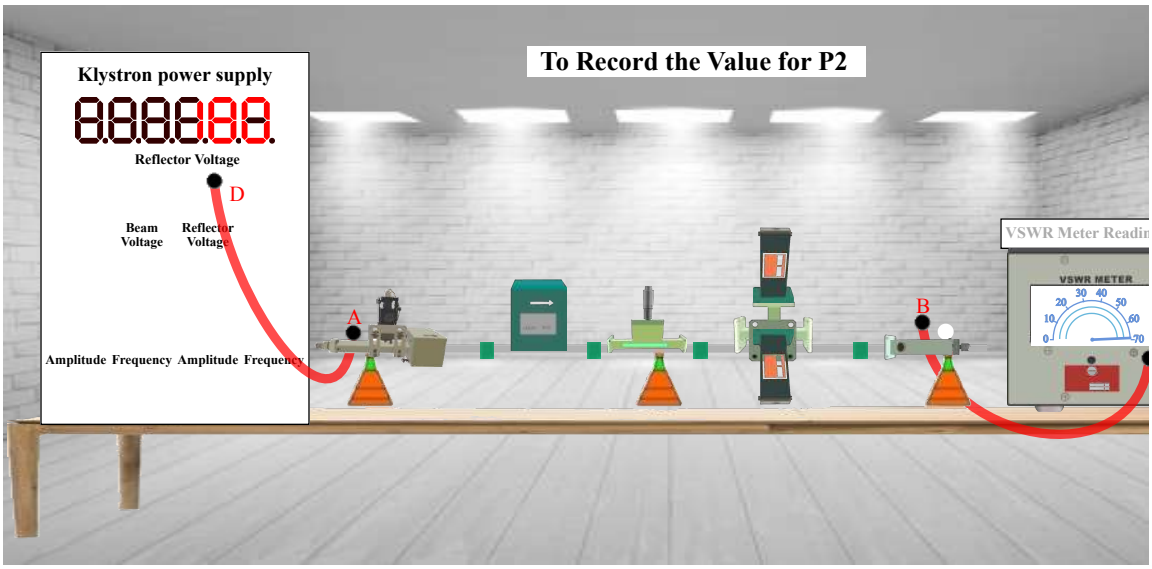

Components | Check Connections | Experiment setup | Next | Print | Reset

© 2023 Virtual Labs, IIT Roorkee