

Signalling hooter HPW 12

Universal sounder for dry and damp rooms



Overview

The HPW 12 Signalling Hooter is a sounder used for warning and calling purposes. Its robust housing allows for applications in dry and damp rooms and even outdoors.

The device is driven by a powerful, non-polarized electromagnet with an adjustable tappet that hits the membrane 100 to 120 times per second.

The signalling hooter housing is made of impact-resistant thermoplastic.

The hooter is supplied over a M20 self-sealing grommet for line diameters of 8-12 mm.

Features

- Also suitable for outdoor applications
- Ingress protection IP 55
- Impact-resistant thermoplastic
- Volume: approx. 108 dB(A) in 1 m distance


Specifications

Housing	Thermoplastic (ABS), impact-resistant
Colour	Grey
Ingress protection	IP 55 according to IEC 60529
Protection class	II
Cable glands	Self-sealing grommet M20 for line diameters of 8-12 mm
Connection terminals	Terminal capacity: 1.5 mm²
Volume	Approx. 108 dB(A), in 1 m distance
Operating conditions	Indoors and outdoors
Operating position	Sound outlet facing downward
Operating mode	Continuous operation
Temperature range	
Operation	-20 °C to +60 °C
Storage	-30 °C to +80 °C
Weight	0,9 kg


Ordering data

Type	Designation	Nominal voltage	Tolerance	Nominal current	Art. No.
HPW 12	Signalling hooter	24 VAC, 50 Hz	+10/-15 %	0,65 A	FHF 212 261 03
HPW 12	Signalling hooter	42 VAC, 50 Hz	+10/-15 %	0,3 A	FHF 212 261 04
HPW 12	Signalling hooter	110 VAC, 50 Hz	+10/-15 %	0,15 A	FHF 212 261 06
HPW 12	Signalling hooter	230 VAC, 50 Hz	+10/-15 %	0,07 A	FHF 212 261 07
HPW 12	Signalling hooter	120 VAC, 60 Hz	+10/-15 %	0,15 A	FHF 212 262 06
HPW 12	Signalling hooter	240 VAC, 60 Hz	+10/-15 %	0,07 A	FHF 212 262 07
HPW 12	Signalling hooter	12 VDC	+10/-15 %	0,6 A	FHF 212 261 12
HPW 12	Signalling hooter	24 VDC	+10/-15 %	0,3 A	FHF 212 261 13
HPW 12	Signalling hooter	60 VDC	+10/-15 %	0,15 A	FHF 212 261 15
HPW 12	Signalling hooter	110 VDC	+10/-15 %	0,08 A	FHF 212 261 16
HPW 12	Signalling hooter	220 VDC	+10/-15 %	0,05 A	FHF 212 261 17

General arrangement drawing (All dimensions in mm)

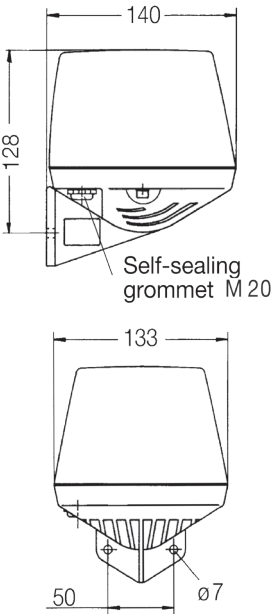

Connection diagram

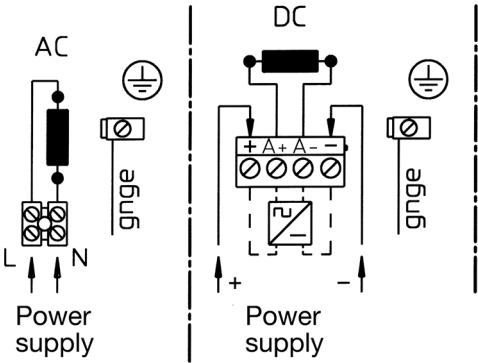

Note: All specifications, dimensions, weights and tolerances are nominal (typical) and Eaton reserve the right to vary all data without prior notice. No liability is accepted for any consequence of use.