

10 / 16 FKUD .. & 10 / 16 FKVD ..

Crane Station



Features and Functions

- Robust crane station for stationary or mobile use in industrial environments
- 10 or 16 configurable direct call keys
- Configuration of up to 16 channels, 1 channel is preset
- 2 external, freely configurable control inputs
- Available as VHF or UHF version
- 2 configurable control outputs

INDUSTRONIC crane stations ensure flexible wireless communication in industrial environments. They are easy to operate, extremely robust and can be easily integrated into an already existing PMR network. They can also communicate with an INDUSTRONIC communication system.

The dynamic microphone and the premium speaker ensure superior quality of voice transmission and enable clear communication, even at high ambient noise levels.

Design

The crane station of the 10 / 16 FKUD .. or 10 / 16 FKVD .. series consists of a crane operator station and a radio device which is installed in a separate housing (control unit). The crane operator station provides 10 momentary switches or 16 membrane keys, a microphone, and a speaker module.

Depending on the application, the control unit is either equipped with a radio device for the 70 cm UHF range (DM1400/EU UHF) or the 2 m VHF range (DM1400/EU VHF). This radio device can be used in private PMR networks. Prior to commissioning, a license for the use of frequencies must be acquired from the corresponding national authority.

Two inputs and two outputs as well as one external AF output are pre-wired at external terminals of the control unit. The inputs can be used for potential-free contacts, e.g. for a foot switch. One control output can be used together with an AF output to activate an external amplifier. The second output can be used to activate a flashing beacon, for example.

Call Control and Configuration

Selective calling (5-tone calling) can be used for call control. The configuration is performed by INDUSTRONIC using a standard PC and the parameters are permanently stored in the crane station.

Other Features

- Call storage configurable for each control unit
- Transmitting power of up to 25 W
- Interface to INDUSTRONIC systems
- One audible signal generator and two audible signal analyzers can be configured for each key
- Key or control input can be configured with the function "repeat call/ talk back"
- 1 separate AF output

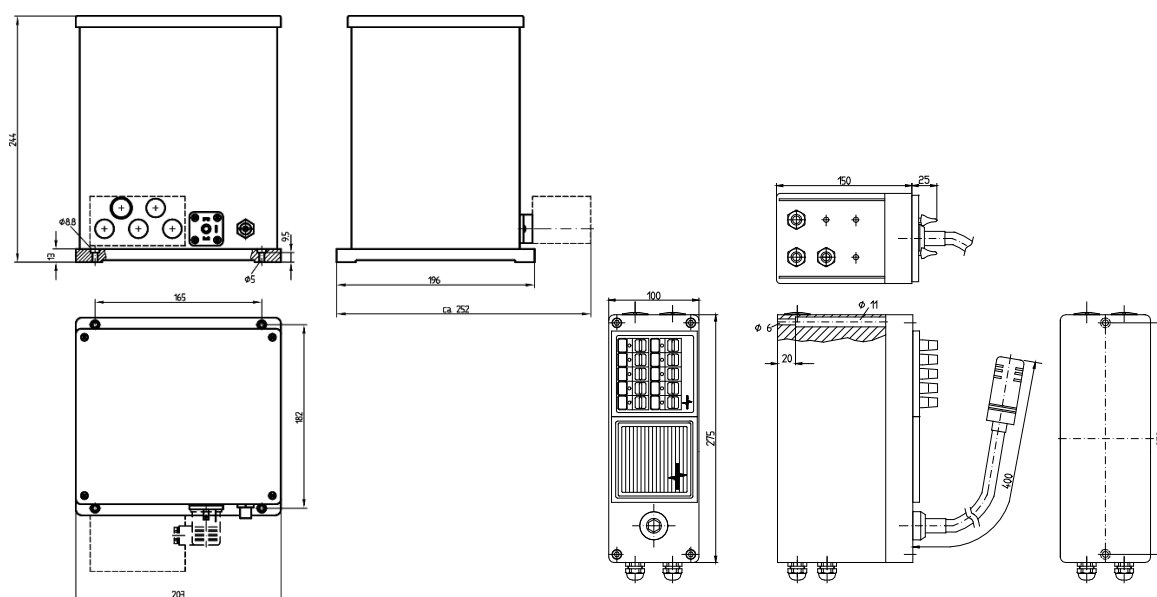


Figure: Dimensional drawing 10 / 16 FKUD .. or 10 / 16 FKVD ..

Mechanical Data Crane Operator Station

- | | |
|--------------------------|--|
| • Width x height x depth | 275 mm x 100 mm x 150 mm
(10.83" x 3.94" x 5.91") |
| • Housing material | Glass-fiber reinforced polyester |
| • Weight | Approx. 3.6 kg (approx. 7.94 lbs) |
| • Cable length | 8 m |

Mechanical Data Housing of Control Unit

- | | |
|--------------------------|---|
| • Width x height x depth | 203 mm x 244 mm x 196 mm
(7.99" x 9.61" x 7.72") |
| • Housing material | Aluminum |
| • Weight | Approx. 5 kg (approx. 11.02 lbs) |

Electrical Data

• Operating voltage	110 VAC / 230 VAC 24 VDC
• Microphone	Noise-canceling with dynamic compression
• Microphone amplifier	Amplifier with compressor
• Loudspeaker	Max. 1 W / 8 Ohms
• 5-tone selective calling	ZVEI 1

Electrical Data Radio Device in Control Unit (DM1400 UHF / DM1400 VHF)

• Transmitting power	Adjustable 1 W to 25 W
• Frequency range	VHF: 146 MHz to 174 MHz UHF: 403 MHz to 470 MHz
• Channel spacing	12.5 kHz / 20 kHz / 25 kHz
• Modulation limiting	+/- 2.5 kHz at 12.5 kHz +/- 4 kHz at 20 kHz +/- 5 kHz at 25 kHz
• Receiver sensitivity	<0.3 μ V (12 dB SINAD)
• Intermodulation (ETS)	>65 dB
• Frequency stability	+/- 2.5 PPM
• Antenna impedance	50 Ohms
• Standards	EN 300 086 EN 300 113 EN 300 219 EN 301 489-1 EN 301 489-5 EN 62368-1

Environmental Requirements and Standards

• Ambient temperature during operation	-20 °C to +70 °C (IEC 68-2-1/2) (-4 °F to +158 °F)
• Relative humidity (non-condensing)	93 % (IEC 68-2-3)
• Degree of protection	Crane operator station: IP40 Control unit: IP65

Series Overview Chart	Keys	Operating Voltage	Frequency Range	Type	Type Number
	10	110/230 VDC	403 – 470 MHz	10 FKUD 01	380-799-176
	10		136 – 174 MHz	10 FKVD 01	380-799-177
	10		-	10 FKxD 01	380-799-178
	10	22 – 32 VDC	403 – 470 MHz	10 FKUD 02	380-799-179
	10		136 – 174 MHz	10 FKVD 02	380-799-180
	10		-	10 FKxD 02	380-799-181
	16	110/230 VDC	403 – 470 MHz	16 FKUD 01	380-799-182
	16		136 – 174 MHz	16 FKVD 01	380-799-183
	16		-	16 FKxD 01	380-799-184
	16	22 – 32 VDC	403 – 470 MHz	16 FKUD 02	380-799-185
	16		136 – 174 MHz	16 FKVD 02	380-799-186
	16		-	16 FKxD 02	380-799-187

INDUSTRONIC®

Industrie-Electronic GmbH & Co. KG
Carl-Jacob-Kolb-Weg 1
97877 Wertheim / Germany

Phone: +49 9342 871-0
Fax: +49 9342 871-565

info@industronic.de
www.industronic.com