

# BG3 range manual call point

Intrinsically safe (Ex ia), weatherproof



## Overview

Weatherproof to IP66 and IP67 and available certified intrinsically safe, simple apparatus or uncertified.

The units are manufactured from glass reinforced polyester (GRP) which provides a robust, corrosion free construction and ensures effective and reliable operation in harsh industrial and offshore environments.

Units are supplied in natural red GRP or painted to customer specification. 'Burning House' duty label is provided as standard, other duty and tag labels may be supplied to customer specification.

## Features



- Zone 0, Zone 1 and Zone 2 use
- ATEX certified
- IP66 and IP67
- Certified temperature: -55°C to +55°C
- Corrosion free GRP
- Optional in line/end of line resistors/diodes
- Optional LED indicator
- Optional lift flap
- Key operated test facility
- Various body colours available



## Certification and specification

| BG3I                  |                                                                                                                                                                                                                                 |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Protection            | Explosion protected Ex ia dust-tight & weatherproof (intrinsically safe)                                                                                                                                                        |
| Certification         | Cert. no BAS00ATEX1067X<br>Certified to: EN50014, EN50020, EN50284<br>ATEX Ex ia IIC T4<br>Suitable for use in Zones 0, 1 & 2                                                                                                   |
| Voltage               | Up to 28V (IS)                                                                                                                                                                                                                  |
| Certified temperature | -55°C to +55°C                                                                                                                                                                                                                  |
| Ingress protection    | IP66 & IP67                                                                                                                                                                                                                     |
| Terminals             | 6 x 4.0mm <sup>2</sup>                                                                                                                                                                                                          |
| Resistor values       | 470R minimum                                                                                                                                                                                                                    |
| LED indication        | A high intensity red LED can be fitted as an optional extra to indicate operation on all 24V systems<br>As standard the LED is not provided with over current protection.<br>The forward current (If) should be limited to 20mA |
| Cable entries         | 2 x M20 top or bottom                                                                                                                                                                                                           |
| Weight                | 0.5Kg                                                                                                                                                                                                                           |
| Material              | UV resistant glass reinforced polyester                                                                                                                                                                                         |
| Finish                | Natural red GRP or painted GRP to customer requirements                                                                                                                                                                         |
| Duty/tag labels       | Stainless steel as standard                                                                                                                                                                                                     |
| BG3W                  |                                                                                                                                                                                                                                 |
| Protection            | Dust-tight & weatherproof                                                                                                                                                                                                       |
| Certification         | Not applicable                                                                                                                                                                                                                  |
| Voltage               | Up to 250V a.c                                                                                                                                                                                                                  |
| Certified temperature | Not applicable                                                                                                                                                                                                                  |
| Ingress protection    | IP66 & IP67                                                                                                                                                                                                                     |
| Terminals             | 6 x 4.0mm <sup>2</sup>                                                                                                                                                                                                          |
| Switch ratings        | 30Vdc 3A<br>30-50Vdc 1A<br>250Vac 3A                                                                                                                                                                                            |
| Resistor values       | 270R minimum                                                                                                                                                                                                                    |
| LED indication        | A high intensity red LED can be fitted as an optional extra to indicate operation on all 24V systems<br>As standard the LED is not provided with over current protection.<br>The forward current (If) should be limited to 20mA |
| Cable entries         | 2 x M20 top or bottom                                                                                                                                                                                                           |
| Weight                | 0.5Kg                                                                                                                                                                                                                           |
| Material              | UV resistant glass reinforced polyester                                                                                                                                                                                         |
| Finish                | Natural red GRP or painted GRP to customer requirements                                                                                                                                                                         |
| Duty/tag labels       | Stainless steel as standard                                                                                                                                                                                                     |

## General arrangement drawing (all dimensions in mm)

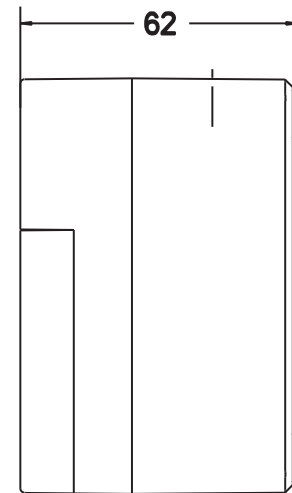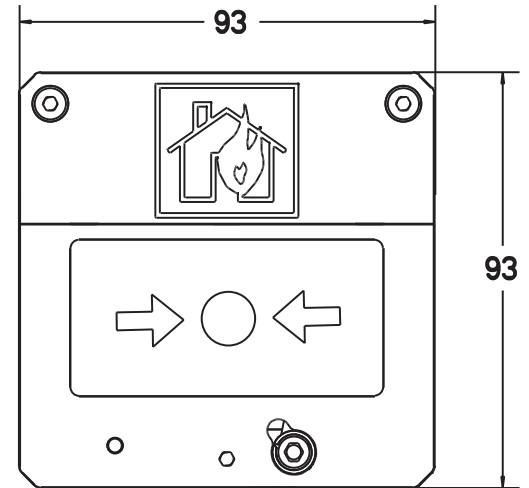

## Ordering requirements

The following code is designed to help in selection of the correct unit. Build up the reference number by inserting the code for each component into the appropriate box

### Model

BG3

### Certification

| Certification | Code |
|---------------|------|
| Weatherproof  | W    |
| Ex ia         | I    |

### Labels

| Label                         | Code |
|-------------------------------|------|
| Glass label                   | 1    |
| Fire break glass 'press here' | 2    |
| Break glass 'press here'      | 3*   |
| Special                       | 4    |
| European standard             | 5*   |
| Duty label (special)          | 6*   |
| Burning house as standard     |      |
| Tag label                     |      |

\*Specify wording

### Options

| Options                                | Code |
|----------------------------------------|------|
| None                                   | N    |
| Resistor series                        | S*   |
| Resistor EOL                           | E*   |
| Diode                                  | D    |
| Polycarbonate lift flap                | F    |
| Stainless steel lift flap              | C    |
| LED                                    | L    |
| Double changeover                      | T    |
| Plastic element (replaces break glass) | P    |

\* Please specify

### Entries

| Entries          | Code |
|------------------|------|
| 2 x M20 (bottom) | B    |
| 2 x M20 (top)    | T    |

For blanking plugs add "P" to code. e.g. BP, 2 x M20 bottom entries with one blanking plug

### Finish

| Finish      | Code |
|-------------|------|
| Natural red | R    |
| Blue        | B    |
| Green       | G    |
| White       | W    |
| Yellow      | Y    |
| Special     | S*   |

\* Please specify