

DB10 loudspeaker range up to 15 Watts

Ex de, weatherproof



Overview

This range of loudspeakers, intended for use in potentially explosive gas atmospheres, has a power rating of up to 15 Watts and is suitable for use in gas groups IIB plus hydrogen and IIC. The flamepaths, flare and body, are manufactured from a UV stable glass reinforced polyester. Stainless steel screws and mounting stirrup are incorporated to ensure a corrosion-free product.

Features

- Zone 1, Zone 2 & non-Ex use
- Ex de IIB + H₂ or IIC T4/T5/T6
- ATEX certified, Ex II 2G
- IECEx certified, Gb
- CCOE certified
- DNV type approved (IEC 60945)
- IP66 and IP67
- Certified temperature: -50°C to +65°C
- GRP corrosion-free flamepath
- 115dB(A) at 15 Watts at 1 metre
- 8 & 15 Watt versions
- Power tapings via integral transformer
- Ratcheted swivel mounting stirrup
- Fitted with 316L stainless steel fixtures
- Earth continuity available
- Retained cover screws
- Internal earth stud fitted as standard




ATEX Ex de IIB+H₂	Cert. no. Baseefa11ATEX0101X Certified to: EN60079-0, EN60079-1, EN60079-7 Ex II 2G, Ex de IIB + H ₂ , T4/T5/T6 Gb
ATEX Ex de IIC	Cert. no. Baseefa11ATEX0102X Certified to: EN60079-0, EN60079-1, EN60079-7 Ex II 2G, Ex de IIC T4/T5/T6 Gb
IECEx Ex de IIB+H₂	Cert. no. IECEx BAS 11.0041X Certified to: IEC60079-0, IEC60079-1, IEC60079-7 Ex de IIB + H ₂ , T4/T5/T6 Gb
IECEx Ex de IIC	Cert. no. IECEx BAS 11.0042X Certified to: IEC60079-0, IEC60079-1, IEC60079-7 Ex de IIC T4/T5/T6 Gb
Type approved	DNV (IEC 60945)


Material	Body & horn in anti-static, UV stable, glass reinforced polyester Mounting stirrup and fixtures in 316L stainless steel
Finish	All natural or body and horn can be painted to customer specification
Rated power	8 & 15 Watts RMS continuous (25°C)
Weight	Long Flare (15W): 4.5kg Gross weight. 3.6kg Net weight Short Flare (8W): 4kg Gross weight. 3.1kg Net weight
Ingress protection	IP66 and IP67
Entries	Up to 2 x M20 into Ex e chamber
Terminals	8 x 4.0mm ² or 4 x 4.0mm ²
Output	Maximum output for IIB unit @ 1W/1M is 105dB(A) Maximum output for IIB unit @ 15W/1M is 115dB(A) Maximum output for IIC unit @ 1W/1M is 98dB(A) Maximum output for IIC unit @ 15W/1M is 107dB(A)
Frequency range	400Hz to 8kHz
Certified temp	-50°C to + 40°C (T6) -50°C to + 55°C (T5) -50°C to + 65°C (T4)
Voice coil impedance	8Ω
Fire retardancy	GRP is fire retardant to IEC 60695-11-10
Mounting	Via stirrup with ratchet facility (supplied fitted)
Earth continuity	Internal/External earth stud linked to gland continuity
Labels	Optional stainless steel tag and duty labels
Transformer	100V line as standard

[illegible]

Terminals	Power	
	15 W	8 W
1:2 (HI)	15.0	8.0
1:3 (HI)	7.5	4.0
1:4 (HI)	3.75	2.0
1:2 (LO)	2.5	1.0
1:3 (LO)	1.25	0.5
1:4 (LO)	0.75	0.25

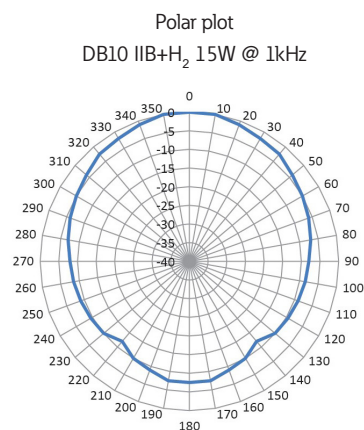

Frequency (Hz)	SPL (dB)
250	62
350	72
450	88
550	85
650	92
800	95
1000	97
1500	102
2000	102
3000	100
4000	98
5000	96
6000	92
8000	83

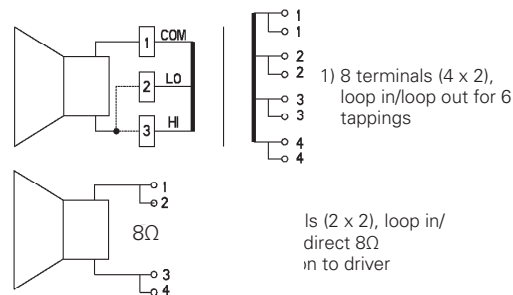

The following code is designed to help in selection of the correct unit. Build up the reference number by inserting the code for each component into the appropriate box.

Model	Certification	Gas group	Max rated power	Transformer	Options	Entries	Finish																																																						
DB10																																																													
	<table><tr><th>Certification</th><th>Code</th></tr><tr><td>ATEX</td><td>B</td></tr><tr><td>IECEx</td><td>J</td></tr></table>	Certification	Code	ATEX	B	IECEx	J	<table><tr><th>Group</th><th>Code</th></tr><tr><td>IIB + H₂</td><td>B</td></tr><tr><td>IIC</td><td>C</td></tr></table>	Group	Code	IIB + H ₂	B	IIC	C	<table><tr><th>Power</th><th>Code</th></tr><tr><td>8 Watt</td><td>8</td></tr><tr><td>15 Watt</td><td>15</td></tr></table>	Power	Code	8 Watt	8	15 Watt	15	<table><tr><th>Transformer</th><th>Code</th></tr><tr><td>Yes</td><td>X*</td></tr><tr><td>8Ω version</td><td>N</td></tr></table> *Std 100V Other voltages available, specify voltage	Transformer	Code	Yes	X*	8Ω version	N	<table><tr><th>Option</th><th>Code</th></tr><tr><td>None</td><td>N</td></tr><tr><td>Duty</td><td>D*</td></tr><tr><td>Tag</td><td>T*</td></tr><tr><td>Earth continuity including stud</td><td>ES</td></tr><tr><td>Ext. Earth stud (only)</td><td>S</td></tr></table> *Please specify wording	Option	Code	None	N	Duty	D*	Tag	T*	Earth continuity including stud	ES	Ext. Earth stud (only)	S	<table><tr><th>Entries</th><th>Code</th></tr><tr><td>1 x M20</td><td>1B</td></tr><tr><td>2 x M20</td><td>2B</td></tr><tr><td>2 x M20</td><td></td></tr><tr><td>entries with one certified plug fitted</td><td>2BP</td></tr></table>	Entries	Code	1 x M20	1B	2 x M20	2B	2 x M20		entries with one certified plug fitted	2BP	<table><tr><th>Finish</th><th>Code</th></tr><tr><td>Natural black</td><td>N</td></tr><tr><td>Red</td><td>R</td></tr><tr><td>Special</td><td>S*</td></tr></table> *Please specify	Finish	Code	Natural black	N	Red	R	Special	S*
Certification	Code																																																												
ATEX	B																																																												
IECEx	J																																																												
Group	Code																																																												
IIB + H ₂	B																																																												
IIC	C																																																												
Power	Code																																																												
8 Watt	8																																																												
15 Watt	15																																																												
Transformer	Code																																																												
Yes	X*																																																												
8Ω version	N																																																												
Option	Code																																																												
None	N																																																												
Duty	D*																																																												
Tag	T*																																																												
Earth continuity including stud	ES																																																												
Ext. Earth stud (only)	S																																																												
Entries	Code																																																												
1 x M20	1B																																																												
2 x M20	2B																																																												
2 x M20																																																													
entries with one certified plug fitted	2BP																																																												
Finish	Code																																																												
Natural black	N																																																												
Red	R																																																												
Special	S*																																																												