

PB alarm call points range

Hazardous areas, weatherproof



Overview

These manual alarm push buttons have been designed for use in hazardous environments and harsh environmental conditions.

The GRP enclosures are suitable for use onshore or offshore where light weight combined with a high level of corrosion resistance is required.

A high intensity red LED can be fitted to indicate to the operator that the units functionality with activated. The unit is now supplied with a lift flap that latches firmly in place.

European, Russian, Chinese and other worldwide approvals are available.



Features

- UL certified for USA and Canada:
 - Hazardous Locations
 - Class I, Div 2. Groups A,B,C & D
 - Class II, Div 2. Groups F&G
 - Class I, Zone 2
- ATEX certified
- Operating temperature:
 - 22°F to +131°F*
 - 30°C to +55°C*
- NEMA 4X & 6
- Corrosion Resistant GRP
- In line and end of line resistors
- Optional Red LED to indicate operation
- Retained stainless steel cover screws

*Model dependent



Certifications	
UL Haz Locs	Listing no. E186629 Class I, Div. 2. Groups A,B,C & D and Class 1, Zone 2 Class 2, Div. 2. Groups F & G
UL Ord Locs	Listing no. S8117. Fire alarm boxes
CSA	Cert. no. 79120 Class 1 groups A, B, C & D
SIL	SIL2 Certification to IEC61508. Cert no. 20151118-4786827453
Specifications	
Material	Glass reinforced polyester
Finish	Red painted finish as standard or to customers specification
Weight	2.6lbs / 1.2Kg - model dependent
Certified temp	-13°F to +131°F (-25°C to +55°C) -13°F to +122°F (-25°C to +50°C) With resistors or LED fitted -22°F to +104°F (-30°C to +40°C) CSA certified
Ingress protection	NEMA 4X & 6. IP66
Input voltage	Up to 240V a.c
Current	3A, 0-30Vdc: 1A, 30-50Vdc: 3A 240Vac (2A CSA): 0.05A with resistors
Terminals	7 or 9 x 12 AWG
Resistor values	Various Configurations available on versions up to 24V,470R minimum
LED indication	A Red LED can be fitted as an optional extra to indicate operation on versions up to 24V As standard the LED is not provided with over current protection. The forward current (If) should be limited to 20mA
Labels	Duty label - worded to customers specification. Riveted on Tag label - worded to customers specification. Screwed on

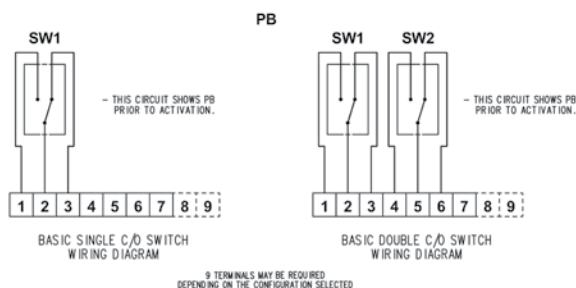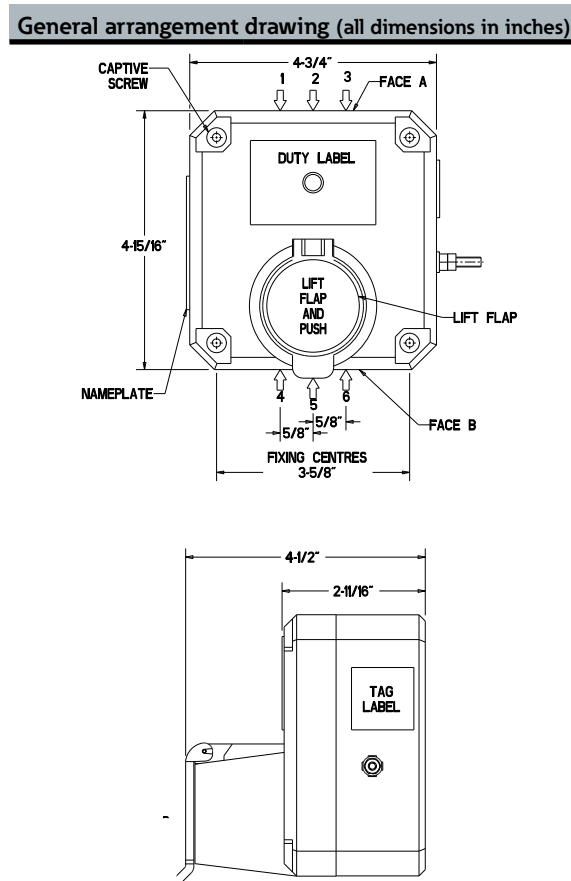

Ordering requirements

The following code is designed to help in selection of the correct unit. Build up the reference number by inserting the code for each component into the appropriate box

Model	Certification	Entries	Labels	Voltage	Switches	Options	Terminals	Finish	
PB									
Certification UL listed UL (ordinary location) CSA certified		Label None Duty label reqd Tag label reqd		Switches Single changeover Double changeover		Terminals 7 x 14 AWG (standard) 9 x 14 AWG (optional)		Finish Red (standard) Natural black Blue Yellow Grey Yellow/black stripes Special	
Code UL UW IC		Code 0 4* 5*		Code S D		Type 7 9		Code R N B Y G X S*	
Entries 1/2" NPT		Code *C		Voltage a.c. d.c.		Option None LED Resistor series Resistor EOL Earth continuity Self reset (momentary)		Code N A C* D* F** M	
* Prefix entry size (see diagram above) with entry position code e.g. 4C6C		* Specify wording on 4 or 5 as required		* Must be selected for CSA certified unit		* Specify values ** Must be selected when selecting CSA certification		* Please specify	