

UL Hazardous & Ordinary Locations



Introduction

The PH1 double action pull handle call point has been designed for use in flammable atmospheres and harsh environmental conditions. The GRP enclosure is suitable for use offshore or onshore where light weight combined with a high level of corrosion resistance is required.

The large "Lift" and "Pull" GRP handles can be operated effortlessly whilst wearing industrial gloves and require double action to raise the alarm, preventing accidental activation.

Features

- UL Listed for:
 - Hazardous Locations.
 - Class I, Division 1. Groups B, C & D.
 - Class I, Division 2. Groups A-D.
 - Zone 1.
 - Ordinary Locations: Fire alarm boxes.
- IECEx certified.
- ATEX certified.
- NEMA 4X & 6. IP66 & IP67.
- Certified temperature: -58°F to + 158°F.
-50°C to + 70°C
- Corrosion free GRP construction.*
- Optional in line, end of line resistors and diodes.
- Retained stainless steel cover screws.


**Model dependent.*




Certification and Specification

UL Haz Locs:	UL listed for USA and Canada. Listing no. E186629. Class I, Div. 1. Groups B, C & D. Class I, Div. 2. Groups A- D. Class I, Zone 1, AEx d IIC, Ex d IIC. Class II, Div.2, Groups F & G. Class III.
UL Ord Locs:	UL Listing no. S8117. Fire alarm boxes. UL for USA and Canada.
Material:	Body/covers/handles:- GRP (glass reinforced polyester). UL Class I. Div. 1 Inner Cover: 316 (ANC4B) Stainless Steel. Fixings:- Stainless steel grade 316.
Finish:	Cover:- natural red, Body:- natural black. Handles:- natural white. Cover may be painted to customer's requirements.
Voltage:	0-50Vdc, 0-254Vac.
Switch Rating:	1 or 2 c/o switches, 254V, 3A max.
Weight:	UL Class I, Div. 1: Gross weight 4.4 Kg. Net weight 3.8Kg. UL Class I, Div 2, UW: Gross weight 3.2kg. Net weight 2.6kg.
Certified Temp:	-58°F to + 158°F (-50°C to + 70°C).
Ingress Protection:	NEMA 4X & 6. IP66 & IP67.
Entries:	UL Class I, Div. 1 - Max 1 per face. Up to 2 x 1/2" NPT or 3/4" NPT. Positions 2 & 5 only. UL Class I, Div. 2, UW: Up to 2 x 1/2" or 3/4" NPT. 3/4" NPT, Max. 1 per face & positions 2 & 5 only. Please note that certified blanking plugs cannot be fitted to this product.
Terminals:	6 x 14AWG as standard. Contact MEDC for options.
Earth Continuity:	Earth continuity is provided by internal plate.
Duty Labels:	'Burning house' label fitted as standard on red units. Red blank duty label fitted as standard on all other colour units, unless text is supplied by customer. Tag Label: worded to customers requirements.
Addr. module:	SIGA-CT1 (To be free issued by customer).
Resistors:	Various configurations available, 470 Ohms minimum.
Diodes:	Various configurations available.

Standard wiring - switch only.




Standard wiring - c/w EOL resistor.




R1 - EOL Resistor.

Standard wiring - c/w series resistor or series & EOL resistor.

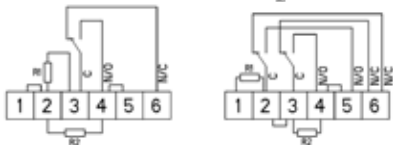

R1 - Series Resistor.

R2 - EOL Resistor (if fitted).

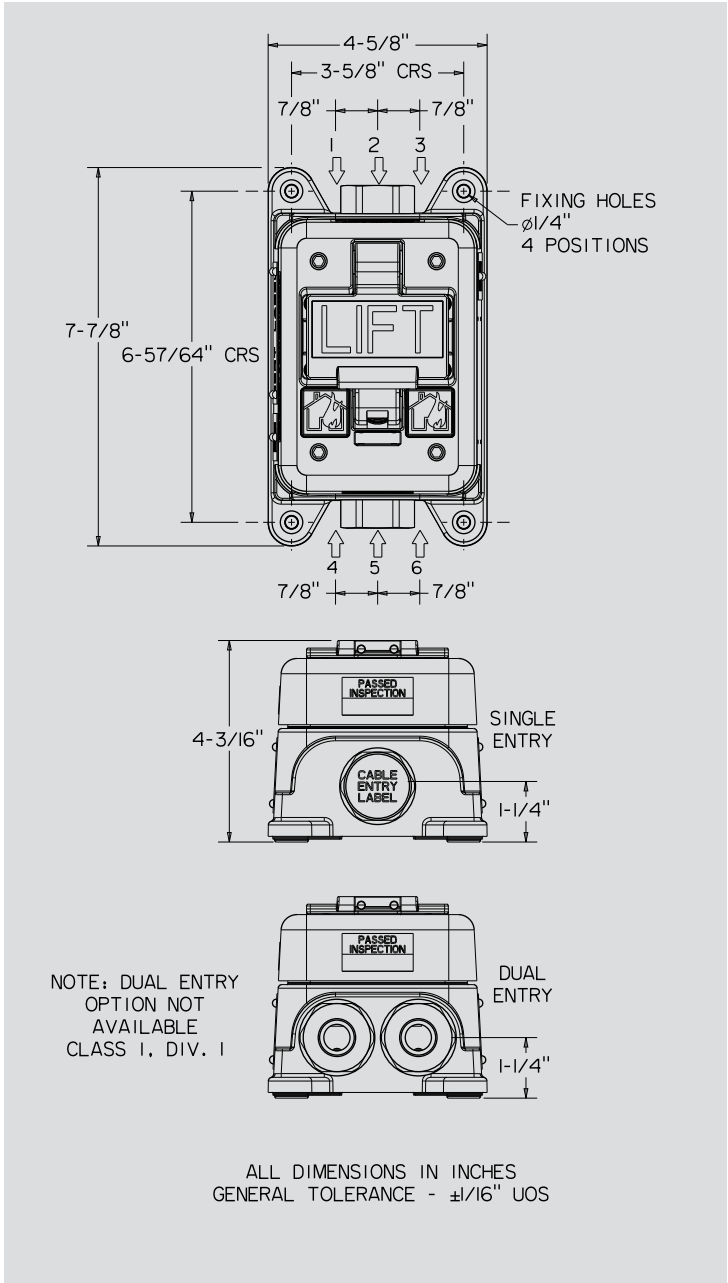

Ordering Requirements

The following code is designed to help in selection of the correct unit. Build up the reference number by inserting the code for each component into the appropriate box.

Model PH1	Certification 	Entries 	Switches 	Options 	Finish 																																														
	<table><tr><th>Certification</th><th>Code</th></tr><tr><td>UL Class I, Div. 1</td><td>UL1</td></tr><tr><td>UL Class I, Div. 2</td><td>UL2</td></tr><tr><td>UL Ord. Loc.</td><td>UW</td></tr></table>	Certification	Code	UL Class I, Div. 1	UL1	UL Class I, Div. 2	UL2	UL Ord. Loc.	UW	<table><tr><th>Entries</th><th>Code</th></tr><tr><td>1/2" NPT</td><td>*†M</td></tr><tr><td>3/4" NPT</td><td>*†N</td></tr></table>	Entries	Code	1/2" NPT	*†M	3/4" NPT	*†N	<table><tr><th>Switches</th><th>Code</th></tr><tr><td>Single changeover</td><td>S</td></tr><tr><td>Double changeover</td><td>D</td></tr></table>	Switches	Code	Single changeover	S	Double changeover	D	<table><tr><th>Features</th><th>Code</th></tr><tr><td>None</td><td>N</td></tr><tr><td>Series resistor</td><td>G*</td></tr><tr><td>EOL resistor</td><td>H*</td></tr><tr><td>Diode</td><td>E*</td></tr><tr><td>Tag label</td><td>T*</td></tr><tr><td>Custom duty label</td><td>D*†</td></tr><tr><td>Addressable module (SIGA-CT1)</td><td>M**</td></tr></table>	Features	Code	None	N	Series resistor	G*	EOL resistor	H*	Diode	E*	Tag label	T*	Custom duty label	D*†	Addressable module (SIGA-CT1)	M**	<table><tr><th>Finish</th><th>Code</th></tr><tr><td>Natural Red</td><td>R</td></tr><tr><td>Blue</td><td>B</td></tr><tr><td>Yellow</td><td>Y</td></tr><tr><td>Special</td><td>S*</td></tr></table>	Finish	Code	Natural Red	R	Blue	B	Yellow	Y	Special	S*
Certification	Code																																																		
UL Class I, Div. 1	UL1																																																		
UL Class I, Div. 2	UL2																																																		
UL Ord. Loc.	UW																																																		
Entries	Code																																																		
1/2" NPT	*†M																																																		
3/4" NPT	*†N																																																		
Switches	Code																																																		
Single changeover	S																																																		
Double changeover	D																																																		
Features	Code																																																		
None	N																																																		
Series resistor	G*																																																		
EOL resistor	H*																																																		
Diode	E*																																																		
Tag label	T*																																																		
Custom duty label	D*†																																																		
Addressable module (SIGA-CT1)	M**																																																		
Finish	Code																																																		
Natural Red	R																																																		
Blue	B																																																		
Yellow	Y																																																		
Special	S*																																																		

NOTE: the units can be internally wired to suit customers specifications.
Please discuss your requirements with us.

* Prefix entry size with entry position (see diagram above).
E.g. 2M5M. Maximum 2 Entries.
† UL C1D1 - Max 1 per face. Up to 2x 1/2" NPT or 3/4" NPT.
Positions 2 & 5 only.
UW: Up to 2 x 1/2" or 3/4" NPT.
3/4" NPT, Max. 1 per face & positions 2 & 5 only.

* Please specify.
**To be free issued by the customer.
† Only select if non standard option is required.
Please note that certified blanking plugs cannot be fitted to this product.