

SM87 JB junction boxes range

Ex d



Overview

A metallic junction box for Zone 1 or Zone 2 use.

Available in stainless steel or marine grade alloy.

Various terminals and entries can be accommodated.

Stainless steel, one of the most durable materials available on the market, is both hard wearing and corrosion resistant, increasing the life of products in harsh environments and therefore reducing maintenance costs.

Features

- Zone 1 and Zone 2 use
- Ex d IIC T5/T6
- ATEX approved Ex II 2GD
- IECEx certificated Gb, Db
- IP66 and 67
- Optional telephone or relay initiate
- Optional resistors or diodes



Certifications

ATEX Ex d	Cert. no. Bas03ATEX0463. Certified to: EN60079-0, EN60079-1, EN60079-31. Ex II 2GD, Ex d IIC T4/5/6 Gb, Ex tb IIIC T135/100/85°C Db, IP66/67
IECEX Ex d	Cert. no. IECEX BAS 13.0048 Certified to: IEC60079-0, IEC60079-1, IEC60079-31. Ex d IIC T4/5/6 Gb, Ex tb IIIC T135/100/85°C Db, IP66/67


Specifications

Material	Stainless steel grade 316 ANC4B, marine grade alloy LM25
Finish	Painted to customer specification
Certified temp	-55°C to +85°C (T4) -55°C to +70°C (T5) -55°C to +55°C (T6) T ratings are for units with terminals only
Weight	3.1kg
Ingress protection	IP66 and IP67
Entries	Max. one per face in M20 or M25 ISO
Resistor or diode	Contact sales office for information. Maximum of two components
Relay initiate	Initiate voltage: 24 or 48Vdc Max switching voltage: 250Vac Max switching current: 10A
Telephone initiate	Ringing voltage: 24-70Vac Max switching voltage: 240Vac Max switching current: 2A

Terminal Weidmuller	No. off	Max volts	Max amps	Max conductor size mm ²
BK6	6	400V	32A	4
MK3/10	10	400V	24A	2.5
AKZ4	12	400V	32A	4

Terminal PHOENIX	No. off	Max volts	Max amps	Max conductor size mm ²
MBK2.5	12	250V	24A	2.5
MBK5	12	500V	32A	4
MBK6	10	500V	41A	6

General arrangement drawing (all dimensions in mm)

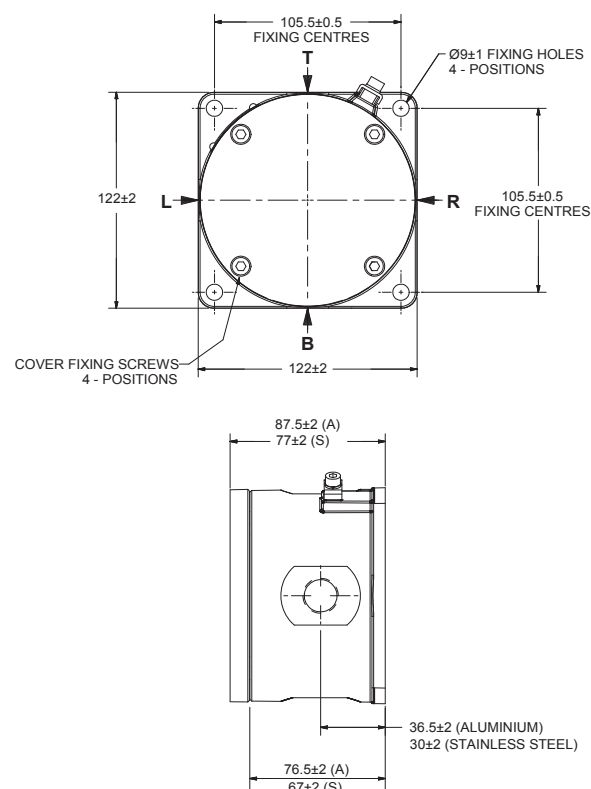

Ordering requirements

The following code is designed to help in selection of the correct unit. Build up the reference number by inserting the code for each component into the appropriate box

Model	Certification	Entries	Terminals	Tag/duty	Options	Finish
SM87JBA (alloy) SM87JBS (stainless steel)	Certification Code ATEX B IECEX J	Entries Code M20 1 M25 2 Please specify Top *T Bottom *B RHS *R LHS *L *Prefix position with entry size code e.g. 1T1B = M20 top and bottom entries	Terminal Code None NN* BK6 11 MK3/10 12 AKZ 4 13 MBK 21 MBK5 22 MBK6 23 *Please select for telephone or relay initiate version	Labels Code None N Yes Y* *Please specify in text	Option Code None N Telephone initiate T Relay initiate R* Resistors St Diodes Dt *Please specify voltage †Please specify values and wiring arrangement Max of two components	Colour Code Red R Blue B Yellow Y Yellow/black stripes X Grey G Special S* *Special finish please specify