

Hazardous Location, Weatherproof



Features

- UL listed for USA and Canada.
 - Hazardous locations:
 - Class I, Div. 2, Groups C & D.
 - Class I, Zones 1 & 2, AExd IIB T5.
 - Ordinary locations: Visual-Signal Device.
- CSFM approved.
- ATEX approved.
- Xenon.
- Output 22,000 Candela.
- NEMA 4x and 6, IP66 & 67.
- 24V d.c., 110 & 240V a.c.
- Certified temperature: –67°F to +158°F.
–55°C to +70°C.
- 4 wire monitored connection.
- Corrosion resistant GRP.
- Optional stainless steel backstrap.
- Various lens colours.
- Optional lens guard.
- Available as a status light.


Introduction

These certified strobes have been designed for use in potentially explosive atmospheres and harsh environmental conditions. The glass reinforced polyester enclosure is suitable for use onshore and offshore, where light weight combined with a high level of corrosion is required.

The strobe housing is manufactured completely from a U.V. stable, glass reinforced polyester. Stainless steel screws and mounting bracket are incorporated ensuring a totally corrosion free product.

Units can be painted to customer specification and supplied with identification labels.

European, Chinese and other worldwide approvals are available, refer to main section of catalogue.



Certification and Specification

Certification:	UL Listed for USA and Canada. – Hazardous locations: Class I, Div. 2, Groups C & D. Class I Zones 1 & 2, AExd IIB T5. UL Listing No. E187894. – Ordinary locations: Visual-Signal Device. UL Listing No. S8128.
Material:	Body: Glass reinforced polyester. Lens: Glass. Cover Screws + Backstrap: Stainless steel 316.
Finish:	Natural black or painted to customer specification.
Weight:	5½ lb/2.5kg.
Certified Temp:	–67°F to +158°F (–55°C to +70°C.) hazardous locations. –67°F to +131°F (–55°C to +55°C) ordinary locations.
Ingress Protection:	NEMA 4x and 6, IP66 & 67.
Terminals:	6 off suitable for up to 14 AWG conductor size.
Labels:	Duty/Tag Label optional.
Entries:	2 x ½" NPT.
Strobe/Sounder Unit:	The beacon may be combined with an MEDC sounder to create a visual/audible alarm. Contact MEDC for price and specification.
Tube Life:	> 1 x 10 ⁶ Flashes

Electrical Ratings:


	d.c.	a.c. 50/60Hz	
Voltage	24	110	240
XB11 Tube Energy (Joules)	5	5	5
Peak Current Consumption (mA)	320	100	60
Effective Intensity (Cd)	29	29	29
Peak Intensity (Cd)	22213	22213	22213
Power Consumption (Watts)	8	11	18

NOTE: The Cd figures are for a clear lens @ 1Hz flash rate.

Multiplying Factor for Coloured Lenses:

Red	Blue	Amber	Green	Yellow
0.15	0.12	0.51	0.49	0.86

The photometric data given above has been verified by BSI. Reports are available if required.

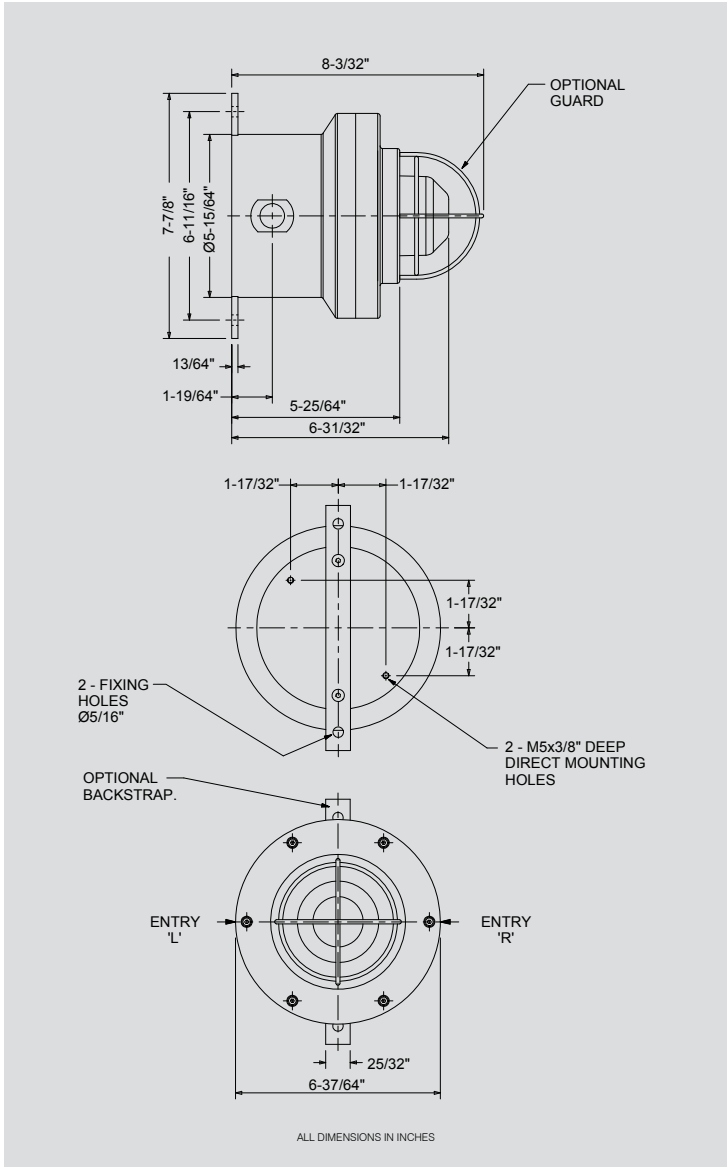

Ordering Requirements

The following code is designed to help in selection of the correct unit. Build up the reference number by inserting the code for each component into the appropriate box.

Model XB11	Certification 	Voltage 	Flashrate 	Lens Colour 	Lens Guard 	Fixing 	Earth Continuity N	Tag/Duty 	Options 	Finish 																																										
	<table><tr><th>Certification</th><th>Code</th></tr><tr><td>UL</td><td>UL</td></tr><tr><td>UL (ordinary locations)</td><td>UW</td></tr></table>	Certification	Code	UL	UL	UL (ordinary locations)	UW		<table><tr><th>Flashrate</th><th>Code</th></tr><tr><td>60 / min</td><td>06</td></tr></table> Other flash rates available, please specify.	Flashrate	Code	60 / min	06		<table><tr><th>Guard</th><th>Code</th></tr><tr><td>None</td><td>N</td></tr><tr><td>Yes</td><td>Y</td></tr></table>	Guard	Code	None	N	Yes	Y		<table><tr><th>Continuity</th><th>Code</th></tr><tr><td>None</td><td>N</td></tr></table>	Continuity	Code	None	N		<table><tr><th>Options</th><th>Code</th></tr><tr><td>None</td><td>N</td></tr><tr><td>Blanking Plug</td><td>P</td></tr></table>	Options	Code	None	N	Blanking Plug	P	<table><tr><th>Finish</th><th>Code</th></tr><tr><td>Natural Black</td><td>N</td></tr><tr><td>Red</td><td>R</td></tr><tr><td>Blue</td><td>B</td></tr><tr><td>Yellow</td><td>Y</td></tr><tr><td>Gray</td><td>G</td></tr><tr><td>White</td><td>W</td></tr><tr><td>Special</td><td>S*</td></tr></table> * Please specify.	Finish	Code	Natural Black	N	Red	R	Blue	B	Yellow	Y	Gray	G	White	W	Special	S*
Certification	Code																																																			
UL	UL																																																			
UL (ordinary locations)	UW																																																			
Flashrate	Code																																																			
60 / min	06																																																			
Guard	Code																																																			
None	N																																																			
Yes	Y																																																			
Continuity	Code																																																			
None	N																																																			
Options	Code																																																			
None	N																																																			
Blanking Plug	P																																																			
Finish	Code																																																			
Natural Black	N																																																			
Red	R																																																			
Blue	B																																																			
Yellow	Y																																																			
Gray	G																																																			
White	W																																																			
Special	S*																																																			
		<table><tr><th>Voltage</th><th>Code</th></tr><tr><td>24V d.c.</td><td>024</td></tr><tr><td>48V d.c.</td><td>048</td></tr><tr><td>110V a.c.</td><td>110</td></tr><tr><td>120V a.c.</td><td>120</td></tr><tr><td>240V a.c.</td><td>240</td></tr></table>	Voltage	Code	24V d.c.	024	48V d.c.	048	110V a.c.	110	120V a.c.	120	240V a.c.	240		<table><tr><th>Lens Colour</th><th>Code</th></tr><tr><td>Red</td><td>R</td></tr><tr><td>Blue</td><td>B</td></tr><tr><td>Green</td><td>G</td></tr><tr><td>Amber</td><td>A</td></tr><tr><td>Yellow</td><td>Y</td></tr><tr><td>Clear</td><td>C</td></tr></table>	Lens Colour	Code	Red	R	Blue	B	Green	G	Amber	A	Yellow	Y	Clear	C	<table><tr><th>Fixings</th><th>Code</th></tr><tr><td>Direct mount</td><td>D</td></tr><tr><td>without backstrap</td><td></td></tr><tr><td>Direct mount</td><td>B</td></tr><tr><td>with backstrap</td><td></td></tr></table>	Fixings	Code	Direct mount	D	without backstrap		Direct mount	B	with backstrap		<table><tr><th>Label</th><th>Code</th></tr><tr><td>None</td><td>N</td></tr><tr><td>Yes</td><td>Y*</td></tr></table> *Please specify.	Label	Code	None	N	Yes	Y*				
Voltage	Code																																																			
24V d.c.	024																																																			
48V d.c.	048																																																			
110V a.c.	110																																																			
120V a.c.	120																																																			
240V a.c.	240																																																			
Lens Colour	Code																																																			
Red	R																																																			
Blue	B																																																			
Green	G																																																			
Amber	A																																																			
Yellow	Y																																																			
Clear	C																																																			
Fixings	Code																																																			
Direct mount	D																																																			
without backstrap																																																				
Direct mount	B																																																			
with backstrap																																																				
Label	Code																																																			
None	N																																																			
Yes	Y*																																																			

To order ATEX approved version, see European data sheet.

All specifications, dimensions, weights and tolerances are nominal (typical) and MEDC reserve the right to vary all data without prior notice. No liability is accepted for any consequence of use.